

# A Study on PWM Rectifier for Battery Charging Applications – A Review



Shwetha G., Guruswamy K P.

**Abstract:** Electric Vehicles (EV) are becoming more popular in present scenario because it can be easily charged using charger. Thus, the chargers play a vital role in EV vehicle. Hence, many distinct types of EV charging technologies have been developed so far. This paper reviews an effective and quick charging approach which extends the life cycle of a battery with high charging efficiency. This article also presents about characteristics of charger in terms of converter topologies, modulation schemes and control algorithms.

**Keywords:** Electric Vehicles, Converter, Modulation Schemes, Battery Charger.

## I. INTRODUCTION


Exhaust gas from vehicles due to fossil fuels is a major source of pollution in the environment. In response to the growing battery market and environmental pollution concerns, various battery operated technologies such as EV, ESS and LEV have been recently developed. This emission free vehicles can alleviate the air pollution problem. It also requires less maintenance and less noise is produced when compared to a standard car. The charging of the EVs batteries is one of the most important aspects of the vehicle. EV battery chargers can be built within the vehicle or used separately as an off-board charger. The energy flowing between grids and EV batteries are made possible with unidirectional or bidirectional converter. Grid-vehicle and vehicle-grid charger applications utilize unidirectional power flow chargers, while grid-vehicle and vehicle-grid charger applications encourage the design of bidirectional charger. Thus, this study provides an overview of modern battery charging infrastructure for EVs.

## II. BATTERY CHARGING CONVERTER

For the quick charging of batteries, a variety of converter topologies are available. In this paper, some viable choices are highlighted. They are as follows:

### 2.1 Single Phase Current Source PWM Rectifier

Figure 1 shows the power circuit for the single phase PWM rectifiers. From the figure 1 (a) it is observed that while the neutral leg is switched, intermediate voltage levels of each capacitor at the input filter contributes the output voltage (e.g.,  $V_{c1}$  or  $V_{c2}$ ). But it will results in additional switching states and hence there will be a reduction in output voltage. Similarly, due to higher number of switching sequences, the output voltage gets distorted. Hence, its efficiency gets reduced.

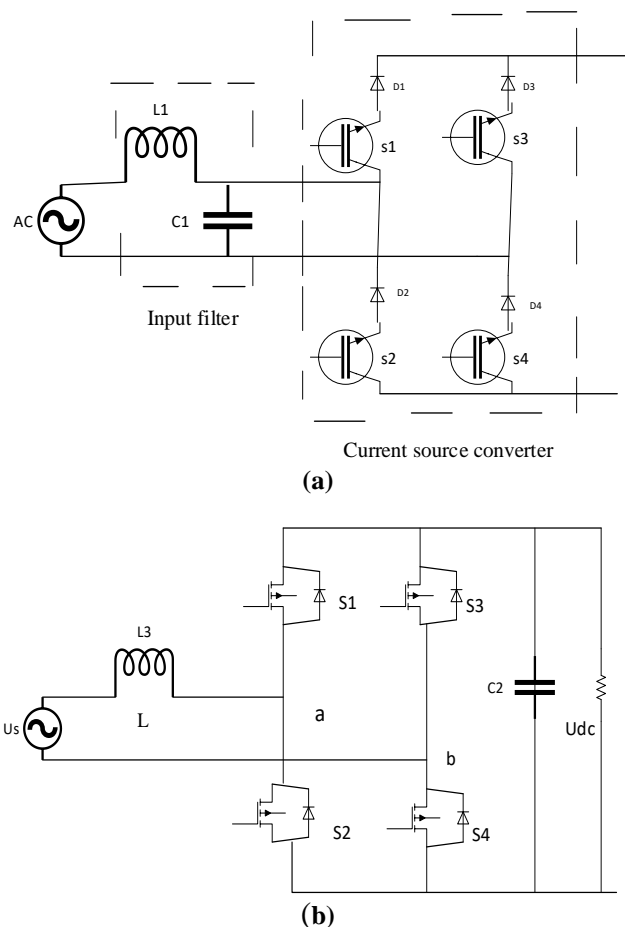

**Figure 1. (a) Single Phase current source rectifier. (b) Single Phase voltage source rectifier.**

Current ripples presented in the Single phase onboard charging systems of EVs have an impact on battery life. Isolated multifunctional charger architecture [1] was proposed to solve this problem. The proposed architecture serves as a battery charger and also as an active filter (AF) for the battery charger. Thus, results in minimized current ripple. Similarly, the pulsating power delivered by the AC at the line frequency causes 2<sup>nd</sup> harmonic ripple voltage on the DC link.

Manuscript received on 24 May 2022.  
Revised Manuscript received on 27 May 2022.  
Manuscript published on 30 June 2022.

\* Correspondence Author

**Shwetha G.\***, Ph.D. Research Scholar, Department of Electrical and Electronics, UVCE, Bangalore University, Bangalore (Karnataka), India. Email: [m.g.shwetha99@gmail.com](mailto:m.g.shwetha99@gmail.com)


**Guruswamy K P.**, Associate Professor, Department of Electrical and Electronics, UVCE, Bangalore University, Bangalore (Karnataka), India. Email: [kpg\\_eeuvce@bub.ernet.in](mailto:kpg_eeuvce@bub.ernet.in)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>


To eliminate this, an inductance based AF utilizing machine windings leakage inductance and a current compensation control approach has been developed [2].

Although the bridge rectifiers (diode) are inexpensive, durable and simple to install, their operation is not smooth. The diode bridge has a higher loss rate. So, 3 phase rectifiers were introduced to address issues of diode bridge rectifiers.

2. 2 Three Phase Current Source PWM Rectifier

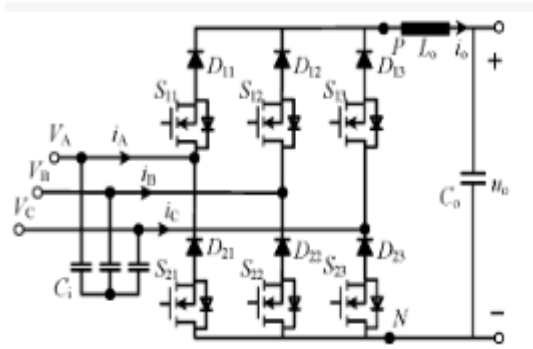

(a)

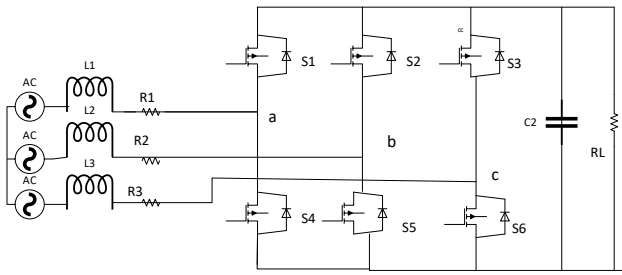

(b)

Fig 2 (a) Three Phase current source rectifier. (b) Three Phase voltage source rectifier.

Due to its higher electromagnetic compatibility (EMC), 3 Phase current source rectifiers are becoming more common as the front end converter in power electronic systems. The circuit of this rectifier is shown in Fig. 2. The proposed rectifier comprises 6 controllable switches. In this illustration, antiparallel diodes of IGBTs in commercial power modules are depicted. Additional diodes are connected in series with the transistors because of low reverse voltage blocking capacity of IGBT. The DC side of the circuit is coupled with a smoothing inductor to obtain smoothed output. 3Phase voltage source rectifier is the most viable topology for battery charging circuit utilized in EV. It has simple structure, with compact inductor. It also exhibits low THD at the output current. An improved DPC for a 3phase rectifier has been developed. Duty cycle control has been formulated to control the period to the voltage vector [5]. To reduce the odd order harmonics in supply line side currents, a digital plugin frequency domain based repeated control system was devised [9]. To achieve voltage regulation under dynamic load condition, 3phase Voltage Source Rectifiers (VSRs) controlled using a DC bus voltage switched control mechanism is formulated [10]. For fast charging, rectifier with SPWM based topology was designed [18-20]. Even though a variety of battery charger topologies for electric vehicles have been devised, they are vulnerable to input side fluctuations. As a result, there will be reduction in PF and

higher harmonics. As a result, controllers must be incorporated to ensure the charger’s stability.

III. CONTROL STRATEGIES OF ENERGY EFFICIENT CONVERTERS

To increase the dynamic response of single phase rectifiers, various control methods have been devised. PID controllers are a common closed loop control technique in many industrial control systems. Figure 3 depicts the schematic diagram of a PID controller.

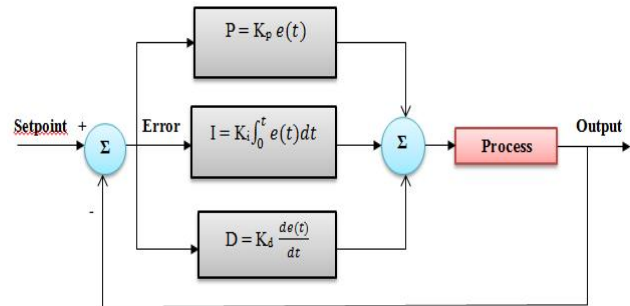


Figure 3. Block diagram of a PID controller.

To improve the dynamic response of a 1phase PWM rectifier, deadbeat predictive current control (DPCC) have been introduced [3].

The effectiveness of the proposed deadbeat control method's are confirmed by simulation and empirical findings. However, PID controllers developed for rectifiers have certain limitations. In nonlinear applications, its performance is variable and noise in the process causes changes in the system's output. Fuzzy controllers have been used to solve this problem and can able to enhance the dynamic response of the converters. FLCs are intelligent control systems which can make decisions based on expert knowledge or experience. The block diagram of FLC is presented in Figure 4.

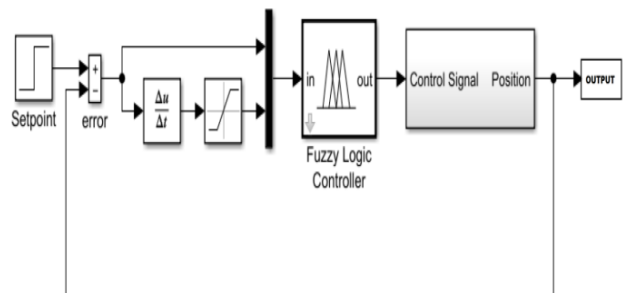


Figure 4 Schematic representation of FLC.

The dead band controller for a 3phase rectifier system was devised [4]. FL is incorporated in this architecture to predict the parameter in the deadbeat controller.

The experimental results validated the proposed control strategy. To achieve high performance control, controller design for 6 switch PWM VSRs was carried out with rotating d-q frame coordinates. Lee et al. (2011) proposed a simplified Park Transformation topology that was tested using 6 switch PWM VSR [6]. The results showed that the d-q frame controllers are superior to conventional controllers.

A unique and simple DPC technique for a 3phase PWM rectifier was developed without any predefined switching table. In this, FL rules are utilized to decide the switching state and the instantaneous active and reactive power tracking error serves as a FL variables. The results have demonstrated good performance and suggested that proposed DPC scheme is significantly superior to classical DPC [7]. As a result, a greater variety of topologies for battery charging applications in EV systems have been created to date.

#### IV. PWM TOPOLOGY


In commercial AC motor drives, a 3phase VSI is widely for controlling. In this, the gating signals should be pulled ahead or delayed by 120° to provide 3phase balanced voltages. Two alternative PWM topologies, notably SVM and SVPWM have been frequently employed to achieve these switching signals. In order to produce converter gate signals, SPWM compares a sinusoidal reference voltage with a triangular carrier signal. SVPWM topology has become a common PWM technique in applications like control of AC induction motor etc. It's a more advanced technique which generates a higher voltage with lower THD at its output.

**Table 1. Comparison of development of battery charging topologies for EV applications in terms of their configuration and switching topology.**

Author	Configuration	Modulation techniques
Yun Zhang , 2020	Single phase	
Yun Zhang, 2019	Single phase	Current compensation
Ping Wang, 2019	Single phase	Dead beat control
Lijun Hang, 2010	Three phase	Deadbeat
Yongchang Zhang, 2012	Three phase	Direct power control
Tzann-Shin Lee, 2011	Three phase	sinusoidal PWM
Abdelouahab Bouafia, 2009	Three phase	Direct power control
X. H. Wu, 2010	Three phase	Digital repetitive control
X. H. Wu, 2008	Three phase	Frequency domain based repetitive control
Wei Zhang, 2012	Three phase	d-q
Bor-Ren Lin 2000 [11]	Three phase	Inverter based diode clamp
Rajesh Ghosh, 2008 [12]	Three phase	CSPWM
Bor-Ren Lin, 1999 [13]	Single phase	Hysterises current control
X. H. Wu, 2008 [14]	Three phase	Instantaneous power flow
Hidenori Tanaka, 2015 [15]	Single phase	Reactive power control
Toshihiko Tanaka, 2013 [16]	Single phase	Power quality compensator
Shu-Zu Dai, 1992 [17]	Single phase	SPWM
Junjie Ge, 2014	Three phase	Direct power control
Flabio Alberto Bardemaker Batista, 2006	Three phase	Space vector modulation
Amirhossein Moeini, 2016	Single phase	SHCM-PWM
Toshihisa Shimizu, 1997 [21]	Single phase	Conventional PWM
Chien-Ming Wang, 2004 [22]	Single phase	Zcs-PWM
Sheng-Yuan Ou, 2011 [23]	Single phase	Voltage balance control
Zhiyong Zeng, 2015 [24]	Single phase	SVM
Ruxi Wang, 2010 [25]	Single phase	Energy storage capacitor
Jinhui Xia, 2017 [26]	Single phase	Sliding mode observer
Feng Wu, 2016 [27]	Three phase	Open circuit fault diagnosis
Guan-Chyun Hsieh ,1999 [28]	Single phase	FWBR
Adel Rahoui, 2020 [29]	Three phase	VF-PDPC
Feng Wu, 2017 [30]	Three phase	Primary inductances energy analysis

**Table 2. Comparison of development of battery charging topologies for EV applications in terms of their efficiency.**

Author	Efficiency (%)
Yongchang Zhang, 2013	90
Tzann-Shin Lee, 2011	88
Bor-Ren Lin 2000	88
Bor-Ren Lin, 1999	90
Toshihisa Shimizu, 1997	88
Chien-Ming Wang, 2006	98.3
Sheng-Yuan Ou, 2012	95
Guan-Chyun Hsieh, 1999	95

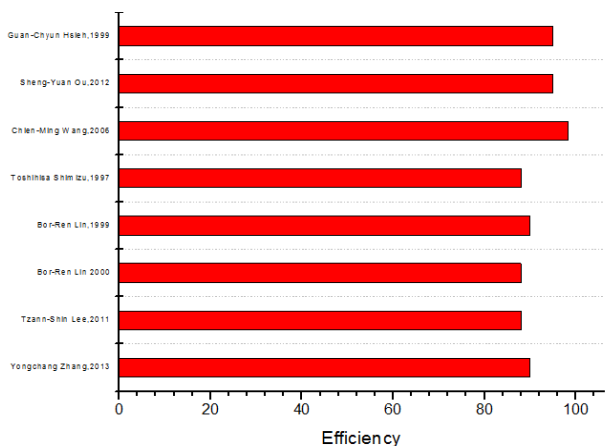

**Figure 5. Comparison of development of battery charging topologies for EV applications in terms of their efficiency.**

## V. CONCLUSION

The first section of this paper analyses the various charging topologies adopted for EV. The controllers developed for the improvement of their performance are discussed in the next section. Based on this study, it can be inferred that the controller's performance is more important for enhancement of the battery charging system. It can also be inferred that adopting AI-based controllers will increase the performance of battery charging unit in terms of power factor and efficiency.

## REFERENCES

- Zhang, Y., Fang, J., Gao, F., Gao, S., Rogers, D.J. and Zhu, X., 2020. Integrated High-and Low-Frequency Current RippleSuppressions in a Single-Phase Onboard Charger for EVs. *IEEE Transactions on Power Electronics*, 36(2), pp.1717-1729. [CrossRef]
- Zhang, Y., Fang, J., Gao, F., Song, T., Gao, S. and Rogers, D.J., 2019. Second-harmonic ripple voltage suppression of integrated single-phase pulsewidth modulation rectifier charging system for EVs. *IEEE Transactions on Power Electronics*, 35(4), pp.3616-3626. [CrossRef]
- Wang, P., Bi, Y., Gao, F., Song, T. and Zhang, Y., 2019. An improved deadbeat control method for single-phase PWM rectifiers in charging system for EVs. *IEEE Transactions on Vehicular Technology*, 68(10), pp.9672-9681. [CrossRef]
- Hang, L., Liu, S., Yan, G., Qu, B. and Lu, Z.Y., 2010. An improved deadbeat scheme with fuzzy controller for the grid-side three-phase PWM boost rectifier. *IEEE Transactions on Power Electronics*, 26(4), pp.1184-1191. [CrossRef]
- Zhang, Y., Li, Z., Zhang, Y., Xie, W., Piao, Z. and Hu, C., 2012. Performance improvement of direct power control of PWM rectifier with simple calculation. *IEEE Transactions on Power Electronics*, 28(7), pp.3428-3437. [CrossRef]

- Lee, T.S. and Liu, J.H., 2011. Modeling and control of a three-phase four-switch PWM voltage-source rectifier in dq synchronous frame. *IEEE Transactions on Power Electronics*, 26(9), pp.2476-2489. [CrossRef]
- Bouafia, A., Krim, F. and Gaubert, J.P., 2009. Fuzzy-logic-based switching state selection for direct power control of three-phase PWM rectifier. *IEEE transactions on industrial electronics*, 56(6), pp.1984-1992. [CrossRef]
- Wu, X.H., Panda, S.K. and Xu, J.X., 2010. Design of a plug-in repetitive control scheme for eliminating supply-side current harmonics of three-phase PWM boost rectifiers under generalized supply voltage conditions. *IEEE Transactions on Power Electronics*, 25(7), pp.1800-1810. [CrossRef]
- Wu, X.H., Panda, S.K. and Xu, J.X., 2008. DC link voltage and supply-side current harmonics minimization of three phase PWM boostrectifiers using frequency domain based repetitive current controllers. *IEEE Transactions on Power Electronics*, 23(4), pp.1987-1997. [CrossRef]
- Zhang, W., Hou, Y., Liu, X. and Zhou, Y., 2010. Switched control of three-phase voltage source PWM rectifier under a wide-range rapidly varying active load. *IEEE Transactions on Power Electronics*, 27(2), pp.881-890. [CrossRef]
- Lin, B.R., 2000. Analysis and implementation of a three-level PWM rectifier/inverter. *IEEE Transactions on Aerospace and electronic systems*, 36(3), pp.948-956. [CrossRef]
- Ghosh, R. and Narayanan, G., 2008. Control of three-phase, four-wire PWM rectifier. *IEEE Transactions on Power Electronics*, 23(1), pp.96-106. [CrossRef]
- Lin, B.R. and Lu, H.H., 1999. A new control scheme for single-phase PWM multilevel rectifier with power-factor correction. *IEEE Transactions on Industrial Electronics*, 46(4), pp.820-829. [CrossRef]
- Wu, X.H., Panda, S.K. and Xu, J.X., 2008. Analysis of the instantaneous power flow for three-phase PWM boost rectifier under unbalanced supply voltage conditions. *IEEE Transactions on Power Electronics*, 23(4), pp.1679-1691. [CrossRef]
- Tanaka, H., Ikeda, F., Tanaka, T., Yamada, H. and Okamoto, M., 2015. Novel reactive power control strategy based on constant DC-capacitor voltage control for reducing the capacity of smart charger for electric vehicles on single-phase three-wire distribution feeders. *IEEE Journal of Emerging and Selected Topics in Power Electronics*, 4(2), pp.481-488. [CrossRef]
- Tanaka, T., Sekiya, T., Tanaka, H., Okamoto, M. and Hiraki, E., 2013. Smart charger for electric vehicles with power-quality compensator on single-phase three-wire distribution feeders. *IEEE Transactions on Industry Applications*, 49(6), pp.2628-2635. [CrossRef]
- Dai, S.Z., Lujara, N. and Ooi, B.T., 1992. A unity power factor current-regulated SPWM rectifier with a notch feedback for stabilization and active filtering. *IEEE transactions on power electronics*, 7(2), pp.356-363. [CrossRef]
- Ge, J., Zhao, Z., Yuan, L., Lu, T. and He, F., 2014. Direct power control based on natural switching surface for three-phase PWM rectifiers. *IEEE Transactions on Power Electronics*, 30(6), pp.2918-2922. [CrossRef]
- Alberto, F., Batista, B. and Barbi, I., 2006, March. Space vector modulation applied to three-phase three-switch two-level unidirectional PWM rectifier. In *Twenty-First Annual IEEE Applied Power Electronics Conference and Exposition, 2006. APEC'06.* (pp. 7-pp). IEEE.
- Moieni, A., Zhao, H. and Wang, S., 2016. A current-reference-based selective harmonic current mitigation PWM technique to improve the performance of cascaded H-bridge multilevel active rectifiers. *IEEE Transactions on Industrial Electronics*, 65(1), pp.727-737. [CrossRef]
- Shimizu, T., Fujita, T., Kimura, G. and Hirose, J., 1997. A unity power factor PWM rectifier with DC ripple compensation. *IEEE Transactions on industrial electronics*, 44(4), pp.447-455. [CrossRef]
- Wang, C.M., 2004, February. A new single-phase ZCS-PWM boost rectifier with high power factor and low conduction losses. In *Nineteenth Annual IEEE Applied Power Electronics Conference and Exposition, 2004. APEC'04.* (Vol. 3, pp. 1458-1464). IEEE.
- Ou, S.Y., Tang, C.Y. and Chen, Z.J., 2011. Design and implementation of a ZCS-PWM half-bridge boost rectifier with output voltage balance control. *IEEE Transactions on Industrial Electronics*, 59(12), pp.4646-4656. [CrossRef]

24. Zeng, Z., Zheng, W., Zhao, R., Zhu, C. and Yuan, Q., 2015. Modeling, modulation, and control of the three-phase four-switch PWM rectifier under balanced voltage. *IEEE Transactions on Power Electronics*, 31(7), pp.4892-4905. [[CrossRef](#)]
25. Wang, R., Wang, F., Boroyevich, D., Burgos, R., Lai, R., Ning, P. and Rajashekara, K., 2010. A high power density single-phase PWM rectifier with active ripple energy storage. *IEEE Transactions on Power Electronics*, 26(5), pp.1430-1443. [[CrossRef](#)]
26. Xia, J., Guo, Y., Dai, B. and Zhang, X., 2017. Sensor fault diagnosis and system reconfiguration approach for an electric traction PWM rectifier based on sliding mode observer. *IEEE Transactions on Industry Applications*, 53(5), pp.4768-4778. [[CrossRef](#)]
27. Wu, F. and Zhao, J., 2016. Current similarity analysis-based open-circuit fault diagnosis for two-level three-phase PWM rectifier. *IEEE Transactions on Power Electronics*, 32(5), pp.3935-3945. [[CrossRef](#)]
28. Hsieh, G.C. and Wang, C.M., 1999. ZCS-PWM full-wave boost rectifier with unity power factor and low conduction losses. *IEEE Transactions on Industrial Electronics*, 46(4), pp.768-779. [[CrossRef](#)]
29. Rahoui, A., Bechouche, A., Seddiki, H. and Abdeslam, D.O., 2020. Virtual flux estimation for sensorless predictive control of PWM rectifiers under unbalanced and distorted grid conditions. *IEEE Journal of Emerging and Selected Topics in Power Electronics*, 9(2), pp.1923-1937. [[CrossRef](#)]
30. Wu, F., Zhao, J., Liu, Y., Zhou, D. and Luo, H., 2017. Primary source inductive energy analysis based real-time multiple open-circuit fault diagnosis in two-level three-phase PWM boost rectifier. *IEEE Transactions on Power Electronics*, 33(4), pp.3411-3423. [[CrossRef](#)]

### AUTHORS PROFILE



**Shwetha G.**, received the M.tech in Electrical Engineering from Ghousia College of Engineering, Bangaluru, Karnataka, India in 2016. She is currently pursuing a Ph.D. in Electrical Engineering, University Visvesvaraya College of Engineering, Bangaluru, Karnataka, India. Her current research interests include Design of PWM Rectifier, resonant converters. E-mail:

[m.g.shwetha99@gmail.com](mailto:m.g.shwetha99@gmail.com)



**Guruswamy K.P.**, is an Associate professor, Department of Electrical Engineering, University Visvesvaraya College of Engineering, Bangaluru, Karnataka, India. He obtained his BE and ME in Electrical Engineering from University Visvesvaraya College of Engineering, Bangaluru. He was awarded Ph.D. in Electrical Engineering from IIT Roorkee. His

research interests include Modelling of Power Converters, Digital Control of Converters and Resonant Converters. E-mail: [kpg\\_eeuvc@bub.ernet.in](mailto:kpg_eeuvc@bub.ernet.in)