

# U - Slot Loaded Broadband Rectangular Microstrip Antenna

Rajesh Kumar Verma, P. K. Singhal

**Abstract** - To enhance the bandwidth, a new design of rectangular microstrip antenna is presented. The proposed geometry consists of an E – shaped ground plane structure, a truncated radiating patch layer and a U- slot loaded patch layer. The radiating patch layer and U slot loaded patch layer are separated using a thick air substrate (10 mm) to enhance the bandwidth. The two major impedance BWs determined are 40 % at centre frequency 3815 MHz and 29 % at centre frequency 5995 MHz. The microstrip antenna is fed by a coaxial probe. The proposed geometry provides a band of 1530 MHz (3.05 GHz to 4.58 GHz) and of 1750 MHz (5.12 GHz to 6.87 GHz) that is suitable for certain frequencies of S band as well as of C band applications. Also, the proposed geometry provides a peak directivity 6.59 dBi, gain 4.78 dBi, axial ratio 42.46 dB, aperture efficiency 85.7 %, radiation efficiency 89 % for a band (3.05 GHz to 4.58 GHz) whereas for a band of (5.12 GHz to 6.87 GHz) the proposed geometry provides a peak directivity 6.22 dBi, gain 4.32 dBi, axial ratio 70.9 dB, aperture efficiency 68.8 %, radiation efficiency 70 %. All the simulations are carried out using Zeland IE3D simulation software for a dielectric substrate with dielectric constant 4.4 and loss tangent 0.02.

**Keywords:** Broadband, RMSA, Truncated.

## I. INTRODUCTION

An MSA in its simplest form consists of a radiating patch on one side of a dielectric substrate and a ground plane on the other side as shown in figure 1.1. There are different shapes of the microstrip antenna, such as the square, circular, triangular, semicircular, sectoral, annular ring, but the most common is rectangular. Due to its advantages such as low weight, low profile, low fabrication cost and capability to integrate with microwave integrated circuits technology, the microstrip antennas are well suited for applications such as wireless communication systems, cellular phones, pagers, radar and satellite communication systems [1-3]-[5-8]. A major drawback of the MSAs is that they have a narrow bandwidth, typically 1 – 5% which is the major limiting factor for the widespread application of these antennas.

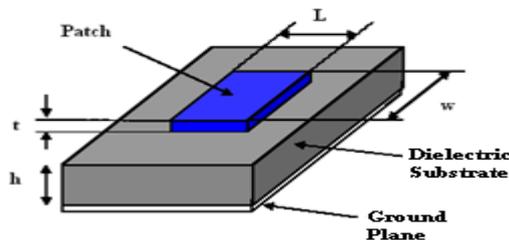


Fig. 1.1 Rectangular microstrip antenna

Manuscript published on 30 April 2013.

\* Correspondence Author (s)

Rajesh Kumar Verma Deptt. Of Electronics & Comm. Engg., I.E.T., Bundelkhand University, Jhansi (UP) – India.

Prof. P. K. Singhal Deptt. Of Electronics & Comm. Engg., M.I.T.S., Gwalior (MP) – India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

The BW of the MSAs can be increased by using the modified shape patches, planar multiresonator configurations, multilayer configurations, stacked multiresonator configurations [8, 17].

In this paper, a new prototype is presented which consist of an E-shaped ground plane, a truncated radiating patch and a U slot loaded RMSA. The radiating patch layer and U slot loaded patch layer are separated using a thick air substrate (10 mm) to enhance the bandwidth. A previous study of U slot loaded RMSA with an air substrate of 12 mm provides the impedance BW of 27.5 % at centre frequency 1815 MHz [4], another U slot loaded triangular microstrip antenna with an air substrate of 14.3 mm provides the impedance BW of 18.3% at centre frequency 1677 MHz [15], whereas in this paper dual bands are achieved with impedance BW 40 % at centre frequency 3815 MHz and 29 % at centre frequency 5995 MHz.

## II. ANTENNA DESIGN

A typical design of rectangular microstrip antenna has been presented here and results are discussed at centre frequency of 2.0 GHz. The width and length of the patch are given by [1, 8]:--

$$w = \frac{c}{2f\sqrt{(\epsilon_r+1)/2}} \quad (1)$$

$$L = L_{\text{eff}} - 2\Delta L \quad (2)$$

$$\Delta L = \frac{0.412h [\epsilon_{\text{eff}}+0.300] \left[ \left( \frac{w}{h} \right) + 0.264 \right]}{[\epsilon_{\text{eff}}-0.285] \left[ \left( \frac{w}{h} \right) + 0.8 \right]} \quad (3)$$

$$\epsilon_{\text{eff}} = (\epsilon_r+1)/2 + [(\epsilon_r-1)/2] (1+12h/W)^{-1/2} \quad (4)$$

$$L_{\text{eff}} = \frac{c}{2f\sqrt{\epsilon_{\text{eff}}}} \quad (5)$$

Where,

C = velocity of light,

$\epsilon_r$  = dielectric constant of substrate,

f = operating frequency

$\epsilon_{\text{eff}}$  = effective dielectric constant,

$L_{\text{eff}}$  = effective length,

$\Delta L$  = edge extension

For designing the proposed antenna, the following

parameters are used:--

Design frequency = 2.0 GHz

Dielectric constant = 4.4

Loss tangent = 0.02

Thickness of substrate = 1.6 mm

Length of the radiating patch L = 36 mm

Width of the radiating patch W = 46 mm



## U - Slot Loaded Broadband Rectangular Microstrip Antenna

Length of the ground plane $L_g$	=	46 mm
Width of the ground plane $W_g$	=	56 mm
Length of the slot $L_s$	=	42 mm
Width of the slot $W_s$	=	4 mm
Truncated corner	=	$6 \times 6$ mm
Length of the upper patch $L_u$	=	30 mm
Width of the upper patch $W_u$	=	40 mm
Dimensions of U slot	=	$20 \times 20$ mm
Width of U slot	=	2 mm

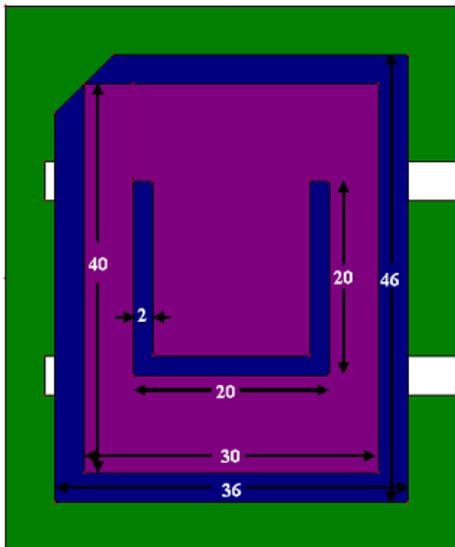


Fig 1.2 U slot loaded Rectangular microstrip antenna .

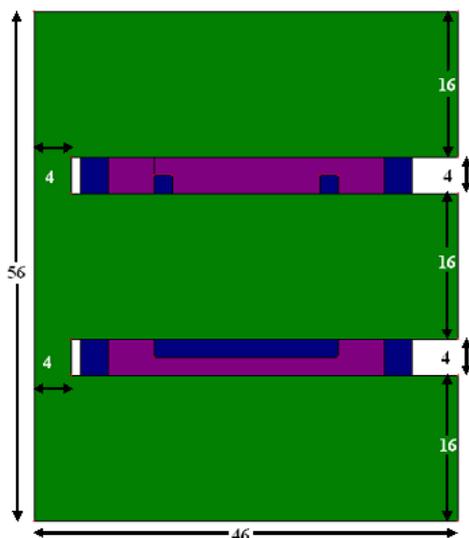


Fig 1.3 E- shaped ground plane Geometry of RMSA.

### III. RESULTS & DISCUSSIONS

The truncated rectangular microstrip antenna with E – shaped ground plane resonates at different frequencies such as 1.57 GHz, 1.71 GHz, 1.93 GHz, 2.34 GHz, 3.26 GHz, 3.79 GHz, 4.09 GHz, 4.4 GHz, 5.49 GHz, 6.25 GHz, with maximum impedance BW = 36.9 % (3.16 GHz to 4.59 GHz) at center frequency 3875 MHz and 20.8 % at centre frequency 5825 MHz Now, another layer of U - slot loaded microstrip antenna is added to this geometry. Previous geometry (truncated RMSA with E shaped ground plane) and the U – slot loaded layer are separated using a thick air substrate (10 mm) to enhance the bandwidth. The new RMSA is simulated which resonates at different frequencies

such as 0.65GHz, 1.5 GHz, 1.79 GHz, 2.16 GHz, 2.32 GHz, 3.15 GHz, 3.74 GHz, 4.39 GHz, 5.44 GHz, 6.28 GHz, with maximum impedance BW = 40 % (3.05 GHz to 4.58 GHz) at center frequency 3815 MHz and 29 % at centre frequency 5995 MHz The new impedance BW is approximately 10 times the BW of the RMSA with dimensions  $L \times W$ . Also, the proposed geometry provides a peak directivity 6.59 dBi, gain 4.78 dBi, axial ratio 42.46 dB, aperture efficiency 85.7 %, radiation efficiency 89 % for a band (3.05 GHz to 4.58 GHz) whereas for a band of (5.12 GHz to 6.87 GHz) the proposed geometry provides a peak directivity 6.22 dBi, gain 4.32 dBi, axial ratio 70.9 dB, aperture efficiency 68.8 %, radiation efficiency 70 %.

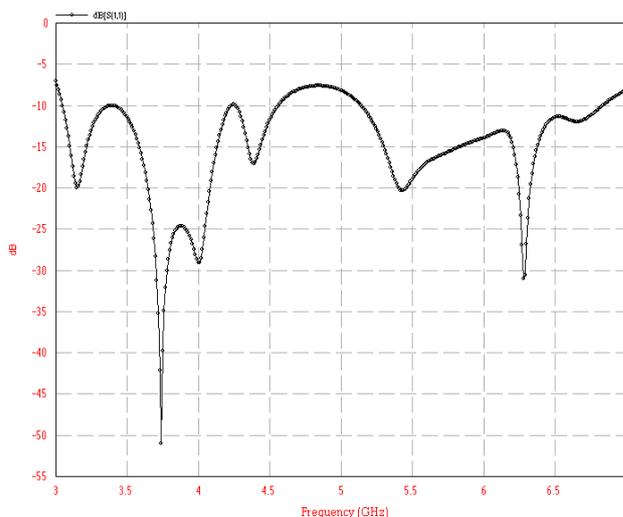


Fig 1.4 Return loss Vs Frequency

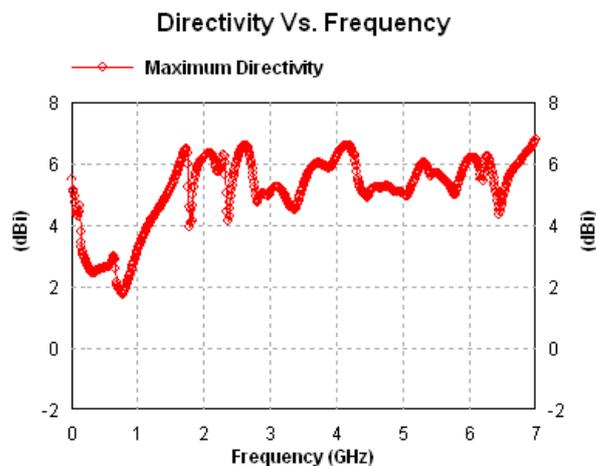


Fig 1.5 Directivity Vs Frequency

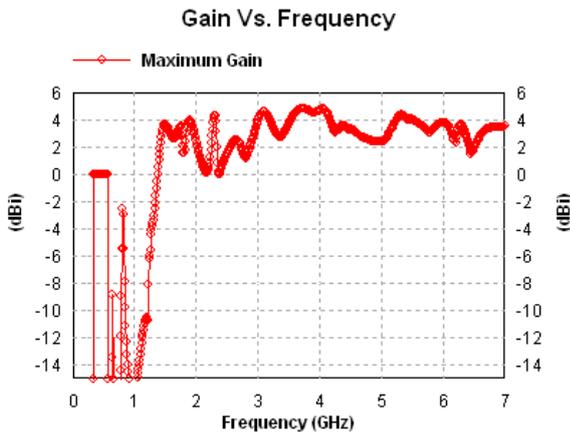


Fig 1.6 Gain Vs Frequency

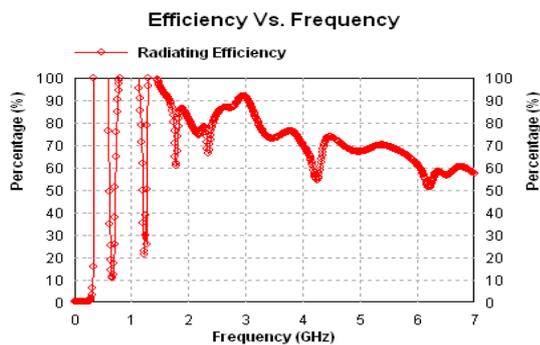


Fig 1.7 Radiating efficiency Vs Frequency

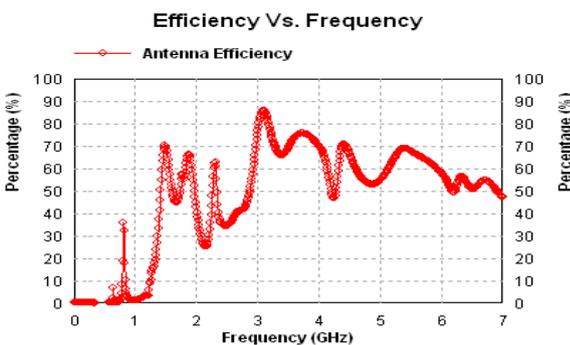


Fig 1.8 Aperture efficiency Vs Frequency

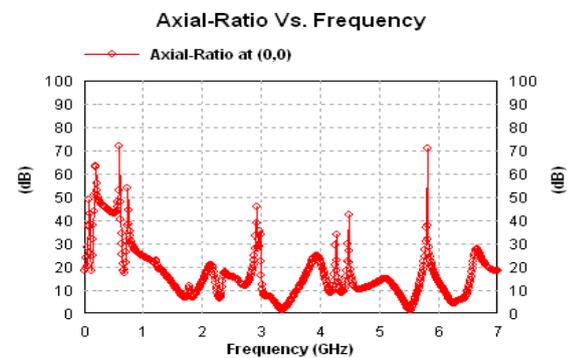


Fig 1.9 Axial Ratio Vs Frequency

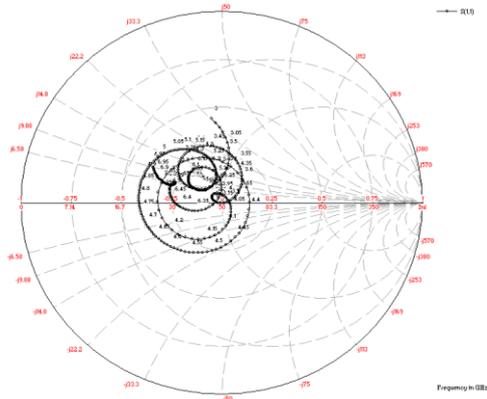


Fig 1.10 Smith chart

#### IV. CONCLUSION

A coaxially fed U – slot loaded broadband rectangular microstrip antenna is studied, designed and simulated and compared with a conventional rectangular microstrip antenna without any geometry on ground plane. This configuration provides the dual impedance bandwidth of 40 % with peak directivity 6.59 dBi, gain 4.78 dBi, axial ratio 42.46 dB, aperture efficiency 85.7 %, radiation efficiency 89 % for a band (3.05 GHz to 4.58GHz) and 29 % at centre frequency 5995 MHz with peak directivity 6.22 dBi, gain 4.32 dBi, axial ratio 70.9 dB, aperture efficiency 68.8 %, radiation efficiency 70 % for a band (5.12 GHz to 6.87 GHz ) which is suitable for S band and lower frequencies of C band applications.

#### V. ACKNOWLEDGMENT

The author would like to thank Prof. (Dr.) P.K.Singhal, Deptt.of Electronics, M.I.T.S., Gwalior (MP) for his valuable guidance and also to provide the lab facility in his department.

#### REFERENCES

- [1]. Balanis C. A., "Antenna Theory: A Review," Proc. IEEE, Vol. 80, No. 1, pp. 7–23, January 1992.
- [2]. Bahl I. J. and P. Bhartia, Microstrip Antennas, Artech House, Norwood, MA, 1980.
- [3]. Collin R. E., Antennas and Radio wave Propagation, McGraw-Hill, New York, 1985.
- [4]. Huynh T. and K. F. Lee, "Single-layer single-patch wideband microstrip antenna," Electron. Lett. 31, 1310–1311, Aug. 3, 1995.
- [5]. James J. R. and P. S. Hall (Eds.), Handbook of Microstrip Antennas, Vols. I and II, Peter Peregrinus, 1989.
- [6]. Jordan E. and K. Balmain, Electromagnetic Waves and Radiating Systems, Prentice-Hall, New York, 1968.
- [7]. Kraus J. D., Antennas, McGraw-Hill, New York, 1988.
- [8]. Kumar G. and K. P. Ray, Broadband Microstrip Antennas, Artech House, 2002.
- [9]. Ooi B. L. and Q. Shen, "A novel E-shaped broadband microstrip patch antenna," Microwave Opt. Technol. Lett. 27, 348–252, Dec. 5, 2000.
- [10]. Sarkar, S., Majumdar, A. D., Mondal, S., Biswas, S., Sarkar, D. Sarkar, P. P., "Miniaturization of rectangular microstrip patch antenna using optimized single-slotted ground plane". Microwave and Optical Technology Letters, 53, 2011: pp.111–115.
- [11]. Wong K.L., C.L. Tang, and J.Y. Chiou, "Broad-Band Probe-Fed Patch Antenna With a W-Shaped Ground Plane", IEEE Transactions On Antennas And Propagation, Vol. 50, No. 6, June 2002.



## U - Slot Loaded Broadband Rectangular Microstrip Antenna

- [12]. Wong K.L and J.Y. Sze , “Slotted rectangular microstrip antenna for bandwidth enhancement,” IEEE Trans. Antennas Propag., Vol. 48, No. 8, pp.1148-1152, August, 2000.
- [13]. Wong K. L. and J. S. Kuo, “A compact microstrip antenna with meandering slots in the ground plane,” Microwave Opt. Technol. Lett. 29, 95–97, April 20, 2001.
- [14]. Wong K. L. and T. W. Chiou, “Designs of compact microstrip antennas with a slotted ground plane,” IEEE Antennas Propagat. Soc. Int. Symp. Dig. pp. 732–735, 2001.
- [15]. Wong K. L. and W. H. Hsu, “Broadband triangular microstrip antenna with U-shaped slot,” Electron. Lett. 33, 2085–2087, Dec. 4, 1997.
- [16]. Wong K. L. and W. H. Hsu, “A broadband rectangular patch antenna with a pair of wide slits,” IEEE Trans. Antennas Propagat. 49, 1345– 1347, Sept. 2001.
- [17]. Wong Kin-Lu-, Compact and Broadband Microstrip Antenas, John Wiley & Sons,INC.

**Rajesh Kumar Verma** received his B.Tech. from IPST,Satna(MP) and M.Tech. from MITS,Gwalior(MP) in Electronics & Comm. Engg. in 1998 and 2005,respectively and doing Ph.D. from Shri JITU,Jhunjhunu(Raj.). At present, the author is working as Lecturer and Head in the deptt. of E & C Engg.,IET,Bundelkhand University,Jhansi(UP).

**Prof. P.K. Singhal** received his B.E. and Ph.D. Degrees in Electronics Engineering from Jiwaji University, Gwalior (MP)- India, in 1987 and 1997, respectively, and the M.Tech degree in Microwave Electronics from the University of Delhi, India in 1989. Currently, he is working as Professor, in the department of Electronics Engineering, Madhav Institute of Technology and Science, Gwalior (MP)- India. He has about more than 100 publications to his credit at the national and International level. His research interest includes electromagnetic, antennas, microwave circuits & communication systems.