

Design of C-Band Square Microstrip Patch Antenna with Dual Feed for Radar Applications Using ADS

V.Harsha Ram Keerthi, N.Sri pravallika, P.Srinivasulu

Abstract—In the recent years the development in communication systems requires the development of low cost, minimal weight and low profile antennas that are capable of maintaining high performance over a wide spectrum of frequencies. This technological trend has focused much effort into the design of a microstrip patch antenna. The objective of this paper is to design a microstrip line fed rectangular microstrip patch antenna which operates in C-band at 5GHz. ADS supports every step of the design process—schematic capture, layout, frequency-domain and time-domain circuit simulation, and electromagnetic field simulation, allowing the engineer to fully characterize and optimize an RF design without changing tools. Therefore, method of moments based ADS software is used to design a Microstrip Patch Antenna with enhanced gain and bandwidth. Advanced Design System (ADS) continues to lead the RF EDA industry with the most innovative and commercially successful technologies, including Harmonic Balance, Circuit Envelope, Transient Convolution, Agilent Ptolemy, X-parameter*, Momentum and 3D EM simulators (including both FEM and FDTD solvers). With ADS's Wireless Libraries and circuit-system-EM co-simulation technology, ADS provides full, standards-based design and verification within a single, integrated platform. The length of the antenna is nearly half wavelength in the dielectric it is a very critical parameter, which governs the resonant frequency of the antenna. In view of design, selection of the patch width and length are the major parameters along with the feed line dimensions. Desired patch antenna design was simulated by ADS simulator program. The entire project is being carried out at National Atmospheric Research Laboratory (NARL), ISRO.

Key words: C-Band, ADS, Micro strip Patch, RADAR, Wind profiler, dual feed, NARL

I. INTRODUCTION

In this paper the increment in Bandwidth and Gain of Rectangular Microstrip Patch antenna which operates at 5GHz has been discussed in details. Microstrip patch antenna has been received tremendous attention since the last two decades and now it becomes a major component in the development of Wind Profile Radar. Microstrip antenna is a printed type antenna consisting of a dielectric substrate sandwiched in between a ground plane and a patch.

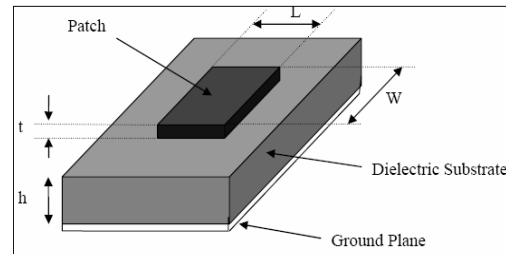


Fig1: A Typical Microstrip Patch Antenna


In this project Micro strip patch antenna technology is used for designing of the antenna suitable for WPR because of its commercial reality with applications in wide variety of microwave systems, Personnel communication system(PCS), wireless local area network (WLAN) etc. These are preferred over other types of radiators because of its low profile and light weight but its major drawback is its narrow bandwidth and low gain. This is one of the problems that researchers around the world have been trying to overcome. In this project, we have tried to increase the gain and bandwidth of the patch antenna. It has been noticed that there is some significant increments in bandwidth and gain measurements.

II. FUNDAMENTAL SPECIFICATIONS OF PATCH ANTENNAS

A micro strip or patch antenna is a low profile antenna that has a number of advantages over other antennas it is light weight, inexpensive, and easy to integrate with accompanying electronics. While the antenna can be 3D in structure (wrapped around an object, for example), the elements are usually flat hence their other name, planar antennas.

1. Impedance Matching

Looking at the current (magnetic field) and voltage (electrical field) variation along the patch, the current is maximal at the center and minimal near the left and right edges, while the electrical field is zero in the center and maximal near the left and minimal near the right edges. The figures below clarify these quantities.

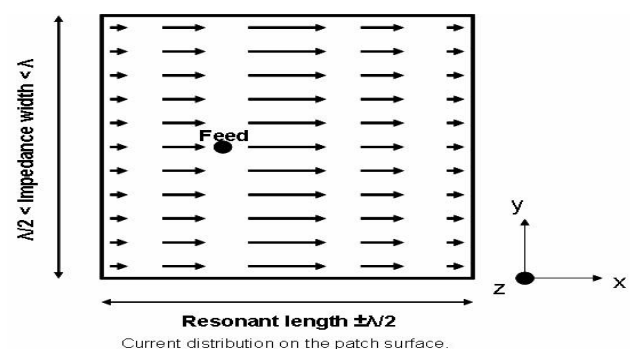


Manuscript received on April, 2013.

V.Harsha Ram Keerthi, (M.Tech, Communication and Radar systems, ECE, K.L. University, India)

N.Sri pravallika, (M.Tech, Digital Electronics and Communication Systems, Sree Vidyanikethan Engineering College, India)


Dr.P.Srinivasulu, (Scientist-SF, National Atmospheric Research Laboratory, Gadanki, India)

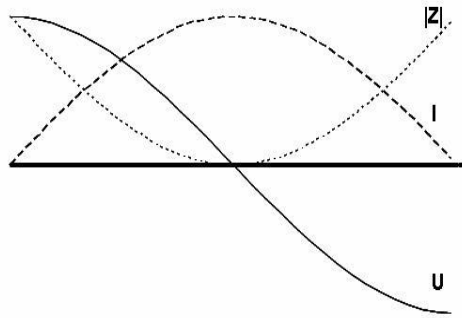

Voltage (U), current (I) and impedance (|Z|) distribution along the patch's resonant length

2. Radiation Pattern

The patch's radiation at the fringing fields results in a certain far field radiation pattern. This radiation pattern shows that the antenna radiates more power in a certain direction than another direction. The antenna is said to have certain directivity. This is commonly expressed in dB. The rectangular patch excited in its fundamental mode has a maximum directivity in the direction perpendicular to the patch (broadside). The directivity decreases when moving away from broadside towards lower elevations. The 3 dB beam width (or angular width) is twice the angle with respect to the angle of the maximum directivity, where this directivity has rolled off 3 dB with respect to the maximum directivity.

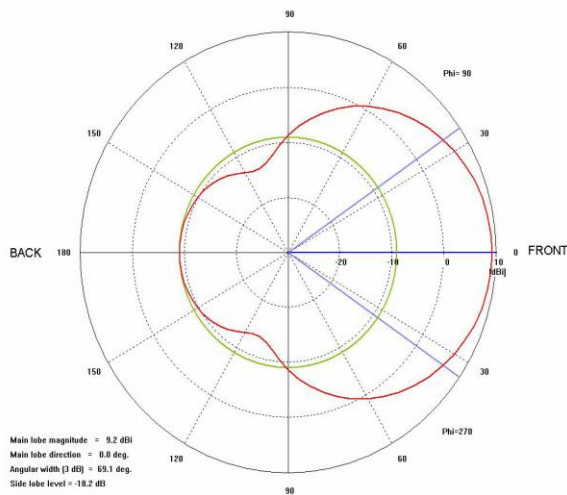


3 Antenna Gain

Antenna gain is defined as antenna directivity times a factor representing the radiation efficiency. This efficiency is defined as the ratio of the radiated power (P_r) to the input power (P_i). The input power is transformed into radiated power and surface wave power while a small portion is dissipated due to conductor and dielectric losses of the materials used. Surface waves are guided waves captured within the substrate and partially radiated and reflected back at the substrate edges. Surface waves are more easily excited when materials with higher dielectric constants and/or thicker materials are used. Surface waves are not excited when air dielectric is used. Antenna gain can also be specified using the total efficiency instead of the radiation efficiency only. This total efficiency is a combination of the radiation efficiency and efficiency linked to the impedance matching of the antenna.


4 Impedance bandwidth/return loss bandwidth

This is the frequency range wherein the structure has a usable bandwidth compared to certain impedance, usually

50Ω . The impedance bandwidth depends on a large number of parameters related to the patch antenna element itself (e.g., quality factor) and the type of feed used. The plot below shows the return loss of a patch antenna and indicates the return loss bandwidth at the desired ($S_{11}/VSWR$). The bandwidth is typically limited to a few percent. This is the major disadvantage of basic patch antennas.

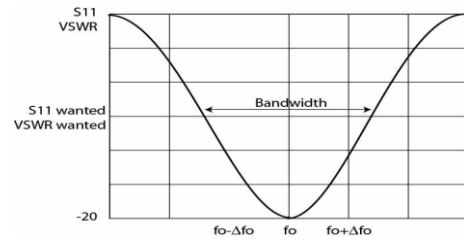

Another approach is to see the patch as a parallel RLC resonant circuit. This means a phase shift that changes versus frequency is present, as shown in the following plot:

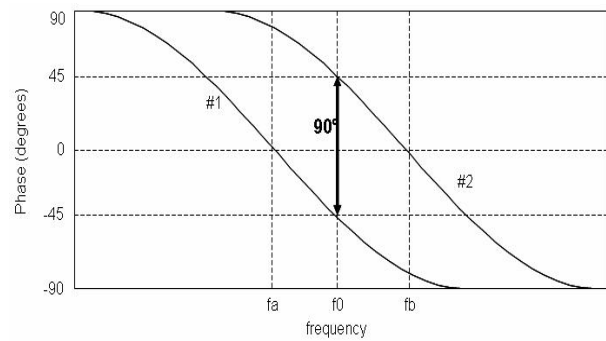

III. OPERATION OF WIND PROFILER

Wind profilers depend upon the scattering of electromagnetic energy by minor irregularities in the refractive index of air. The reflective index is a measure of the speed at which electromagnetic wave propagates through a medium. Atmosphere is the medium for wind profiling. A spatial variation in this index encountered by a radio wave causes a minute amount of energy to be scattered in all direction. In this atmosphere, minor irregularities in the refractive index exist over a wide range of sizes in the troposphere and stratosphere. The refractive index depends primarily on the temperature, pressure and humidity of the air. The radar depends on the scattering of EM wave energy of the air associated with clear air turbulence (CAT). The atmosphere minor irregularities in the index refraction exist over a wide range of refraction sizes.

The wind, as it varies in direction or speed produce turbulent eddies (small whirling currents of air). The turbulent eddies are created over a spectrum of sizes ranging from many tens of metres down to centimetres.



Wind profiler radars are vertically directed pulsed Doppler radars capable of analysing the back-scattered signals to determine the velocity of air along the beams. By steering the beams typically 15° from zenith, the horizontal and vertical components of the air motion can be obtained.

Radar systems for weather forecasting purposes are to be accommodated in the frequency allocations of the radiolocation service and/or the meteorological aids service. Existing uses in these bands need to be protected and compatibility with the services in the adjacent bands has to be assured. On the other hand, accommodation in the frequency bands of other radio services could be considered, if this is acceptable from a frequency-sharing point of view. For the identification of the various compatibility and/or sharing options, a clear understanding of the concept of wind profiler radar systems and their behaviour in the electromagnetic environment is needed.

The important applications of a conventional Wind Profile Radar lies in (i) Short range forecasting, (ii) Convective storm initiation, (iii) Climates, (iv) Air Pollution, (v) Aviation operations and flight planning, and (vi) Rocket and missile launching etc.

IV. OVERVIEW OF ADS SOFTWARE

ADS(Advance Design Systems), 3-D planar EM simulation software for electronics and antenna analysis, a partial differential equation solver of Maxwell's equations based on the method of moments. It is a 3-D planar electromagnetic (EM) simulator used for passive analysis. It is a full wave, method of moments (MOM) based electromagnetic simulator for analyzing and optimizing planar and 3D structures in a multi-layer dielectric environment. It solves Maxwell's equation in integral form and its solutions include the wave effects, discontinuity effects, coupling effects and radiation effects. The simulated result includes S,Y, and Z-parameters, VSWR, RLC equivalent circuits, current field distribution, near and far field estimation, radiation pattern etc.

1. The important features of ADS Software:

- (a) ADS is EM Design Kit for real-time full-wave EM tuning, optimization and synthesis.
- (b) Multi-fold speed improvement and multi-CPU support for much improved efficiency.
- (c) Equation-based schematic-layout editor with Boolean operations for easy and flexible geometry editing and parameterization.
- (d) Lumped element equivalent circuit automatic extraction and optimization for convenient circuit designs.
- (e) Improved integration into Microwave Office from Applied Wave Research.

2. Applications of ADS:

- (a) MMIC Design.
- (b) Signal Integrity Analysis.
- (c) RFIC Design.
- (d) RF & Microwave Board Design.
- (e) RF System-in-Package & RF Module Design.
- (g) Many other low to high frequency structures.

3. Applications of ADS in Antennas:

- (a) Planar antennas such as micro strip antennas and slot antennas.

- (b) Wire antennas such as various types of dipole, monopole, helix and quadrifilar antennas.
- (c) Small antennas such as inverted-F antennas and its derivations.
- (d) Dielectric resonator antennas.
- (e) RFID antennas.
- (f) Optical frequency antennas.
- (g) Many other types of antennas.

V. DESIGN OF A SQUARE PATCH ANTENNA

In this paper, selected parameters are: Resonant Frequency = 5 GHz(C band), Dielectric material is RT-DUROID5880, Dielectric constant $\epsilon_r = 2.2$, Height of the dielectric substrate $h = 1.575$ mm. The dimension of the Square Patch is 0.0001 mm layout resolution, $\tan \delta = 0.0004$

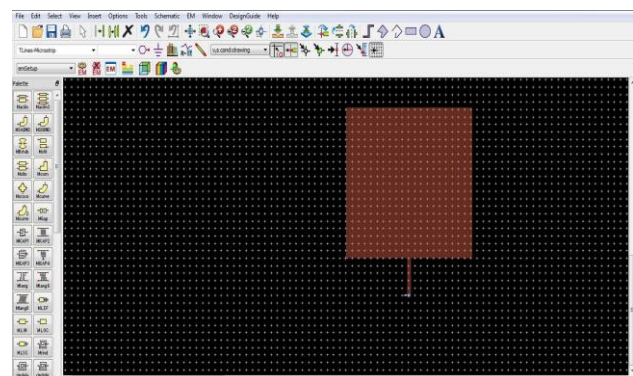


Fig.2: Patch Layout structure.

Meshing parameters are Fmax = 6 GHz, N cells = 20 cells/λ, mesh reduction is normal.

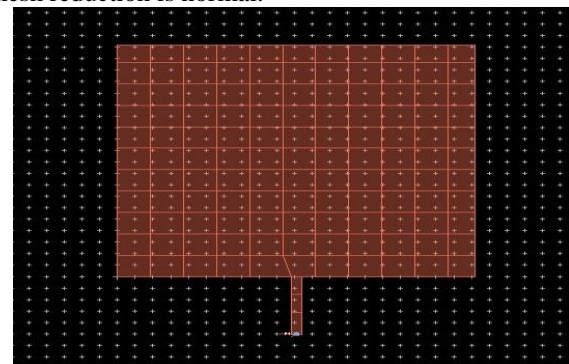


Fig.3: Meshed structure

VI. SIMULATED RESULT FOR DIFFERENT PARAMETERS

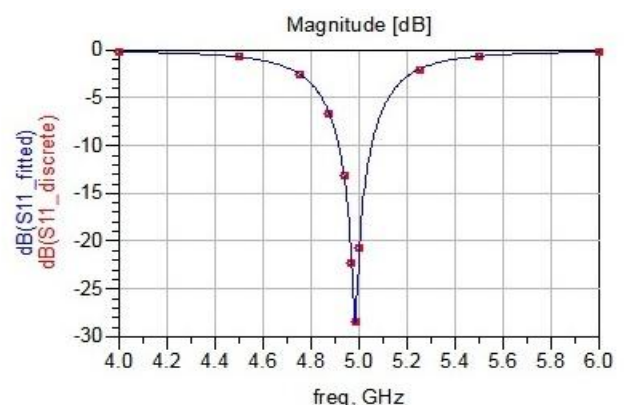


Fig. 4: Return Loss vs frequency plot

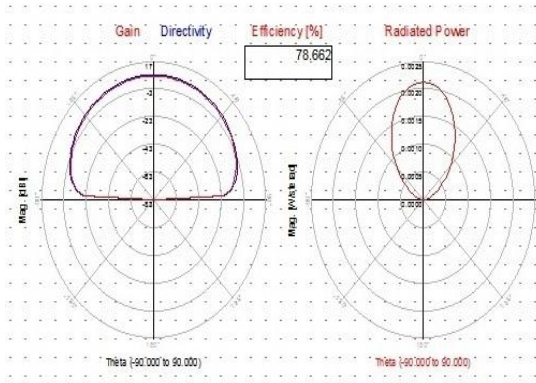


Fig. 5: Gain & Directivity plot

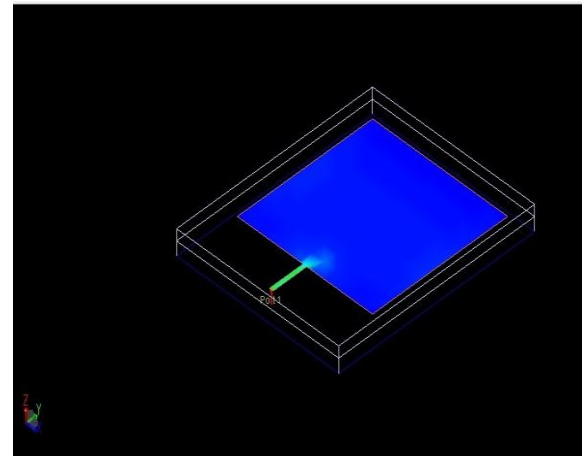


Fig. 9: Average current distribution with colour for the average strength of the current

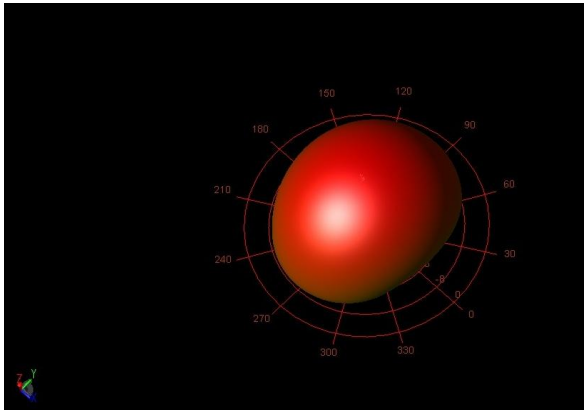


Fig. 6: 3D Radiation Pattern of Patch Antenna

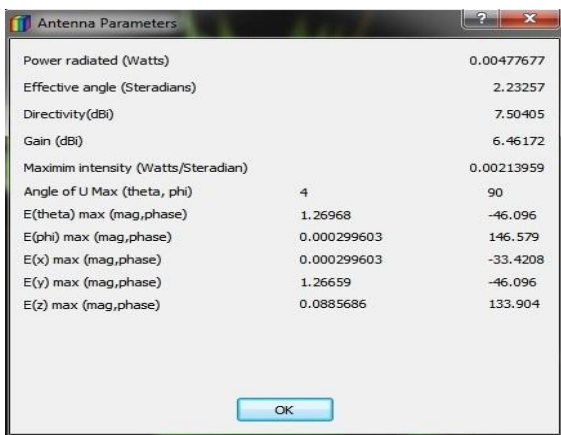


Fig. 7: Antenna Parameters

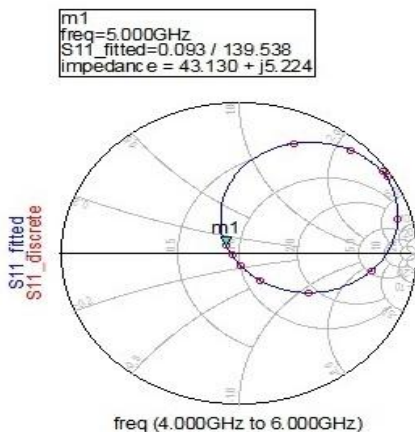


Fig.8 input impedance of patch antenna

VII. ADVANTAGE OF WIDE BANDWIDTH FOR WIND PROFILER APPLICATIONS

A major problem with any radar – and a wind profiler radar is no exception – is the large required bandwidth. Under the condition that the separation areas between television stations operating in the same channel are large enough to allow the operation of a wind profiler in this channel and in this separation region, the bandwidth issue is no longer a major concern because the profiler could occupy practically the entire width of the TV channel.

- The data rate will be high and therefore the range resolution is high.
- The pulse compression will be smaller with the increment of frequency bandwidth.
- In mobile and broadband communications, it will be very useful.
- Radiolocation, amateur, space operations, amateur-satellite and aeronautical radiolocation services.

VIII. CONCLUSION

The research motivation of this project is to design square patch antenna for atmospheric Wind Profile Radar application which operates in C-band at 5 GHz. ADS electromagnetic simulator is used for design and simulation of patch Antenna. The square patch antenna with 50ohms line feed has been designed. The impedance bandwidth of the designed antenna is 420 MHz, antenna gain is 6.43 dB, directivity is 7.50, return loss -29dB, the radiation Efficiency at 5 GHz is about 95% and antenna efficiency is about 79 %. From the radiation pattern, it is observed that use of amplitude taper maintained the SLL within the maximum scan angle limit, which is an added advantage for Atmospheric Wind Profile Radar application. The gain and bandwidth of single element patch shows the path of further experiments with arrays of antennas and in the case of dual polarization.

ACKNOWLEDGMENT

The authors of this paper would like to acknowledge all the corresponding IEEE paper holders and most importantly the publishers of related books and journals which gave immense support and inspiration in preparing this manuscript. Above all, the extreme mental support and source of inspiration from all the family members and friends are widely acknowledged.

REFERENCES

- [1] Srinivasulu. P, Manas R Padhy, Yasodha. P and NarayanaRao. T, 2010 “Development of UHF wind profiling radar for lower atmospheric research applications”. Conference paper at NARL.
- [2] Srinivasulu. P, Yasodha. P, Rajendra Prasad. T and Narayana Reddy. S 2010 “Development of 1280 MHz Active Array RADAR at NARL”. Conference Paper at NARL DRAWS-2010.
- [3] C.T.P.Song, P.S.Hall and H.G.Shiraz, “Multiband Multiple Ring Monopole Antennas” IEEE Trans. on Antennas and propagation, vol. 51, No.4 pp. 722–729, April. 2003.
- [4]. Karaboga, D., K. Guney, S. Sagiroglu, and M. Erler, “Neural computation of resonant frequency of electrically thin and thick rectangular microstrip antennas,” IEEE Proceedings | Microwaves, Antennas and Propagation, Vol. 146, No. 2, 155{159, Apr. 1999.
- [5]. Mishra, R. K. and A. Patnaik, “Neural network-based CAD model for the design of square-patch antennas,” IEEE Trans. on Antennas Propagat., Vol. 46, No. 12, 1890{1891, Dec. 1998.
- [6]. Patnaik, A., R. K. Mishra, G. K. Patra, and S. K. Dash, “An artificial neural network model for effective dielectric constant of microstrip line,” IEEE Trans. on Antennas Propagat., Vol. 45, No. 11, 1697, Nov. 1997.
- [7] R. G. Voughan. 1988. Two-port higher mode circular microstrip antennas. IEEE, Trans. Antennas Propagat.36(3): 309-321.
- [8] D.D.Sandu, O.Avadanei, A.Ioachima, G.Banciu, P.Gasner. Microstrip Patch Antenna with dielectric substrate. Journal Optoelectronics and Advanced Materials Vol. 5, No. 5, 2003.



V. HARSHA RAM KEERTHI born in India, 1990, he is currently pursuing M.Tech in Communications & Radar System Engineering from the Department of Electronics and Communication, K.L University, Vijayawada, A.P, India. Presently he is carrying out his project work on Microstrip Patch Antenna Design from National Atmospheric Research Laboratory (NARL), Gadanki. Department of Space, Govt.of India. He has completed his B.E in Electronics and Communication from

Saveetha Engineering College of Electronics, Anna University, Tamilnadu, and India.



N. SRI PRAVALLIKA born in India, 1988, she is currently pursuing M.Tech in Digital Electronics and communication system from the Department of Electronics and Communication, Sree vidyanikethan Engineering College, Tirupathi, A.P, India. Presently she is carrying out his project work on Microstrip Patch Antenna Design from National Atmospheric Research Laboratory (NARL), Gadanki. Department of Space, Govt.of India. She has completed her B.Tech in Electronics and Communication from

Chadalawada Ramanamma Engineering College, JNTU Ananthapur, Andhra Pradesh, and India.



Dr. P. SRINIVASULU is presently working as Scientist-SF at National Atmospheric Research Laboratory (NARL). He is involved in the installation and commissioning of the VHF Indian MST Radar and L-band Boundary Layer Radar at NARL. He has expertise on high power radar transmitters, phased antenna arrays and receivers. Currently he is working on ~~leading~~ active array radar projects in VHF and UHF bands for atmospheric

remote sensing application.