

Design of Two Level DWT Architecture for Multimedia Applications

G. Nagarjuna Reddy, Mahendra Vucha

Abstract— Images are to be transmitted without loss of information. That can be achieved by transforming using Discrete Wavelet Transform (DWT). The discrete wavelet transform (DWT) is being increasingly used for image coding. This is due to the fact that DWT supports features like progressive image transmission (by quality, by resolution), ease of transformed image manipulation, region of interest coding, etc. Hence, there is a need of design efficient & fast architecture for DWT. This paper is introducing an efficient architecture to enhance speed of DWT Computation. The Discrete Wavelet Transform (DWT) is based on time-scale representation, which provides efficient multi-resolution. The introduced architecture increases levels of DWT architecture to achieve lower computational complexity and reduced memory. As the DWT traditionally been implemented by convolution which demands both a large number of computations and a large storage features that are not desirable for either high-speed or low-power applications. This paper describes Lossless 2-D DWT (Discrete Wavelet Transform) using Lifting Scheme Architecture to reduce computational overheads. The behavior of designed DWT architecture is modeled using the Verilog HDL and functionality could be verified using the Modelsim simulation tool.

Index Terms—Discrete wavelet transform, very-large-scale integration (VLSI), folded architecture, single-input/single-output

I. INTRODUCTION

The discrete wavelet transform (DWT) has been widely used for image coding. The existing architectures for implementing the DWT are mainly classified into two categories: 1) convolution based and 2) lifting based [2]–[3]. Since the lifting-based architectures have advantages over the convolution-based ones in computation complexity and memory requirement, more attention is paid on the lifting based ones. The Jou *et al.* proposed architecture for directly implementing the lifting scheme. Based on this direct architecture, Lian *et al.* proposed a folded architecture to increase the hardware utilization. Unfortunately, these architectures have limitations on the critical path latency and memory requirement. The flipping structure can reduce the critical path latency by eliminating the multipliers on the path from the input node to the computation node without hardware overhead. To construct an efficient single input/single output (SISO) VLSI architecture based on lifting scheme, which meets the high processing speed requirement with controlled increase of hardware cost and simple control signals.

Manuscript published on 30 April 2013.

* Correspondence Author (s)

G.Nagarjuna Reddy, (Department of Electronics & Communication Engineering, KL University, Vijayawada

MahendraVucha, (Department of Electronics & Communication Engineering, KL University, Vijayawada

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

High processing speed can be achieved when multiple row data samples are processed simultaneously. And time multiplexing technique is adopted to control the increase of the hardware cost.

Furthermore, the control signals are simple, since the regular architecture is a combination of simple single-input/single-output (SISO) modules and two-input/two-output (TITO) modules. It provides a variety of hardware implementations to meet different processing speed requirements the rapid progress of VLSI design technologies, many processors based on audio and image signal processing have been developed recently. The two-dimensional discrete wavelet transform (2-D DWT) plays a major role in the JPEG-2000 images compression standard. Presently, research on the DWT is attracting a great deal of attention. In addition to audio and image compression the DWT has important applications in many areas, such as computer graphics, numerical analysis, radar target distinguishing and so forth. The architecture of the 2-D DWT is mainly composed of the multirate filters.

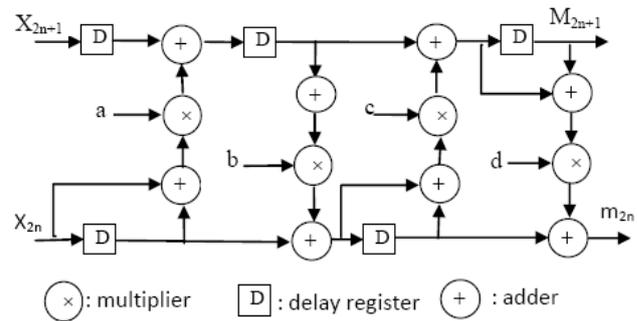


Fig.1.Two-input/two-output lifting architecture of the CDF97.

Because extensive computation is involved in the practical applications, e.g., digital cameras, high efficiency and low-cost hardware is indispensable. At present, many VLSI architectures for the 2-D DWT have been proposed to meet the requirements of real-time processing. However, because the filtering operations are required in both the horizontal and vertical directions, designing a highly efficient architecture at a low cost is difficult. Lewis and Knowles used the four-tap Daubechies filter to design a 2-D DWT architecture. Parhi and Nishitani proposed two architectures that combine the word-parallel and digital-serial methodologies. Chakrabarti and Vishwanath presented the non-separable architecture and the SIMD array architecture. Vishwanath *et al.* employed two systolic array filters and two parallel filters to implement the 2-D DWT.

The modified version uses four parallel filters as reported in and . Chuang and Chen proposed a parallel pipelined VLSI array architecture for the 2-D DWT. Chen and Bayoumi [18] presented scalable systolic array architecture. Other 2-D DWT architectures have been reported Among the various architectures, the best-known design for the 2-D DWT is the parallel filter architecture .The design of the parallel filter architecture is based on the modified recursive pyramid algorithm (MRPA), which intersperses the computation of the second and following levels among the computation of the first level. The MRPA is feasible for the 1-DDWT architecture, but is not suitable for the 2-D DWT, because the hardware utilization is inefficient and a complicated control circuit results from the interleaving data flow. Therefore, in this paper, we propose a new VLSI architecture for the separable 2-D DWT. The advantages of the proposed architecture are the 100% hardware utilization, fast computing time, regular dataflow, and low control complexity. Additionally, because of the regular structure, the proposed architecture can easily be scaled with the filter length and the 2-D DWT level.

II. LINE-BASED 2-D WAVELET TRANSFORM

Image data is usually acquired in a serial manner. For example, a very common way to acquire image data is to scan an image one line at a time. Throughout this paper, we will assume our system operates with this line-by-line acquisition. Given this, our objective in this section will be to design a 2-DWT that requires *storing a minimum total number of lines*. The assumption is that images are stored in memory only while they are used to generate output coefficients, and they are released from memory when no longer needed. Obviously, performing a 1-D WT on a single line can be done without significant memory. However, in order to implement the separable 2-D transform the next step is to perform column filtering and here memory utilization can become a concern. For example, a completely separable implementation would require thus memory sizes of the order of the image size will be required.

III. LIFTING SCHEME OF DWT

Lifting scheme is a relatively new method to construct wavelet bases, which was first introduced by Sweldens in 1990s [4]. This scheme is called the second-generation wavelet, which leads to a fast in-place implementation of the DWT. According to [4], any DWT of perfect reconstruction can be decomposed into a finite sequence of lifting steps. This decomposition corresponds to a factorization for the poly-phase matrix of the target wavelet filter into a sequence of alternating upper and lower triangular matrices and a constant diagonal matrix, which can be expressed as follows

$$\begin{aligned} h(z) &= h_e(z^2) + z^{-1}h_o(z^2) \\ g(z) &= g_e(z^2) + z^{-1}g_o(z^2) \\ p(z) &= \begin{bmatrix} h_e(z) & g_e(z) \\ h_o(z) & g_o(z) \end{bmatrix} \\ &= \prod_{i=1}^m \begin{bmatrix} 1 & si(z) \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ ti(z) & 1 \end{bmatrix} \begin{bmatrix} K_0 & 0 \\ 0 & K_1 \end{bmatrix} \end{aligned}$$

Where $h(z)$ and $g(z)$ are the low-pass and high-pass analysis filters, respectively. Equation (1) is the poly-phase decomposition and $P(z)$ is the poly-phase matrix. For example, the (9, 7) filter (CDF97) adopted in JPEG2000 can be decomposed into four lifting stages as follows

$$P(z) = \begin{bmatrix} 1 & a(1+z^{-1}) \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ b(1+z) & 1 \end{bmatrix} \begin{bmatrix} 1 & c(1+z^{-1}) \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ d(1+z) & 1 \end{bmatrix} \begin{bmatrix} K_0 & 0 \\ 0 & K_1 \end{bmatrix}$$

Where $a, b, c,$ and d are the lifting coefficients, and K_0, K_1 are the scale normalization coefficients. The scale normalization coefficients can be implemented together with the quantization, if image compression is performed [7]. Thus, we focus on the implementation of the lifting stages in this brief paper. The odd (even) indexed data samples are represented by x_{2n+1} (x_{2n}). The intermediate values computed during lifting steps are denoted as m_{2n+1}^k and m_{2n}^k ($k = 0, 1, 2, 3$), and the high- and low-frequency coefficients are expressed as the sequence m_{2n+1} and m_{2n} , respectively. With these mathematical notations, the implementation of the CDF97 can be rewritten as follows:

$$\begin{aligned} m_{2n+1}^0 &= x_{2n+1} \\ m_{2n}^0 &= x_{2n} \\ m_{2n+1}^1 &= m_{2n+1}^0 + a(m_{2n}^0 + m_{2n+2}^0) \\ m_{2n}^1 &= m_{2n}^0 \\ m_{2n+1}^2 &= m_{2n+1}^1 \\ m_{2n}^2 &= m_{2n}^1 + b(m_{2n-1}^1 + m_{2n+1}^1) \\ m_{2n+1}^3 &= m_{2n+1}^2 + c(m_{2n}^2 + m_{2n+2}^2) \\ m_{2n}^3 &= m_{2n}^2 \\ m_{2n+1} &= m_{2n+1}^3 \\ m_{2n} &= m_{2n}^3 + d(m_{2n-1}^3 + m_{2n+1}^3) \end{aligned}$$


Based on (3), the two-input/two-output lifting architecture of the CDF97 is shown in Fig. 1.


3.1 Architecture for the Horizontal Filtering along the Rows ($M = 8$)

First, CDF97 is applied to the row dimension, which is a 2D DWT. The architecture for the horizontal filtering along the rows consists of eight SISO modules, as shown in Fig. 2. The input data flow is shown in Fig. 3. The elements from each row are processed by one SISO module. We can accordingly get output data flow of the architecture for the horizontal filtering, as shown in Fig. 4, where $m_{i,j}$ denotes the computation results after we apply CDF97 to the row dimension.

Many SISO architectures for the 2D DWT are proposed. An efficient SISO architecture is proposed in by employing the fold technique. Therefore, we adopt it in our SISO modules, which consists of two multipliers, four adders, and ten registers.



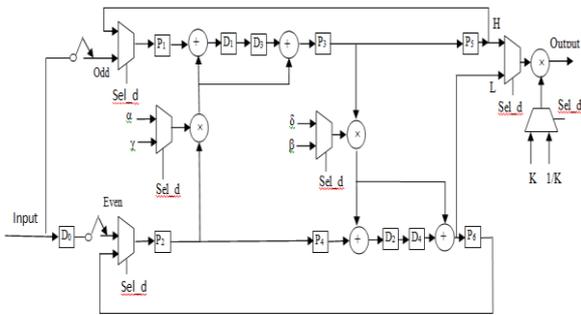

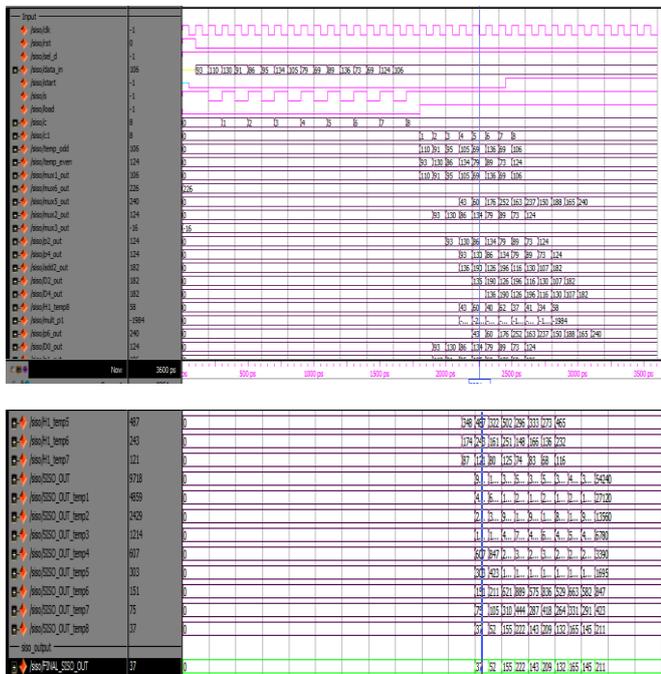


Tito Results:

This section discusses about the functional verification of the system. The table 2 describes the inputs & outputs of TITO respectively

Table2.Inputs to TITO

INPUT DATA	OUTPUT DATA
TITO Inputs = 37 52	TITO Outputs = 118 -56
155 222 143 209 132	-146 -107 -68 -56 -55 52
165 145 211	259 251 162 152 189 213
	219 220

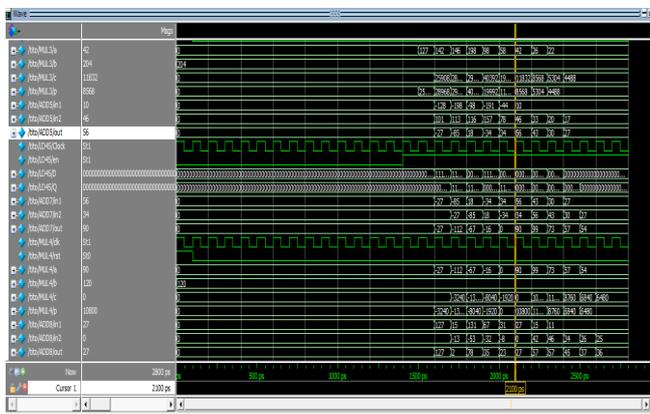

V. CONCLUSION

In this brief, we have proposed a novel EFA for the lifting based DWT. We have given a new formula for the conventional lifting algorithm. Then, by employing the of SISO techniques, the conventional data flow of the lifting-based DWT is converted to a parallel one, resulting in the OA with repeatable property. Based on this property, the proposed EFA is derived from the OA by further employing the fold technique.

The FPGA implementation results show that the proposed EFA possesses short critical path latency and achieves high hardware utilization. Performance comparisons indicate that our EFA provides an efficient alternative in trade-off among the critical path latency, hardware cost, and control complexity.

REFERENCES

- [1]. C. Christopoulos, A. Skodras, and T. Ebrahimi, "TheJPEG2000 Still Image Coding System: An Overview"IEEE Trans. Consumer Electronics, vol. 46,no. 4, pp.1103-1127, Nov. 2000.
- [2]. C. Chrysafis and A. Ortega, "Line-Based, Reduced Memory, Wavelet Image Compression," IEEE Trans. Image Processing., vol. 9, no. 3, pp. 378-389, Mar.2000.
- [3]. P. Wu and L. Chen, "An Efficient Architecture for Two-Dimensional Discrete Wavelet Transform," IEEE Trans. Circuits and Systems for Video Technology, vol. 11, no. 4, pp. 536-545, Apr. 2001.
- [4]. Daubechies and W. Sweldens, "Factoring Wavelet Transforms intoLifting Steps," J. Fourier Analysis and Applications, vol. 4, no. 3, pp. 247-269,1998.
- [5]. M. Grangetto, E. Magli, M. Martina, and G. Olmo, "Optimization and Implementation of the Integer Wavelet Transform for Image Coding," IEEE Trans. Image Processing, vol. 11, no. 6, pp. 596-604, June 2002.
- [6]. H. Liao, M.K. Mandal, and B.F. Cockburn, "Efficient Architectures for 1Dand 2D Lifting-Based Wavelet Transform," IEEE Trans. Signal Processing, vol. 52, no. 5, pp. 1315-1326, May 2004.
- [7]. C.T. Huang, P.C. Tseng, and L.G. Chen, "Flipping Structure: An Efficient VLSI Architecture for Lifting Based Discrete Wavelet Transform," IEEE Trans. Signal Pr C.T. Huang, P.C. Tseng, and L.G. Chen, "Flipping Structure: An Efficient VLSI Architecture for Lifting Based Discrete Wavelet Transform," IEEE Trans. Signal Processing, vol. 52, no. 4, pp. 1080-1089, Apr. 2004.
- [8]. T. Acharya and C. Chakrabarti, "A survey on lifting-based discrete wavelet transform architectures," J. VLSI Signal Process., vol. 42, no. 3,pp. 321–339, Mar. 2006.
- [9]. C. Chakrabarti and M. Vishwanath, "Efficient realizations of discrete and continuous wavelet transforms: From single chip implementations to mapping on SIMD array computers," IEEE Trans. Signal Process., vol. 43, no. 3, pp. 759–771, Mar. 1995.
- [10]. M. Vishwanath, R.M. Owens, and M. J. Irwin, "VLSI architectures for the discrete wavelet transform,"IEEE Trans. Circuits Syst. II, Analog Digit. Signal Process, vol.42, no. 5, pp. 305–316, May 1995.
- [11]. W. Jiang and A. Ortega, "Lifting factorization-based discrete wavelet transform architecture design,"IEEE Trans. Circuits Syst. Video Technol., vol. 11, no. 5,pp. 651–657, May 2001.
- [12]. T. Acharya and C. Chakrabarti, "A survey on lifting - based discrete wavelet transform architectures," VLSI Signal Process., vol. 42, no. 3,pp. 321–339, Mar 2006.
- [13]. Mahendra Vucha and Arvind Rajawat. "Design and FPGA Implementation of Systolic Array Architecture for Matrix Multiplication." International Journal of Applications 26(3):18-22, July 2011.
- [14]. Prashant Gurjar, Rashmi Solanki, Pooja Kansliwal and Mahendra Vucha. "VLSI implementation of adders for high speed ALU," India onference (INDICON),2011 Annual IEEE , vol., no., pp.1.6, 16-18 Dec. 2011



G.Nagarjuna Reddy was born on 20th July 1988 at Vijayawada, India. He received his, B.Tech in Electronics & Communication Engineering from Lenora College of Engineering (LCE), affiliated to JNTU, Kakinada, Rampachodavaram , AP, India and Pursuing M.Tech in VLSI at K L University, Vijayawada, AP, India.His research interests in, Digital VLSI Design and Low Power VLSI Design and Digital Signal Processing.



MahendraVucha received his B. Tech in Electronics & Communication Engineering from JNTU, Hyderabad in 2007 and M. Tech degree in VLSI and Embedded System Design from MANIT, Bhopal in 2009. He is currently working for his Ph. D degree at MANIT and also working as Asst. Prof in K L University, Dept. of Electronics and Communication Engineering, Vijayawada, AP, India. His areas of interest are Hardware Software Co-Design, Analog Circuit design, Digital System Design and Embedded System Design.

