

# Low Inter Symbol Interference SDR Receiver using LMS Algorithms

Majid S. Naghmash, Md Hussein Baqir, Mousa Kadhim Wali

**Abstract**— In this paper, the low Inter Symbol Interference (ISI) Software Defined Radio (SDR) receiver using Least Mean Square (LMS) algorithms is developed and investigated. The transmission medium will distort the incoming digital signals and the aim of the (LMS) is to remove the effect of Inter Symbol Interference (ISI) in the Software Defined Radio (SDR) receivers. The resulting of this process is an important act in digital signal processing performance techniques. The development of adaptive equalizer to follow the rapid growth in modern information systems is the key of error reduction. To increase the data transmission rate, an efficient adaptive equalizer should be used in radio communication systems. In this paper, the channel selection LMS equalizer filter is developed to eliminate the ISI from the software defined radio (SDR) receiver channel. The LMS equalizer is presented and investigated according to MATLAB simulation. The proposed equalizer shows better performance than the conventional filter with AWGN distortion and inters symbol interference (ISI). The results show a promising basis for rising code, algorithms in 16-QAM modulation scheme.

**Keyword** – LMS, ISI, SDR Receiver, 16-QAM

## I. INTRODUCTION

The communication channel is mostly affected by the presentation of communication systems working in excess of the medium. The transmitted signals over a channel are distorted by both amplitude and phase functions. Additionally, the delay spread of the channel introduce the well known inter symbol interference (ISI) to the received signals which is one of the main difficulty to dependable and high speed data transmission channel equalization in this process of compensating for the unconstructive outcome in the channel on the transmitting signal and take away the ensuing ISI [1]. To attain this objective, the equalizer uses an estimate of the channel frequency response, thought the fading channel vary all through the broadcast phase. The equalizer required here to study the frequency response in an adaptive style to be talented to incessantly alleviate the unenthusiastic outcome in the channel. The obtainable equalization channels techniques like LMS with other types shows better performance [2]. Inter symbol Interference (ISI) is a form of distortion in which one symbol interferes with subsequent symbols.

**Manuscript received February, 2014.**

**Majid S. Naghmash** Received His Msc. degree in the satellite communication engineering from University of Technology Baghdad – Iraq

**Mohammed Hussein**. was born in 1956 in Iraq - Baghdad holds a Bakhlores engineering Electronic and Communications in 1976 and master's degrees in engineering electronic Technology University in 2004-2005, and I am currently a Lecturer at the College of Electrical and Electronic Technique in Baghdad, Iraq.

**Mousa Kadhim Wali** received the B.Sc. degree in Electrical Engineering from Baghdad University, Iraq

The ISI is an unwanted occurrence as the preceding symbols has alike effects as noise, hence making the communication fewer dependable. The multipath propagation is almost caused the ISI in the channel and the inherent non-linear frequency response produce successive symbols [3].

The attendance of ISI in the system introduces errors in the decision device at the receiver output. Consequently, the goal is to minimize the effects of ISI. There are two ways to fight with ISI, the error correction and the adaptive equalizer techniques. Also. ISI could be removed by using cyclic prefix before transmitting. The equalizer algorithms of LMS will used as simple techniques, low computational complexity and better performance in many running environments [4]. Thus, the system is motivated by the insist for better quality of service, high data rate and high mobility [5]. As illustrated in Figure 1, suppose  $x(n)$  is the original signal and  $m(n)$  is the combined complex baseband impulse response of the transmitter. Then the received signal at the equalizer is expressed as:

$$Y(n) = X(n).M^*(n) + N(n) \text{ ----- (1)}$$

$Y(n)$  is the input of adaptive equalizer,  $M^*(n)$  is complex conjugate of  $M(n)$  denoted as baseband noise in the receiver path and  $N(n)$  is the convolution operation impulse response of the equalizer then the output of equalizer is given by;

$$Z(n) = X(n).K(n) + N(n).H(n) \text{ ----- (2)}$$

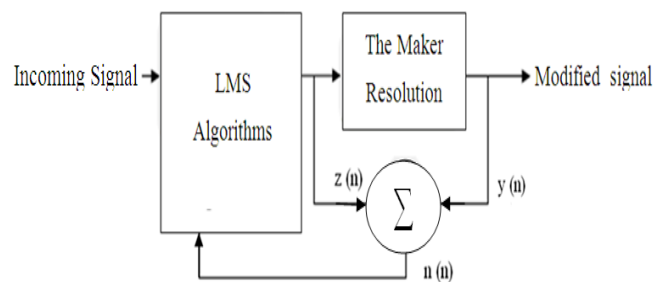


Figure 1 Adaptive equalizer Modified signal

The LMS algorithms are a type of adaptive filter used to reproduce the preferred filter by discovers the filter coefficients that relay to create the least mean squares of the error signal by mean of the different between the desired and the actual signal. The LMS algorithms include an iterative process that creates succeeding alteration to the weight vector in the direction of negative slope vector which ultimately guide to minimum fractional spaced error.

A fractional spaced algorithm is relatively simple compared with other algorithms due to not requiring of correlation function. The step size of 0.005 is better than step size of 0.001 in LMS algorithms case. However, the different



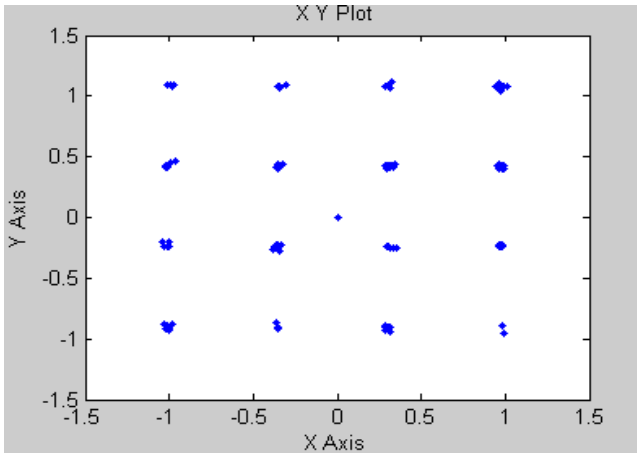


Figure 3 Constellation diagram of 16-QAM signal before IIR filter

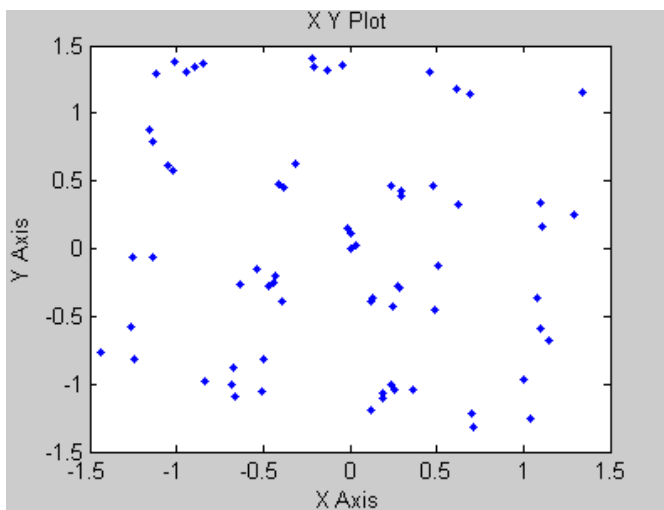


Figure 4 Constellation diagram of 16-QAM signal after IIR filter

Winning the receiver of the signal, the demodulator examine the received symbol, which may have been corrupted by the channel or the receiver noise (AWGN). As it's estimated of what was actually transmitted, that point on the constellation diagram which is closed to that of the received symbol. However, it will demodulate incorrectly if the corruption has caused the received symbol to move closer to another constellation point than the transmitted one. In this case, the equalizer will play the main role to guide the received signal and eliminate the ISI and noise from the channel.

### III.II LMS LINEAR EQUALIZER

The LMS Linear Equalizer block uses a linear equalizer and the LMS algorithm to equalize a linearly modulated baseband signal through a dispersive channel [9].

During the simulation, the block uses the LMS algorithm to update the weights, once per symbol. If the Number of samples per symbol parameter is 1, then the block implements a symbol-spaced equalizer; otherwise, the block implements a fractionally spaced equalizer.

The LMS Filter block can implement an adaptive FIR filter using five different algorithms.

The block estimates the filter weights, or coefficients, needed to minimize the error between the output signal and the desired signal.

This input signal can be a sample-based scalar or a single-channel frame-based signal. Connect the desired signal to the desired port.

The desired signal must have the same data type, frame status, complexity, and dimensions as the input signal. The Output port outputs the filtered input signal, which is the estimate of the desired signal.

The output of the Output port has the same frame status as the input signal.

The Error port outputs the result of subtracting the output signal from the desired signal. However, the desired signal is connected to the transmit signal before IIR filter.

The equalizer will compare between the transmitted symbol and the received one to correlate the correct symbol and feed to the demodulator.

This block accepts only frame-based signals. If the value of Reference tap is equal to or greater than the frame size, the block will not work properly.

The eye diagram of the received signal before the equalizer is shown in Figure 4.

If one makes a look at the received signal, the signal is affected by ISI and noise effect with SNR of less than 20 dB. When the SNR increased to 30 dB, the noise margin start to close out and the error is decreased in eye diagram. Since, the SNR decrease to 10 dB, the eye diagram has more distortion in the system.

Figure 6 shows the eye diagrams of the receiver signal when SNR = 30 dB. The eye diagram reveals less distortion given that the eye opening is more defined. The correct eye results and less bit error and hence, less transmission error [10].

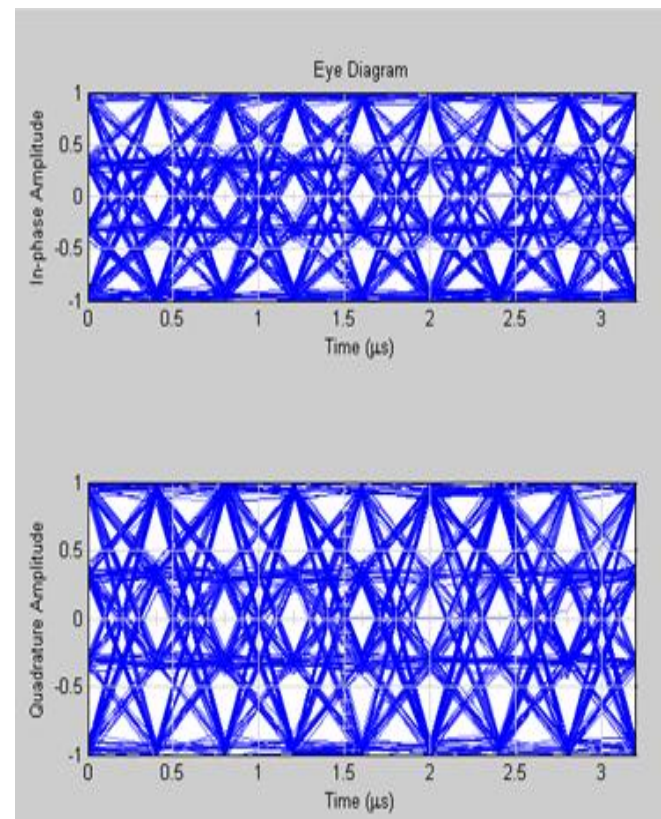


Figure 5 Eye diagram of 16QAM received signal before Equalizer

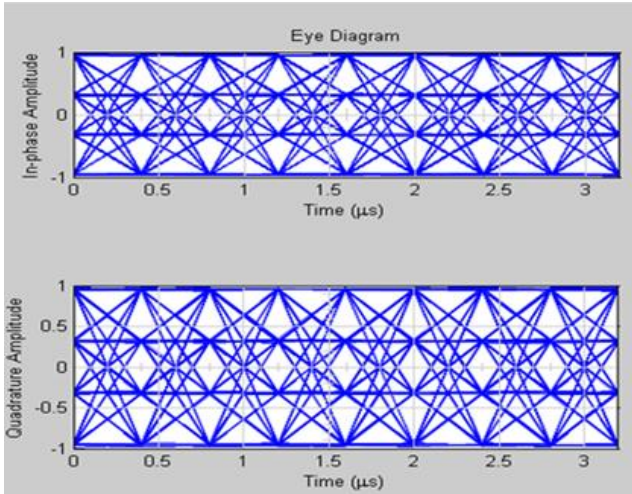


Figure 6 Eye diagram of received signal after equalizer

Figure 7 shows the input and output waveforms of the transmitter and receiver model. The received IQ signals are filtered and fine-gained to convert them into refined IQ signals. Subsequently, the signals are equalized and down-sampled by a factor of 16 to become baseband IQ symbols (2.5mega-baud).

After demodulation, the recovered 4-bit integers (2.5mega-baud) are compared with the transmitter input to confirm all system functions. The difference between the original message 4-bit integer and receiver output 4-bit integer is zero.

The LMS Decision Feedback Equalizer uses a decision feedback equalizer and the LMS algorithm to equalize a linearly modulated baseband signal through a dispersive channel. During the simulation, the block uses the LMS algorithm to update the weights, once per symbol.

If the Number of samples per symbol parameter is 1, then the block implements a symbol-spaced equalizer; otherwise, the block implements a fractionally spaced equalizer.

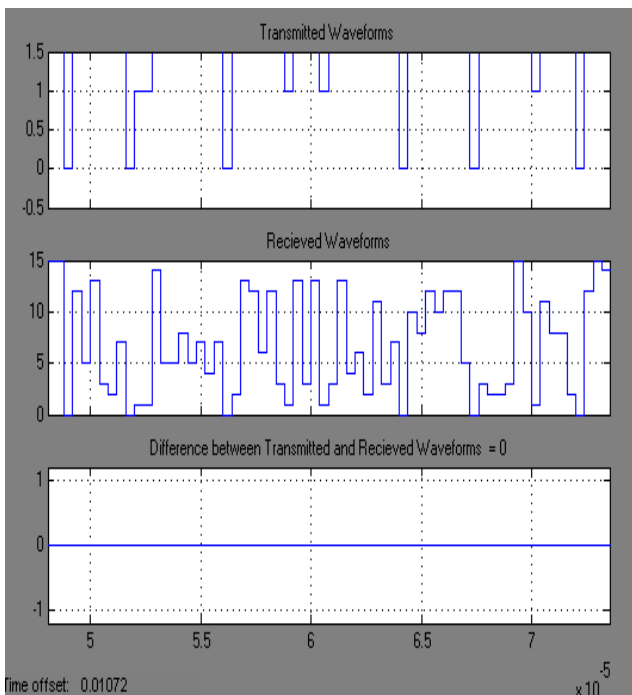


Figure 7 Transmitter input signal and Receiver Output Signal

To show the active noise control of a random noise signal that runs for 1000 samples, the M-file code is used with corresponding parameters to show the effect of proposed equalizer on the noise produced by the channel as illustrated in Figure 8.

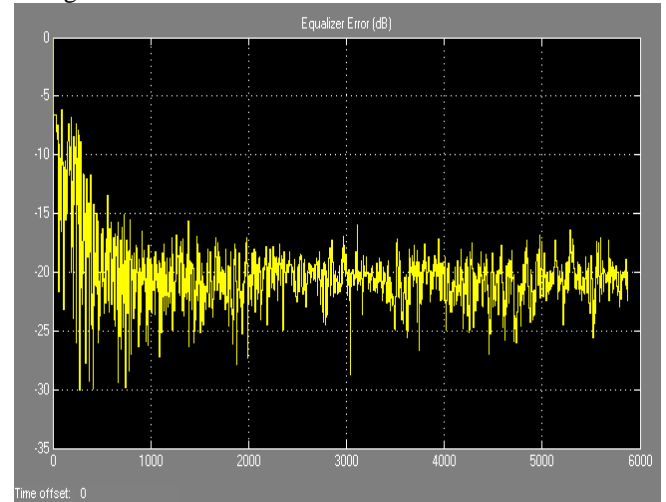


Figure 8 Noise control of random noise signal

#### IV. IMPLEMENTATION OF LMS EQUALIZER

The proposed LMS algorithms has been implemented using system generator block sets as illustrated in Figure 9. The white noise is feed to channel and mixed with noise before passed to the LMS normalized equalizer to compare with the desired signal. At the equalizer output, the error will separated from the original signal.

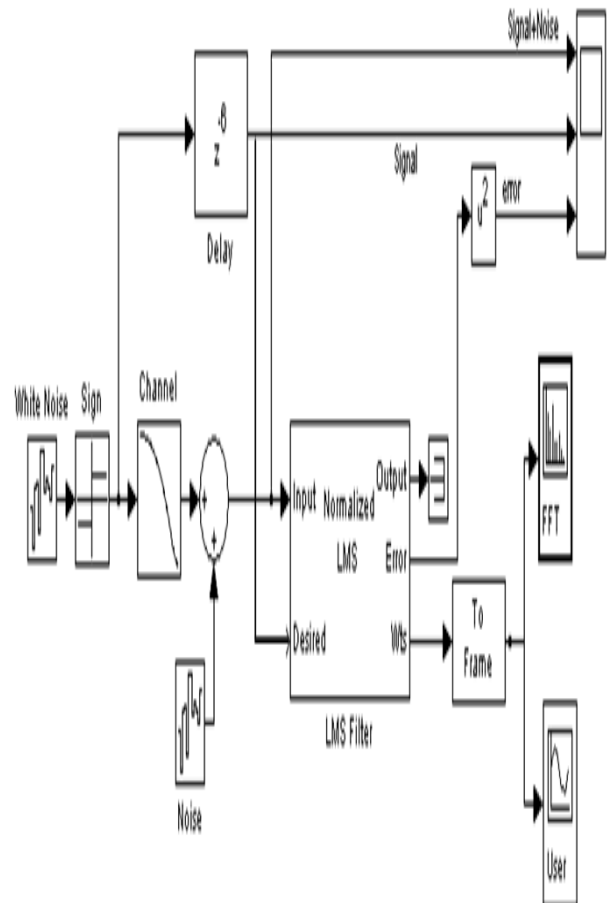


Figure 9 LMS equalizer implementation using system generator

From the results it could be seen clearly the performance of LMS and how this equalizer effect on the signal by cancelling the error between the transmitted and received signals where the process of this equalizer is comparing the input signal shown in figure 9 with the signal after commutating ISI noise and calculate the error ratio between these two signals then updates its weights according to this error ratio till the error between the transmitted and received signals is equal to zero. The results of multiplying the coefficients of LMS by the received samples are dot products which represents the ideal channel response for the LMS equalizer span. As it is clear from the illustrated figure10, the LMS equalizer impulse response has a symmetric impulse response and linear in phase which has a constant group delay that results in no distortion due to frequency selectivity, where the frequency components have equal delay time as show in Figure 11. Finally from figure (12) it could be seen that the process of this equalizer increase the SNR, where increasing in this ratio is desired in order to reduce the noise margin and hence decreases the error.

$$H_2(Z) = \frac{1}{4} + Z^{-1} + \frac{1}{4}Z^{-2} \text{-----} (8)$$

$$H_3(Z) = -\frac{1}{4} + Z^{-1} + \frac{1}{4}Z^{-2} \text{-----} (9)$$

The value of  $\mu$  is taken as 0.001. Tap FIR filter is used for channel equalization and initial values of this filter is set to be zero for all taps. Mean square error is calculated by simulating 100 independent realizations of input signal to each of three channels. The channel impulse response and tapped-equalizer impulse response tends to generate input-output delay. For channel 1, impulse response is symmetric around  $n = 1$ ; so this channel introduces a group delay of 1 unit. Since input is real data; we expect tapped equalizer to be symmetric around  $n = 10$ ; to give linear phase. Hence the total delay introduced at output is 11 units. This delay has been used in our simulations for learning curves. One can conclude that any delay of more than or equal to 2 unit provides almost same mean square error. The proposed algorithm tends to coverage very fast for any delay greater than or equal to 2 units. The convergence rate is slower for delay unit of 1 unit and algorithm doesn't seen to converge when no delay line is used.

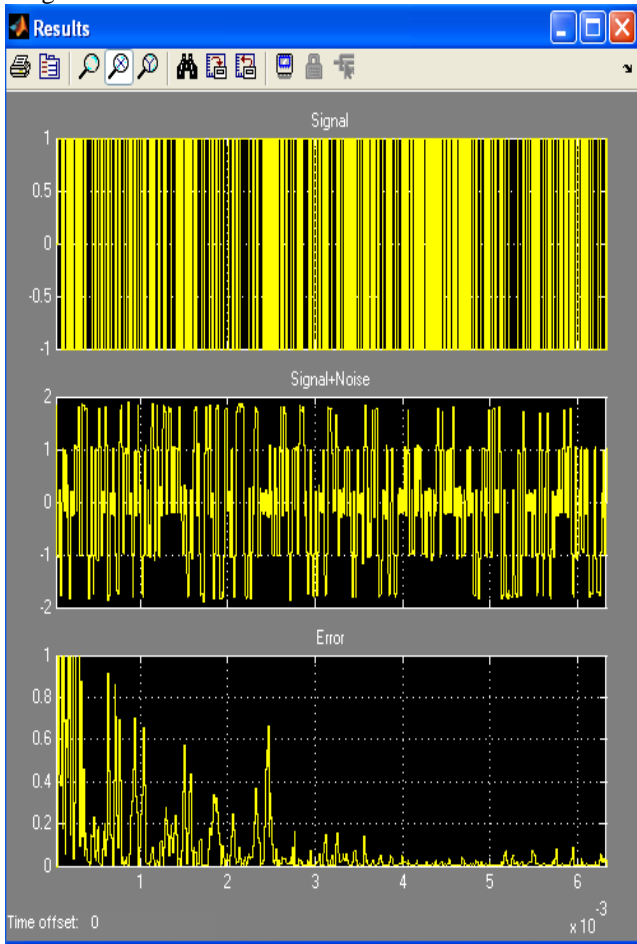


Figure 10 Compressions between the error and original signal

The experimental results obtained by simulating LMS algorithm using Matlab could be discuss in this section briefly. A random signal with amplitude  $\pm 1$  is transmitted through three realizations of channel. The impulse response for each of three realizations is represented by  $H_1$ ,  $H_2$ , and  $H_3$  respectively and their transfer functions are given by,

$$H_1(Z) = \frac{1}{4} + Z^{-1} + \frac{1}{4}Z^{-2} \text{-----} (7)$$

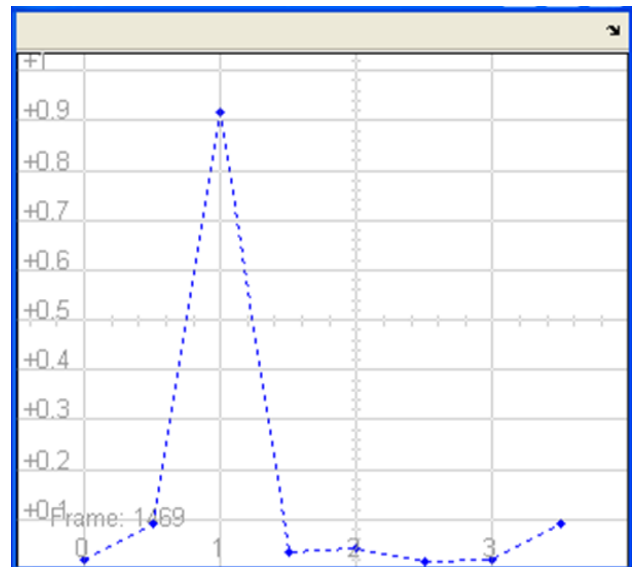


Figure 11 LMS Filter taps

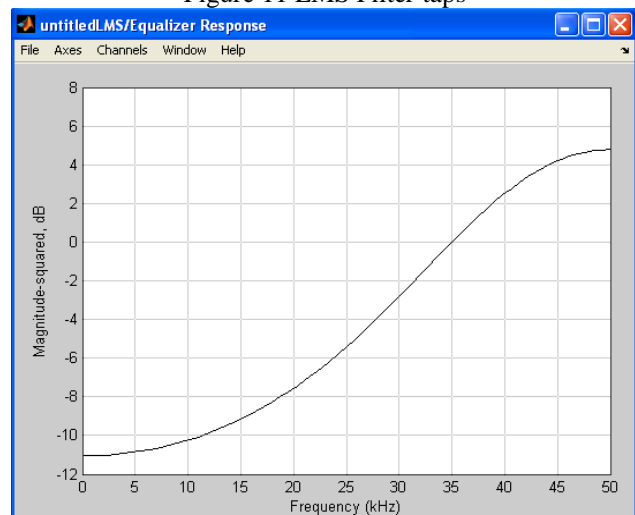


Figure 12 LMS equalizer response

Note that all of the above mentioned simulations have been done for equalizer corresponding to channel  $H_2(n)$ . The delays of 11 units have been used in our simulation, since it matches with theoretical calculation of group delay function of overall system. The converged value of minimum mean square error with respect to delay  $\Delta$  of the channel input, the Mean Square error with respect to number of iterations for different delays  $\Delta$ . Anything greater than  $\Delta > 1$  give good convergence, we plot the draw curves for three step sizes corresponding to  $\mu = 0.01, \mu = 0.005$  and  $\mu = 0.001$ . The draw curves for channel response  $H_1, H_2$  and  $H_3$ . By looking at these curves, we can say that algorithm converges fast as step size is increased. However, we can't increase the step size to any value as condition for convergence requires that step size should be less than the inverse of energy of the correlation matrix of received signal. One of the most important observations from these drawing curves is that the algorithm converges faster for channel corresponding to  $H_2$  and  $H_3$  as compared to  $H_1$ . The reason for this can be found out using the Eigen value spread analysis of each of three received signals.

### V. CONCLUSION

In this paper, an efficient LMS linear equalizer is designed and an implemented using MATLAB and System Generator program has been proposed. Since LMS linear equalizer has better performance than the conventional equalizer. Software based simulation approach has made easily to change system parameters, debug and test easy. Compared to other design, this design has simple design and simulation with the reasonable performance. The proposed LMS linear equalizer could be further improvements by using new adaptation and optimization algorithms. The capability of proposed equalizer within SDR transceivers shows unlimited accuracy to recover the received symbol exactly like transmitted symbol and no error appear were the different between the transmit and received symbol is zero.

### REFERENCES

[1] S. U. H. Qureshi, "Adaptive equalization," Proceedings of the IEEE, vol. 73, no. 9, pp. 1349-1387, 1985.

[2] B. Petersen, D. Falconer, "Suppression of adjacent channel, cochannel and inter-symbol interference by equalizers and linear combiners," IEEE Trans on Communication, vol. 42, pp. 3109-3118, 1994

[3] Ab-Rahman, A.A.H.; Kamisian, I.; Sha'ameri, A.Z.; "VLSI design and implementation of adaptive channel equalizer" Computer and Communication Engineering, 2008. ICCCE 2008. International Conference on 13-15 May 2008 Page(s):1121 – 1124.

[4] Guo Yecai; He Longqing; Zhang Yanping; "Design and Implementation of Adaptive Equalizer Based On FPGA" Electronic Measurement and Instruments, 2007. ICEMI '07. 8th International Conference on Aug. 16 2007-July 18 2007 Page(s):4-790-4-794.

[5] Wei Zhang; Xiaoli Ma; Gestner, B.; Anderson, D.; "Designing low-complexity equalizers for wireless systems" Communications Magazine, IEEE Volume 47, Issue 1, January 2009 Page(s):56 – 62.

[6] Wireless communication THEODORE S. RAPPAPORT, Page(s): 355-362, 374-376,380

[7] Amit Agarwal, "Design and Real Time Implementation of Adaptive Equalizer using Xilinx FPGA". Thesis, IIT Kharagpur, 2009.

[8] C. Dick, F. Harris, M. Rice, "FPGA Implementation of Carrier Synchronization for QAM Receivers", Journal of VLSI Signal Processing, vol.36, pp. 57-71, 2004.

[9] Xuan-Thang Vu, Nguyen Anh Duc, Trinh Anh Vu, "16-QAM Transmitter and Receiver Design Based on FPGA", 5th IEEE Symposium on Electronic design, test and application, pp. 95-98, 2010

[10] Majid S. Nagmash, Mohd Fadzil Ain, Chye Yin Hui, "FPGA Implementation of Software Defined Radio Model based 16-QAM". European Journal of Scientific Research, ISSN 1450-216X, vol. 35 no. 2, pp.301-310, 2009.



Majid S. Nagmash Received His Msc. degree in the satellite communication engineering from University of Technology Baghdad – Iraq-2004 and Doctor of philosophy in wireless and mobile system from University Science Malaysia (USM) Malaysia –Penang -2011. He is currently a head of power engineering department at College of Electrical Power Engineering Techniques-Foundation of technical Education, Ministry of high education and scientific research-Iraq. He has been a full-time lecturer in the Computer Department , Baghdad, Iraq, since March 2012. He also worked as senior researcher in the Iraqi Center of Development and Research since 1994.



Mohammed Hussein. was born in 1956 in Iraq - Baghdad holds a Bklores engineering Electronic and Communications in 1976 and master's degrees in engineering electronic Technology University in 2004-2005, and I am currently a Lecturer at the College of Electrical and Electronic Technique in Baghdad , Crown of scientific research six search individually as though to me the author of a scientific book titled electrical circuits and measurements , a book is a source of scientific and there is a book in the way of achievement , which holds the title of measuring devices and electronic transformers Medical , which is as a book systematically to the Faculty of electrical engineering and reconciled to God



Mousa Kadhim Wali received the B.Sc. degree in Electrical Engineering from Baghdad University, Iraq in 1985, the M.Sc. degree in Electronic Engineering from Bradford University, U.K. in 1991, the PhD degree in computer engineering from University Malaysia Perlis (UniMAP). He is currently with the electrical and electronic technical college, Baghdad, as Senior Lecturer. His current fields of interest are in Emotion Recognition, Stress Assessment, Hypovigilance detection, and early prediction of cardiovascular diseases. PID controller.