

# A Novel Micro Strip Fractal Fork Antenna for Digital Broadcasting Applications

Gummadi Yamini, KQRS Santhosh, P. Chandrasekhar

**Abstract:** - The design of a novel microstrip fractal fork antenna with parasitic patch and double substrate layers for Broad Casting applications has been proposed. The proposed antenna can be used in military satellite communications, weather monitoring, air traffic control, terrestrial broadband, and amateur radio. The antenna's dimensions are 40mm\*40mm\*2.3mm. The antenna has shown a return loss of -50.89dB at 9.54GHz. Far field pattern is calculated at 9.54GHz. The entire simulation is done using CST Microwave Studio.

**Keywords:** - Antenna, Broad Casting applications, far field pattern, fork, fractal, micro strip and return loss.

## I. INTRODUCTION

An antenna is an electrical transducer which converts electrical input signal into electromagnetic waves. Antennas are widely used for broad casting information. The continuous shrinking size of electronic equipments demands similar size antenna elements in order to fit properly in wireless devices without compromising the other radiation properties of the antenna. Hence, the demand for microstrip antennas is increasing day-by-day.

When a micro strip is excited on one end, it acts as an antenna. A micro strip antenna is constructed by mounting a radiating patch on a dielectric substrate. The other side of the dielectric substrate has a ground plane. The patch and the ground plane have very good conducting properties. The patch and the feedlines are mounted on the dielectric substrate by a process called photo-etching. To simplify the analysis and performance prediction, the patch is generally square, rectangular, circular, triangular, and elliptical or some other common shape [6].

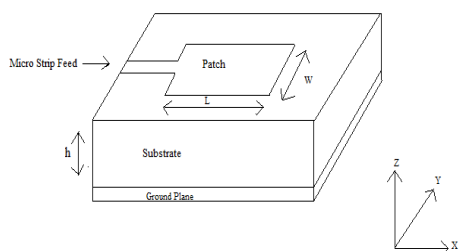


Figure1: Perspective view of micro strip antenna.

Manuscript Received on April 2015.

Gummadi Yamini, Integrated B.Tech, M.Tech, ECE, GITAM University, Visakhapatnam, India.

KQRS Santhosh, B.Tech, ECE, GITAM University, Visakhapatnam, India.

P. Chandrasekhar, Assistant Professor, ECE, GITAM University, Visakhapatnam, India.

## II. BASIC FORK ANTENNA DESIGN

The basic fork antenna has a ground plane made of copper with the following dimensions i.e., length is 40mm, width is 40mm (square patch) and thickness 3.7mm. A substrate is present on the ground plane and the substrate is made from the material FR-4 (lossy), having dielectric constant ( $\epsilon_r$ ) =4.3 and  $\mu =1$ . The substrate has the same dimensions as that of the ground plane except the thickness or height which is 2.1mm. The proposed antenna is a series of patches which are made of copper (annealed) which is a lossy metal and has  $\mu=1$  and  $\rho= 8930$  (kg/m<sup>3</sup>) with the dimensions of 40mm length and 40mm width (square patch) [6].

Antenna Components	Corresponding values for the proposed antenna (mm)
Patch	L=W=40
Feed	W=4
Ground plane	L=W=40, T= 0.1
Substrate	L=W=40, T= 3.5

Table 1: Details of proposed antenna

a	20mm
b	4mm
c	2.37mm
d	15mm
e	6.625mm
f	10mm
g	40mm
h	6.75mm

Table 2: Dimensions of the patch

A micro strip fork shaped antenna is designed using the above dimensions and the prototype of this antenna is shown in figure2.

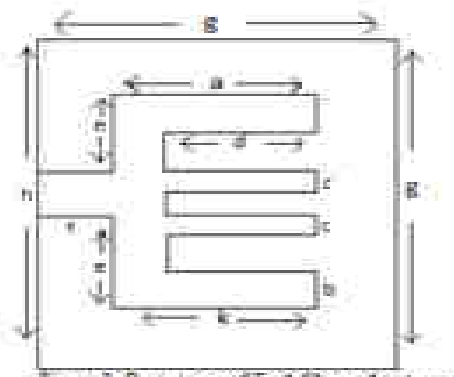


Figure 2: Prototype of Fork Shaped antenna

The above antenna is simulated in CST microwave studio and the results obtained are illustrated in figures 3 and 4. The

antenna has shown a return loss of -49.2dB at 10.02GHz as in figure3. Figure4 shows the far field directivity plot for the designed basic fork antenna. It is observed that the thickness (3.7mm) of the antenna is quite high.

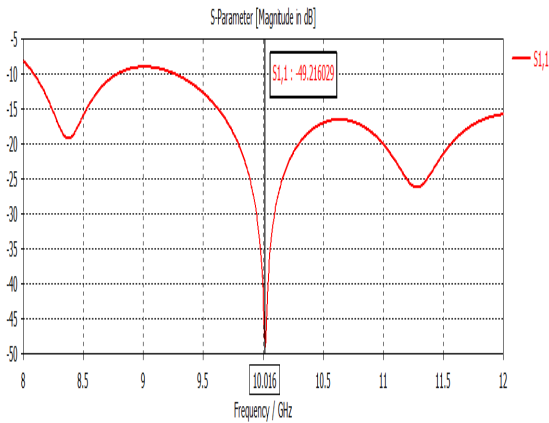


Figure3: Return Loss for the basic fork antenna

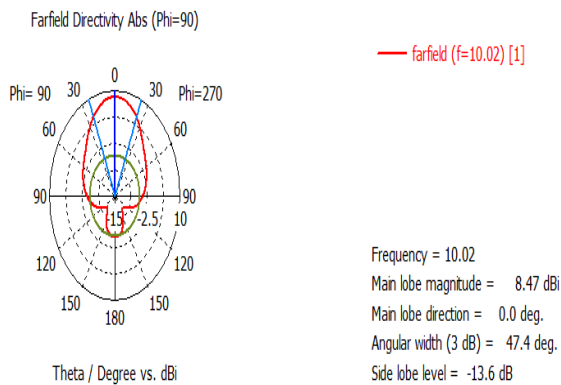


Figure4: Far field directivity plot for the basic fork antenna

III. FRACTAL FOR ANTENNA DESIGN

The above antenna is modified by adding a parasitic patch. Parasitic patch is a component of the antenna to which direct feed is not given. After adding the parasitic patch, the antenna's substrate is divided into two parts. The part immediately above the ground plane is Rogers RT6006 (lossy) and the part below the radiating patch is FR-4 (lossy).

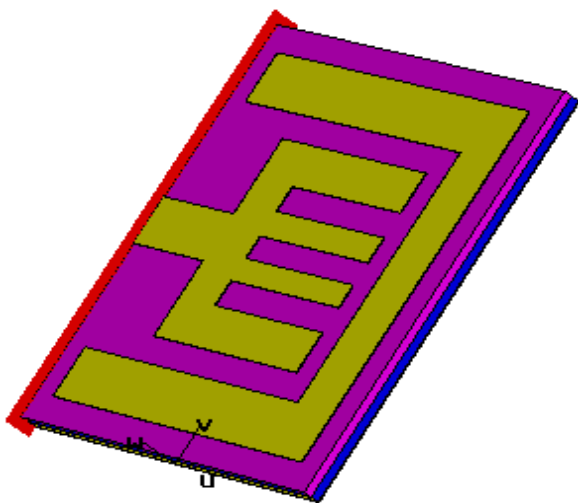


Figure5: Perspective view of double substrate layer antenna

The antenna after simulation has shown a return loss of -53.02dB at 9.792GHz as in figure6. Figure7 shows the far

field directivity plot for the designed basic fork antenna. The thickness of the antenna here is reduced to 1.815mm without compromising on the antenna characteristics.

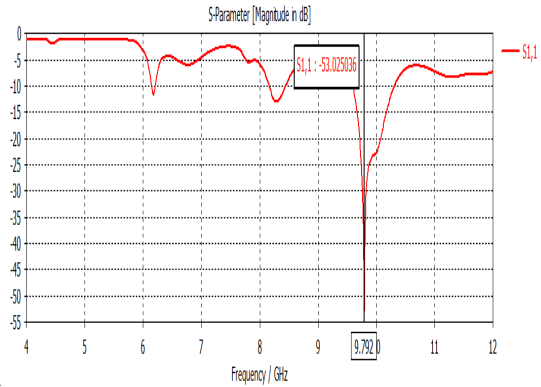


Figure6: Return Loss for double substrate layer antenna

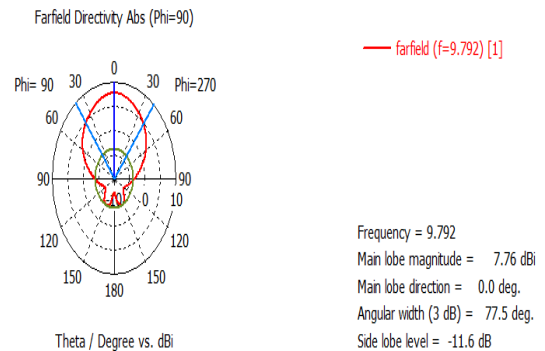


Figure7: Far field directivity plot for double substrate layer antenna

In order to reduce the side lobes effect, circular shaped fractures are etched out of the fork shaped patch and the parasitic patch as shown in the figure8. The modified antenna is simulated and the results are illustrated in figures 10 and 11.

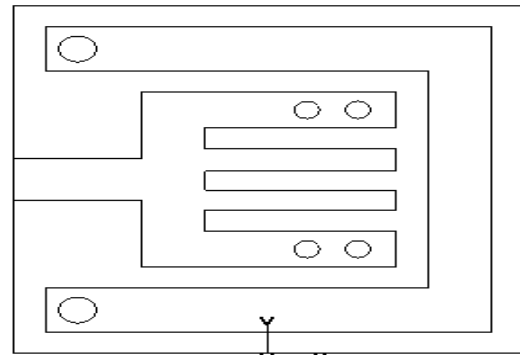


Figure8: Front view of fractal antenna

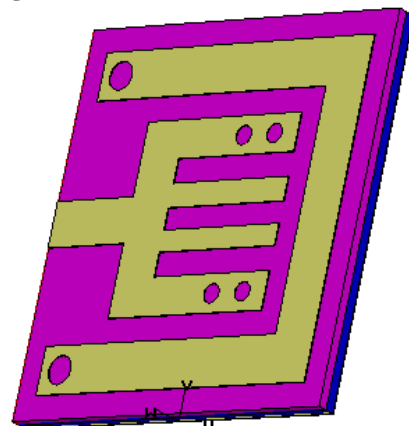


Figure9: Perspective view of fractal antenna

Observing the polar plot, it can be seen that the side lobe effect is reduced and the antenna can be used in broad casting applications.

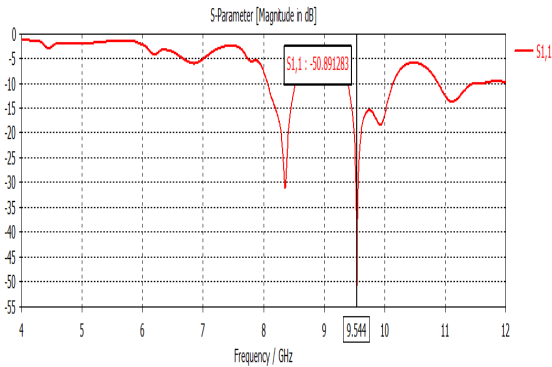


Figure10: Return Loss for fractal antenna

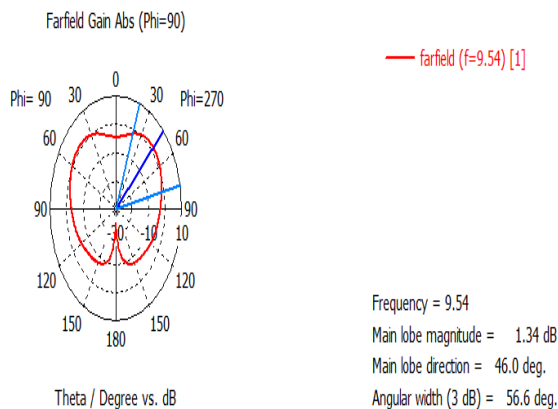


Figure11: Far field directivity plot for fractal antenna

#### IV. CONCLUSION

In this paper, a novel microstrip fractal fork antenna is proposed. The height of the antenna is reduced by replacing one half of the substrate with a substrate having higher dielectric constant value. The side lobe effect is reduced by incorporating symmetric circular fractures in the design.

#### REFERENCES

[1] H.Yoon, H. Kim, et.al, “Design of triangular slot antenna for triple-band (2.4/5.2/5.8 GHz) antenna with fork-like tuning stub”, Microwave and Optical Technology Letters, volume 49, issue 7, 1561-1565, July, 2007.

[2] M.N.Shakib, M.Moghavvemi, et.al, “Design of a compact tuning fork-shaped notched ultrawideband antenna for wireless communication application”, The Scientific World Journal, Article ID 874241, 2014.

[3] G.Deschamps and W.Sichak, “Micro strip microwave antennas”, Proceedings of Third Symp. on USAF Antenna Research and Development Program, 1953.

[4] R. E. Munson, “Micro strip phased array antennas”, Proceedings of Twenty-Second Symp. on USAF Antenna Research and Development Program, October 1972.

[5] R. E. Munson, “Conformal micro strip antennas and micro strip phased arrays”, IEEE Trans. On Antennas Propagation, Volume 22, issue 1, January 1974.

[6] David M. Pozar, “Microwave engineering”, John Wiley & Sons, Inc., Fourth Edition, 2011.

[7] Constantine A. Balanis, “Antenna theory: analysis and design”, John Wiley & Sons, Inc., second edition, 1997.

[8] Mathew M. Radmanesh, “Advanced RF & microwave circuit design: The ultimate guide to superior design”, Author House, 2009.

[9] Roger L Freeman, “Fundamentals of telecommunications”, John Wiley & Sons, Second Edition.

[10] Satish Kumar Sharma, et.al, “Investigation of wide-band microstrip slot Antenna”, IEEE transactions on antennas and propagation, Volume 52, issue 3, March 2004.

[11] Qinjiang Rao, et.al, “A new aperture coupled microstrip slot antenna”, IEEE transactions on antennas and propagation, Volume 53, issue 9, September 2005.

[12] Sunil Kumar Rajgopal, et.al, “Investigations on ultra wideband pentagon shape micro strip slot antenna for wireless communications”, IEEE transactions on antennas and propagation, Volume 57, issue 5, May 2009.

[13] Huda A. Majid, et.al, “Frequency-reconfigurable microstrip patch-slot antenna”, IEEE Antennas and Wireless Propagation Letters, Volume 12, 2013.

[14] P. Tilanthe, et.al, “A monopole microstrip antenna with enhanced dual band rejection for UWB applications”, PIER B, Volume 38, 315-331, 2012.

[15] Computer Simulation Technology, CST studio suite 2010.

[16] D. C. Kulkarni and V. Puri, “Perturbations of EMC micro strip patch antenna for permittivity and permeability measurements”, Progress In Electromagnetics Research Letters, Volume 8, 63–72, 2009.

[17] Wu.F., “Brief introduction of EMC measuring antenna. Safety and EMC”, 2007.

[18] Junshen Yu, et.al, “Study of an ultra-wideband planar elliptical dipole antenna”, University of posts and telecommunication Beijing China, university of London UK, Microwave Technology and Computational Electromagnetics, 2009.

[19] M.A.Peyrot-solis, Mexico.M, et.al, “Orthogonal Ultra wideband Planar Antenna for EMC Studies”, electromagnetic compatibility and electromagnetic Ecology, 2007.

[20] Xiaodong Chen, Lu Guo, et.al, “On the Performance of UWB Monopole Antennas”, IEEE International Conference, 24-26, Sept.2007.

[21] Koledintseva, M. Y. and A. A. Kitaitsev, “Analysis of interaction between a crystallographically uniaxial ferrite resonator and a hall-effect transducer,” Progress in electromagnetics research, volume 74, 1–19, 2007.

[22] Wong, K. L., W. S. Chen, and W. L. Huang, “The absorption and coupling of an electromagnetic wave incident on a micro strip circuit with superstrate,” IEEE. transactions on electromagnetic compatibility, Volume 34, 17–22, 1992.