

# Investigation on Wideband E-Shaped Microstrip Patch Antenna with Dielectric Superstrate

V. Saidulu, K. Srinivasa Rao, P. V. D. Somasekhar Rao

**Abstract**—This paper describes the effect of the superstrates on bandwidth and gain of E-shaped microstrip patch antenna without superstrate and loaded with dielectric superstrates. It is found that there is a degradation in the performance of the antenna when the superstrate is touching the patch antenna i.e its height above the patch antenna ( $H$ ) = 0 mm. Further, it is also observed that the degraded performance characteristics of the patch antenna can be improved by placing the superstrates at optimum height ( $H$ ) =  $H_{opt}$ . The microstrip patch antenna without dielectric superstrate has an impedance bandwidth of 0.17GHz (SWR  $\leq 2$ ) at 2.04 GHz, gain is 8.67 dB and return-loss is -19.95 dB. When the superstrate is placed touching the patch antenna, the resonant frequency is reduced to 1.59 GHz from 2.04 GHz and bandwidth is reduced 0.15 GHz (SWR  $\leq 2$ ) at 1.59 GHz, gain is decreased by about 0.92% (0.08 dB) for  $\epsilon_r = 2.2$  to 39.5% (3.47 dB) for  $\epsilon_r = 10.2$ . As the height of the superstrate is increased, the performance of the patch antenna improves and at a particular optimum height the gain for all the superstrates will be closer to the free space radiation conditions of the patch antenna without superstrate. But the resonant frequency decreases with increase in  $\epsilon_r$ . The variation in the return-loss for  $H = H_{opt}$  is within  $\pm 1.5$  dB of the free space radiation condition for all the dielectric constant of the superstrate and it is within acceptable limits. The bandwidth improves (12%) for  $\epsilon_r$  up to 4.8. However, the bandwidth decreases for  $\epsilon_r = 10.2$ . There is a good agreement between simulated and measured results.

**Index Terms**—E-shaped patch antenna, Superstrate, bandwidth and axial ratio etc.

## I. INTRODUCTION

The characteristics of E-and U- slot microstrip patch antennas have been studied by simulation and experiments by various authors [1-4]. The attention of the most of the researchers [4-6] has been on the evaluation of radiation characteristics of simple E-shaped patch antennas without any superstrate loading. Such an attempt is made in the present work in which all the performance characteristics of superstrate loaded E-shaped patch antenna have been evaluated. It would be of particular interest to realize the advantages associated with superstrate loaded E-shaped patch antenna. This paper presents effect of the superstrate on the characteristics of E-shaped microstrip patch antenna. The schematic diagram of the patch antenna loaded with superstrate is shown in Fig. 1.

The dielectric superstrates of different dielectric constants are used to study the effect on the performance of the patch antenna. The height of the superstrate is varied and the effect of the height is investigated. The simulation method using High Frequency Structure Simulator (HFSS), version 13.0, is employed to obtain the simulated results of performance characteristics without superstrate and loaded with superstrates as a function of dielectric constant and height of the superstrate. The experimental results are obtained with the help of Precision Network Analyzer (Agilent E8363B) and anechoic chamber.

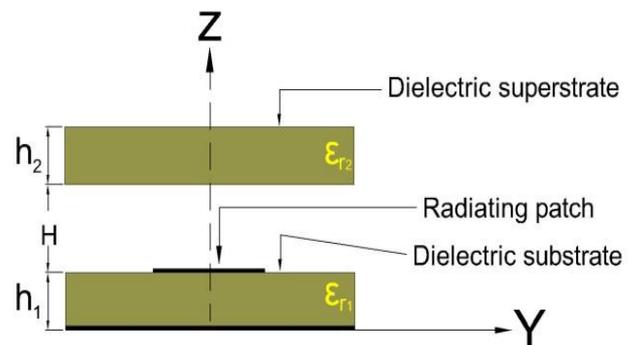


Fig. 1 The schematic of a patch antenna loaded with a superstrate at height H above the patch (side view).

## II. SPECIFICATIONS

The specifications of suitable dielectric substrate and superstrate [7-10] are shown in Table 1 and Table 2 respectively. A thicker substrate is mechanically strong with improved impedance bandwidth [10]. However it will increase weight and surface wave losses. The substrates dielectric constant  $\epsilon_r$  plays an important role similar to that of the substrate thickness. A low value of  $\epsilon_r$  for the substrate will increase the dielectric loss and therefore reduces the antenna efficiency [10, 11].

TABLE 1: Specifications of dielectric substrate ( $\epsilon_r$ ) material used in the design of patch antennas

Substrate material	Dielectric constant ( $\epsilon_r$ )	Loss tangent (Tan $\delta$ )	Substrate thickness ( $h_1$ )mm
Arlon dclad 880	2.2	0.0009	1.6

Manuscript published on 30 April 2015.

\* Correspondence Author (s)

V. Saidulu, Department of Electronics and Communication, MGIT, Hyderabad, T.S, India.

K. Srinivasa Rao, Department of Electronics and Communication, VIFCET, Hyderabad, T.S, India.

P. V. D. Somasekhar Rao, Department of Electronics and Communication, JNTUH, Hyderabad, T.S, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>


**TABLE 2: Specifications of dielectric superstrate ( $\epsilon_{r2}$ ) materials used to study the effect of the superstrate on the performance of the antenna:**

Superstrate Materials	Dielectric Constant ( $\epsilon_{r2}$ )	Loss Tangent ( $\tan\delta$ )	Thickness of the superstrates ( $h_2$ )mm
Air	1.0	0.00009	-
Arlon diclad 880	2.2	0.0009	1.6
Arlon Ad 320	3.2	0.003	3.2
FR4	4.8	0.02	1.6
Arlon Ad 1000	10.2	0.0035	0.8

**III. E- SHAPED PATCH ANTENNA DESIGN AND ITS GEOMETRY**

The E-shaped patch antenna produces a wideband beam. The E-shaped microstrip patch antenna is designed at 2.0 GHz on Arlon diclad 880 substrate ( $\epsilon_{r1}=2.2$ ,  $h_1=1.6$  mm), using expressions available in the standard literature [1, 2, 5, 6]. The designed dimensions of E-shaped patch antenna are given in Table 3.

The patch antenna is fed with coaxial probe at point where the input impedance of the patch is  $50 \Omega$ . The geometry of the E-shaped microstrip patch antenna is shown in Fig.2, where  $W_s$  = Substrate width,  $L_s$ = Substrate length,  $W_p$ = Patch width,  $L_p$ = Patch length,  $S_{1L}$ = Length of the top slot,  $S_{2L}$ =Length of the bottom slot,  $S_{1W}, S_{2W}$  are the width of both top and bottom slot and  $(f_x, f_y)$  are co-ordinates of the feed point.

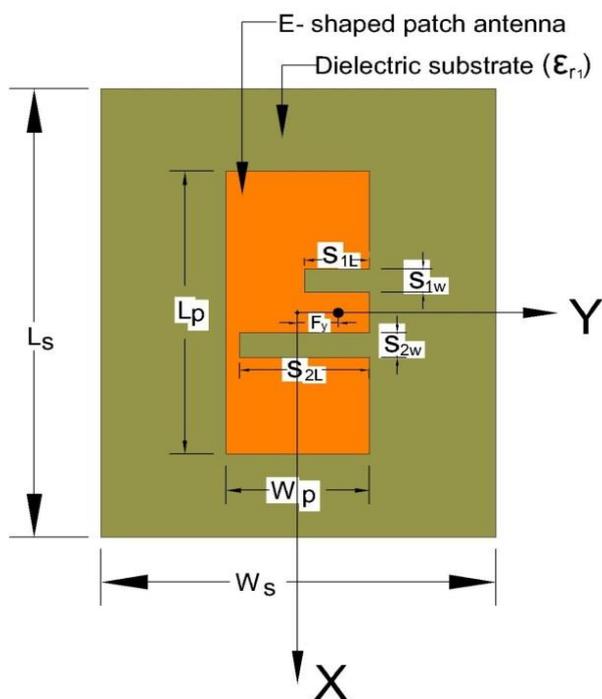


**Fig. 2 The top view of E-shaped microstrip patch antenna.**

**TABLE3: The dimensions of E-shaped patch antenna**

Frequency ( $f_r$ )	2.0GHz
Dielectric constant ( $\epsilon_r$ )	2.2
Thickness (h)	1.6 mm
Substrate ground width ( $W_s$ )	150 mm
Substrate ground length ( $L_s$ )	150 mm
Patch width ( $W_p$ )	55 mm
Patch length ( $L_p$ )	55 mm
Top slot length ( $S_{1L}$ )	25 mm
Top Slot width ( $S_{1W}$ )	8 mm
Bottom slot length ( $S_{2L}$ )	50 mm
Bottom Slot width ( $S_{2W}$ )	8 mm
Feed point location	$f_x=0$ mm and $f_y=9.5$ mm

**IV. EFFECT OF SUPERSTRATE ON E-SHAPED PATCH ANTENNA**

The microstrip patch antenna is covered with the dielectric superstrate as shown in Fig.3. When superstrate is placed above the patch ( $H = 0$  mm) the resonant frequency is shifted to lower side and other parameters are adversely affected.

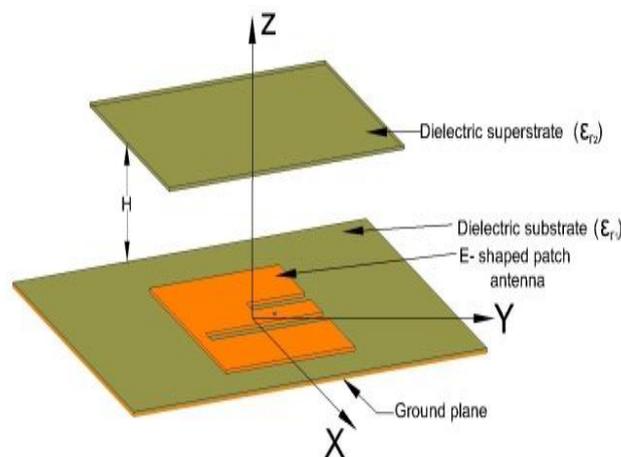

**Fig. 3 The schematic of E-shaped microstrip patch antennas with dielectric superstrate.**

**V. SIMULATED AND EXPERIMENTAL RESULTS**

The performance characteristics of the E-shaped patch antenna are evaluated without dielectric superstrate using commercial electromagnetic software such as High Frequency Structure Simulator (HFSS) version 13.0. Then the change in performance of the antenna is studied with dielectric superstrate of different dielectric materials as mentioned in Table 2. The effect of the height of the superstrate above the patch ( $H$ ) is also studied by simulation. The height at which the performance of the patch is optimum is also found by simulation using HFSS version 13.0. The measurements were carried out by using


- i. Precision Network Analyzer (Agilent E8364B) to measure the return-loss (VSWR), center frequency and bandwidth and
- ii. Anechoic chamber to measure the radiation characteristics.

The antenna under test (patch antenna with and without dielectric superstrate) is used as receiving antenna and the transmitting antenna is a pyramidal horn antenna (0.5-6GHz). The antenna measurements were carried out in Anechoic chamber having dimensions (30×20×15) feet. The distance between transmitting and receiving antennas is kept as 5.3mts. The radiation pattern measurements were carried out at 2.0GHz.


**VI. RESULTS AND DISCUSSION**

As in the case of other patch antennas [10, 11], it is observed that there is a slight degradation in the performance of the antenna when the superstrate is touching the E-shaped patch antenna (H =0 mm). The simulated results show that the center frequency is decreased to 1.59 GHz from 2.04 GHz, bandwidth is decreased to 0.15 GHz from 0.17 GHz, gain is decreased to 5.10 dB from 8.67 dB. The change in the return-loss with increase in dielectric constant is within acceptable limits. The geometry of the patch antenna with dielectric superstrate at a height (H) is shown in Fig.3. A dielectric constant  $\epsilon_{r2}=1$  (air), implies that the patch antenna is without superstrate. The dielectric superstrates with  $\epsilon_{r2}=2.2, 3.2, 4.8, 10.2$  and thicknesses ( $h_2$ )=1.6 mm, 3.2 mm, 1.6 mm, 0.8 mm respectively are employed. The return-loss as a function of frequency for patch antenna without superstrate (free-space condition) is shown in Fig.4. The return-loss as a function of frequency, for particular case,  $\epsilon_{r2}=3.2$  in Fig.5. The overall typical results for the E-shaped patch antenna are given in Table 4, for  $\epsilon_{r2}=1.0, 2.2, 3.2, 4.8, 10.2$  for, H =0 mm and H =H<sub>opt</sub>. The E-plane and H-plane radiation pattern for particular case,  $\epsilon_{r2}=3.2$  is shown in Figs.6 and 7. The gain of the patch antenna is observed to be decreasing with increase in the dielectric constant of the superstrate for H=0.


As the height of the superstrate is increased, the performance of the E-shaped patch antenna improves and at a particular optimum height the gain for all the superstrates will be closer to the free space radiation conditions of the patch antenna without superstrate. But the resonant frequency decreases with increase in  $\epsilon_{r2}$ . The variation in the return-loss is within  $\pm 1.5$  dB of the free space radiation condition for all the dielectric constant of the superstrate and it is within acceptable limits. The bandwidth improves (12%) for  $\epsilon_{r2}$  up to 4.8. However, the bandwidth decreases for  $\epsilon_{r2}=10.2$ . The E-shaped patch antenna produces nearly circularly polarization (AR  $\leq 3$ dB) over the operating frequencies. The simulated and measured axial ratio versus frequency plot for various dielectric constants is shown in Fig. 8 and Fig. 9. There is good agreement between simulated and measured results.

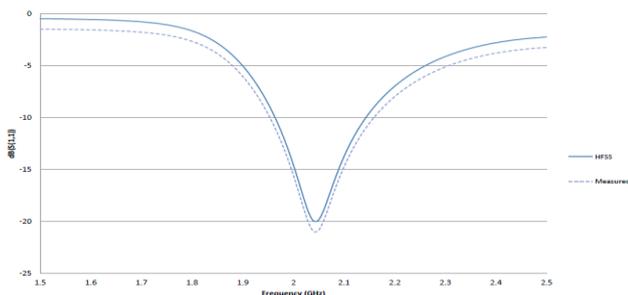

**Fig. 4 Comparison of measured and simulated results of return-loss for E-shaped patch antenna without a dielectric superstrate, ( $\epsilon_{r1} = 2.2, h_1=1.6$  mm) .**

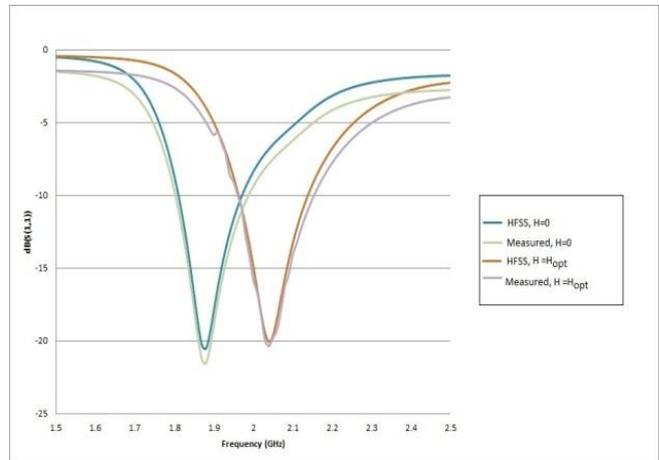


**Fig. 5 Comparison of measured and simulated results of return-loss for E-shaped patch antenna loaded with a dielectric superstrate, ( $\epsilon_{r2} = 3.2, h_2=3.2$  mm) for H=0 and H=H<sub>opt</sub>.**

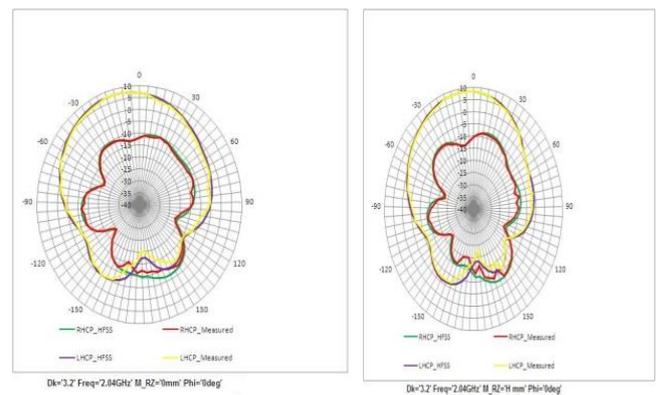

**(a) H = 0 mm**

**(b) H = 17.46 mm**

**Fig. 6 Comparison of measured and simulated radiation patterns for (a) H = 0 mm, phi =0 degrees (b) H = 17.46 mm, phi =0 degrees for E- Shaped patch microstrip antenna ( $\epsilon_{r2}$ ) =3.2 in E- Plane at 2.0GHz.**

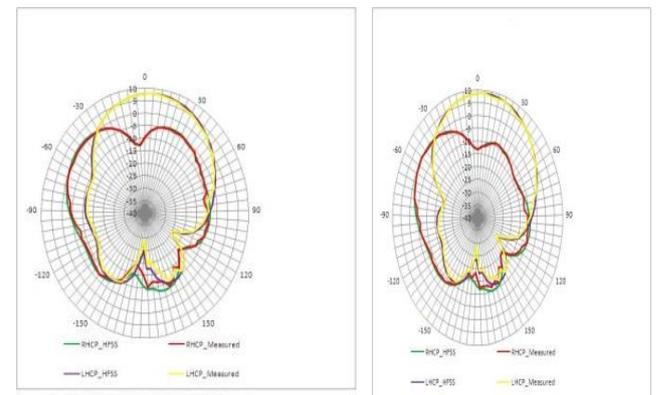

**(a) H = 0 mm**

**(b) H = 17.46 mm**

**Fig. 7 Comparison of measured and simulated radiation patterns for (a) H = 0 mm, phi = 90 degrees (b) H = 17.46 mm, phi =90 degrees for E- Shaped patch microstrip antenna ( $\epsilon_{r2}$ ) = 3.2 in H- Plane at 2.0GHz**

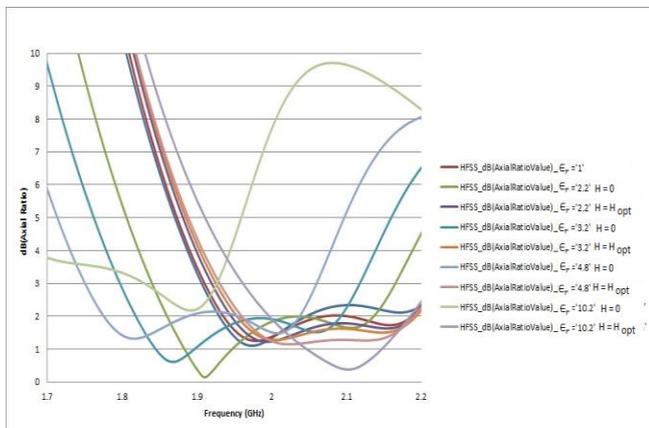


Fig. 8 Comparison of simulated results of axial ratio versus frequency plot for E-shaped patch antenna without superstrate and loaded with a dielectric superstrate for H=0 and H=H<sub>opt</sub>.

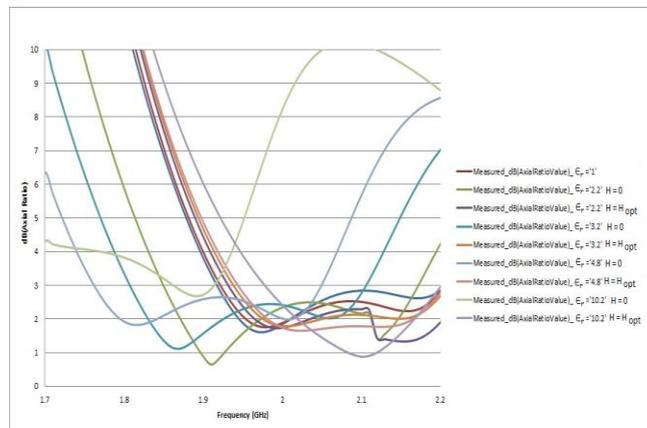


Fig. 9 Comparison of measured results of axial ratio versus frequency plot for E-shaped patch antenna without superstrate and loaded with a dielectric superstrate for H=0 and H=H<sub>opt</sub>.

TABLE 4: Comparison of simulated and measured results of resonant frequency, return-loss, bandwidth and gain of E-shaped microstrip patch antenna without superstrate and loaded with superstrates for H =0 and H = H<sub>opt</sub>.

$\epsilon_{r2}$	Height (H) mm	FREQUENCY (GHz)		RETURN LOSS (dB)		BANDWIDTH (GHz)		GAIN (dB)	
		Simulated	Measured	Simulated	Measured	Simulated	Measured	Simulated	Measured
1.0*	-	2.04	2.04	-19.95	-17.90	0.17	0.17	8.67	8.60
2.2	0	1.94	1.94	-20.34	-19.00	0.16	0.16	8.75	8.70
	21.07 (H <sub>opt</sub> )	1.99	1.99	-20.40	-21.40	0.29	0.29	8.50	8.40
3.2	0	1.88	1.88	-20.53	-20.00	0.16	0.16	7.82	7.70
	17.46 (H <sub>opt</sub> )	1.96	2.96	-20.07	-22.10	0.21	0.22	8.48	8.40
4.8	0	1.79	1.79	-23.62	-22.50	0.15	0.14	7.52	7.45
	14.26 (H <sub>opt</sub> )	1.85	1.92	-19.62	-20.40	0.24	0.24	8.48	8.40
10.2	0	1.59	1.59	-22.18	-21.60	0.15	0.18	5.10	5.20
	9.78 (H <sub>opt</sub> )	1.76	1.76	-18.61	-18.00	0.14	0.14	8.36	8.40

\*without dielectric superstrate

VII. CONCLUSIONS

E-shaped microstrip patch antenna has been designed and fabricated at 2.0 GHz with Arlon diclad 880 substrate having  $\epsilon_{r1}=2.2$ . The effect of the superstrate with different dielectric materials having  $\epsilon_{r2}=2.2, 3.2, 4.8$  and  $10.2$  has been investigated. The simulation and measurements have been carried out for studying the effect of superstrates on various parameters like resonant frequency, bandwidth, gain and return-loss. It has been observed that there is a degradation in the performance of the antenna when the superstrate is touching the patch antenna (H=0 mm). The center frequency is decreased to 1.59 GHz from 2.04 GHz, bandwidth is decreased to 0.15 GHz from 0.17 GHz and gain is decreased to 5.10 dB from 8.67 dB. As the height of the superstrate is increased the performance of the patch antenna improves and at the gain for all the superstrates will be closer to the free space radiation conditions of the patch antenna without

superstrate. But the resonant frequency decreases with increase in  $\epsilon_{r2}$ . The variation in the return-loss is within  $\pm 1.5$  dB of the free space radiation condition for all the dielectric constant of the superstrate and it is within acceptable limits. The bandwidth improves (12%) for  $\epsilon_{r2}$  up to 4.8. However, the bandwidth decreases for  $\epsilon_{r2}= 10.2$ . The simulated and measured results are in good agreement is shown in Table 4.

ACKNOWLEDGEMENT

Authors wish to express their sincere thanks to Shri. M.Balachary Sc’G, Head Antenna Wing, Associate director, DLRL, for giving permission to utilize the antenna measurement facilities available at Defense Electronics and Research Laboratory (DLRL), Hyderabad.



## REFERENCES

- [1] K.Jagadeesh Babu, K.SriRama Krishna and L. Pratap Reddy "A modified E- Shaped Patch Antenna for MIMO Systems," International Journal on Computer Science and Engineering (IJCSSE), Vol.2, No.7, 2010, pp.2427 -2430.
- [2] Ahmed Khidre, Kai Fong Lee, Fan Yang, and Atef Elsherbeni, "Wideband Circularly Polarized E-shaped Patch Antenna for Wireless Applications," IEEE Antennas and Propagation Magazine, Vol. 52, No. 5, October 2010, pp. 219-229.
- [3] Kin-Fai Tong and Ting-Pong Wong, "Circularly Polarized U-Slot Antenna," IEEE Transactions on antennas and Propagation, August 2007, Vol.55, No. 8, pp. 2382-2385.
- [4] Yikai Chen, and Chao-Fu, "Characteristic –Mode-Based Improvement of Circularly Polarized U-slot and E-shaped Patch Antennas," IEEE Antennas and Wireless Propagation Letters, Vol. 11, 2012, pp. 1474-1477.
- [5] Wenwen Yang and Jianyi Zhou, "Wideband Low- Profile Substrate Integrated Waveguide Cavity- Backed E- Shaped Patch Antenna" IEEE Antennas and Wireless Propagation Letter, VOL.12, 2013, PP. 143- 146.
- [6] I J Bhal and P Bhartia, "Microstrip antennas", Artech house, 1980.
- [7] Balanis, C.A., Antenna Theory: Analysis and Design, John Wiley & Sons. 1997.
- [8] Darshan, Ravi Antil and Devraj Gautam", Design High Directive Rectangular Microstrip Patch Antenna with Superstrate," International Journal of Advanced Research in Electronics and Communication Engineering, Vol.3, Issue 8, August 2014, pp. 956-962.
- [9] R.K.Yadav and R.L.Yadava, "Effect on performance characteristics of rectangular patch antenna with varying height of dielectric cover", International Journal of Power Control Signal and Computation (IIPCSC) Vol. 2 No. 1, 2012, pp. 55-59.
- [10] V. Saidulu, K. Srinivasa Rao and P.V.D. Somasekhar Rao" Comparison the Characteristics of Circular and Square patch Microstrip Antennas with Superstrates," International Journal of Advances in Engineering & Technology (IJAET), ISSN NO: 22311963, vol. 6, Issue. 5, Nov 2013, pp. 2236- 2246.
- [11] V. Saidulu, K. Srinivasa Rao and P.V.D. Somasekhar Rao, "Studies on the Effect of Dielectric Superstrates on the Characteristics of Rectangular Microstrip Patch Antenna," National Conference on Recent Trends in Science and Technology (NCRTST) at JNTU, Hyderabad, College of Engineering, Nachupally, Krimnagar, ISBN: 978-93-82570-52-3, 25-26 February, 2015, pp. 157-162.



**V. Saidulu** was born in india, T.S, in 1974. He received the B.Tech in Electronics and Communication Engineering from Nagarjuna university in 1998 and M.Tech in Electronics Engineering (Microwave) from Banaras Hindu University (B.H.U), Varanasi, U.P in 2001 and pursuing Ph.D in Microstrip Antennas. He worked as Assistant Professor from June 2001 to November

2006. Presently he is working as Associate Professor from November 2006 to till date at MGIT, Hyderabad, in Electronics and Communication Engineering. He has published 12 papers in Journals and Conference. His research interests Microstrip antennas, Wireless Communication and Mobile Communication.



**Dr. K. Srinivasa Rao**, was born in Hyderabad, T.S, INDIA, in 1948. He received his B.E in ECE in the year 1973 from college of Engineering, Osmania University, Hyderabad, T.S. He worked as senior scientist in Defence Electronics Research Laboratory, Hyderabad from 1974-78 and as Lecturer in ECE Dept. college of Engineering, O.U.

from 1978 -83. He worked as Associate Professor in ECE Dept. CBIT, O.U. from 1983-88. He worked as Senior Scientist in NERTU, O.U. from 1988-90 and carried out his research work in the area of Microwaves. He received his Ph.D. degree in the year 1995. He was promoted as Professor, ECE in CBIT in 1995 and worked there from 1995-97 and 2000-2008. He worked as Professor and Head, Dept. of VNRVJIET, Hyderabad, T.S. from 1977-2000. After receiving as Professor, ECE in CBIT in 2008, he has been working in various Private Engineering Colleges and presently he is working as Professor in ECE, VIFCET, JNTUH, Hyderabad.

