

Design and Analysis of Microstrip Patch Antenna Arrays for Millimeter Wave Wireless Communication



Md. Farid Shah, Aheibam Dinamani Singh

Abstract: In present 4G the enormously growing of cellular user and the shortage of bandwidth which results in difficulty to provide a high data rate to each end user. To achieve wider bandwidth millimeter wave technology is considered to solve the problem of bandwidth shortage. This paper presents a 4x1 element circular phase array of inset fed rectangular patch antenna operating in the millimeter wave band (24.81GHz-33GHz). To achieve large impedance bandwidth the array is designed with edge coupled parasitic patch arrangement which provides dual resonance. The designed array used the ring-shaped sequential rotation feeding line to reduce the unwanted side lobe radiation. The design antenna array achieved good return loss $-10\text{dB} \leq S_{11} \leq -18.64\text{dB}$ and maintaining 26% (24.81GHz-33GHz) bandwidth. The antenna array has achieved good return loss S_{11} , -18.64dB at 29.09GHz and $VSWR \leq 1.85$ (24.81GHz-33GHz). In millimeter wave wireless communication require high gain antenna to overcome the problem of path loss. The designed array has achieved 10.14dB gain. So the designed will be suitable for the future millimeter-wave wireless communication system.

Keywords : 5G, Millimeter Wave (mmWave) antenna, Long Term Evolution (LTE), Microstrip Patch Antenna (MPA), Coplanar Waveguide (CPW)


I. INTRODUCTION

Over the last decade Scientists, Researchers and Industries exploring mm wave and cm waveband to solve the problem of bandwidth shortage for transmitting uninterrupted high-resolution video, high data rate for mobile communication. Now millimeter wave technology is considered to solve the problem of bandwidth shortage [1]. With growing number of cellular user the mobile traffic demand is increasing day by day. In present 4G LTE has a peak data rate of 100Mbps for fast-moving vehicle (up to 360 km/h) and 1Gbps for motionless or walker mobile customer. The 4G data speeds drop significantly during peak hours and difficult to provide high data rate to the end user.

The challenges demand of thousands of traffic in future 2020 and beyond will unable to meet by the present LTE technology [2][3]. According to CISCO the monthly global mobile data traffic by 2021 will be 49 exabytes and annual traffic will exceed half a zettabyte. Mobile will represent twenty percent of total IP traffic.

Now the researcher planning 5G to solve worldwide 4G data congestion. The technology that satisfying ITU IMT-2020 requirements and 3GPP Release 15 is refer as 5th Generation Wireless System (5G). The design goals of 5G are 20Gb/s peak data rate, 100Mb/s user endured data rate, 10Mbps/m² area traffic capacity, 106 devices/km² connection density, 1ms latency, mobility up to 500km/h, backward compatibility to LTE/LTE-Advanced and forward compatibility to potential future evolution.

In 5G there are many anticipation such as self driving car, mission critical broadcast, industry and vehicular automation, smart city camera, sensor network, remote area medical treatment, office in cloud, multi person video call etc. The devices in 5G should be artificial intelligence and capable to communicate with machine. Super high-capacity and ultra-high-speed data with fresh cost-efficient are needed. The 5G is not a single technology. It is the ecosystem of wireless networks operating scenarios. The designed is the shift from a single regulation system to a multi regulation system. The frequency spectrum vital choice for 5G attention as follows.

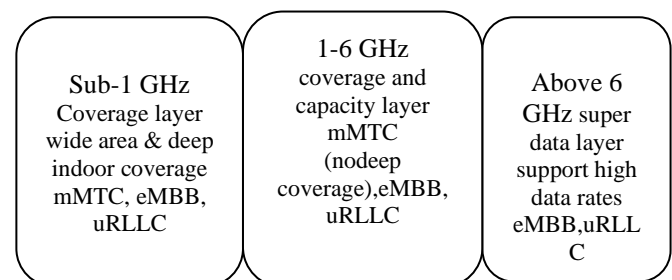

Globally many countries researcher are going research on different frequencies for the 5G frequency spectrum. Table I shows the frequency spectrum consideration for 5G.

Revised Manuscript Received on February 05, 2020.

* Correspondence Author

Md. Farid Shah*, Department of Electronics and Communication NERIST, Nirjuli-791109, Arunachal Pradesh, India.

E-mail: mdfaridshah786@gmail.com

A. Dinamani Singh, Department of Electronics and Communication, NERIST, Nirjuli-791109, Arunachal Pradesh, India. E-mail: aheibam.dinamani@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Table I. 5G Frequency Spectrum Consideration

Low band below 1Ghz	Mid band 1Ghz to 6GHz	High bands above 24 GHz (mmWave)
600MHz 700MHz 850/900MHz	3.4-3.8GHz 3.8-4.2GHz 4.4 -4.9GHz	24.25-27.5GHz 27.5-29.53GHz 37-40GHz 64-71GHz

In higher millimeter wave frequency has the challenges such as high path loss, high penetration loss through buildings, high foliage loss and LOS propagation makes it weak to moving subscriber by blocking. At higher frequency, 60GHz and beyond the application are limited for indoor and short-range scenario due to high absorption rate by oxygen and the surrounding environment. [5],[6]. The frequency 26.5GHz-40GHz will be a more appropriate band in 5G mobile communication for outdoor applications [1][7]&[8].


Recently South Korea has auction the 3.5GHz and 28GHz for 5G spectrum. The Federal Communications Commission (FCC) USA has announced 27.5GHz - 28.35GHz for 5G Spectrum. The International Telecommunication Union (ITU) will soon decide officially the frequency spectrum allocations for 5G. A very narrow beam is needed for point-to point links. It will reduce interfering with other cells to access the network. And has advantages of huge unlicensed bandwidth and the size of the antenna is also smaller.

In [1] 25% impedance bandwidth with multiple ports feeding on a 2x2 multilayer structure of dual polarized antenna array is reported. To achieve the same polarization in a multi-port feeding antenna array, the port to port isolations is one of the main challenges. The various feeding techniques of antennas have been developed such as coaxial feed, coplanar feed, proximity-coupled microstrip feed, aperture-coupled microstrip feed, coplanar waveguide feed, series feed, and corporate feed, have been discussed in [9] [21]. An 8x8 corporate feed microstrip antenna array and electromagnetic coupled antenna array have achieved 17% bandwidth using RT Duroid 5880 with $\epsilon_r = 2.2$, $h = 0.254\text{mm}$ and $\delta = 0.001$ at Ka-band, are presented in [18].


In this paper, a 4x1 antenna array is designed using RT Duroid 5880 with $\epsilon_r = 2.2$, $h = 1.6\text{mm}$ and $\delta = 0.001$ as substrate with a single feeding port and sequential rotation feeding line on a single layer antenna structure. To achieve large impedance bandwidth, the design antenna array used edge-coupled parasitic patch.

II. DESIGN OF SINGLE AND ARRAY INSET FED MICROSTRIP PATCH ANTENNA

There are many different design of modern microstrip patch antenna such as Inverted-F Antenna (IFA), Planar inverted-F Antenna (PIFA), Folded Inverted Conformal Antenna (FICA) and Electromagnetic Band Gap Antenna (EBG). Among Microstrip Patch Antenna the Inset Feed Microstrip Patch Antenna are easy to design and fabricate, low cost, low profile and light weight [9][10]. In this section include a designed of the single element and its array.

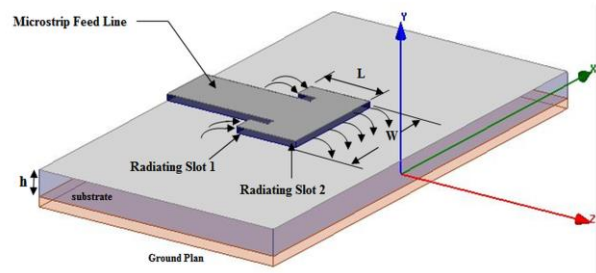

(i)

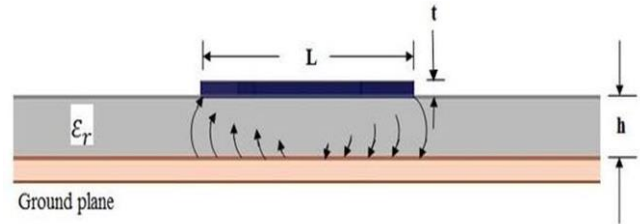

(ii)

Fig.1: Structural view of Inset Feed MPA (i) Isometric view and (ii) Side view.

A. Design Of Single Element

The field distribution and the geometric structure of Inset Feed Microstrip Patch Antenna is shown in Figure1. The Inset Feed Microstrip Patch Antenna input impedance mainly depend on the inset distance Y_0 and inset gap I_g between patch and feeding microstrip line. When a change in inset width effect the value of resonant frequency but the change in the inset length doesn't affect the resonant frequency.

Using RT Duroid 5880 as a substrate, the antenna is designed at 31GHz as the center frequency with $h = 1.6\text{mm}$ and material tangential loss $\tan \delta = 0.001$. In this paper, the different parameters value of the single element Inset Feed Microstrip Patch antenna design are calculated from Balani [11] as follows,

(a) Patch Width (W)

Width of Patch:

$$W = \frac{C}{2f_0 \sqrt{\frac{\epsilon_r + 1}{2}}} \quad (1)$$

Where

C = Speed of light

f_0 = Centre frequency

ϵ_r = Dielectric constant of substrate



b) Patch Length (L)

The effective dielectric constant (ϵ_{reff}) given in the equation as follows:

$$\epsilon_{reff} = \frac{(\epsilon_r + 1)}{2} + \frac{(\epsilon_r - 1)}{2} \left[1 + 12 \frac{h}{w} \right]^{-2} \quad (2)$$

Due to the fringing filed the patch length is extended along its length end is given by:

$$\Delta L = 0.412h \frac{(\epsilon_{reff} + 0.3) \left(\frac{w}{h} + 0.264 \right)}{(\epsilon_{reff} - 0.258) \left(\frac{w}{h} + 0.8 \right)} \quad (3)$$

The actual length (L) of the patch is calculated as:

$$L = \frac{\lambda_0}{2} - 2\Delta L \quad (4)$$

c) Design of Feed Position

The design of feed position to achieve 50Ω input impedance for impedance matching in the microstrip antenna is required to provide maximum power transfer to the antenna. The inset length or the inset feeding position on the edge of Inset Fed Microstrip patch is given by using [12].

$$Y_0 = 10^{-4} \{ 0.001699 \epsilon_r^7 + 0.1376 \epsilon_r^6 - 6.1783 \epsilon_r^5 + 93.187 \epsilon_r^4 - 682.69 \epsilon_r^3 + 2561.9 \epsilon_r^2 - 4043 \epsilon_r + 6697 \} \frac{L}{2} \quad (5)$$

Where Y_0 is the desire inset distance from the edge of the patch towards the patch Centre as shown in figure 2. To match the input impedance of the patch antenna at 50Ω the value of Y_0 is,

$$Y_0 = 0.848\text{mm}$$

$$Y_f = \frac{W}{2} \quad (6)$$

d). Ground Dimension

The dimensions of the ground plane is calculated:

$$W_g = W + 6h \quad (7)$$

$$L_g = L + 6h \quad (8)$$

Where, W_g and L_g denotes width of the ground plane and length of the ground plane respectively.

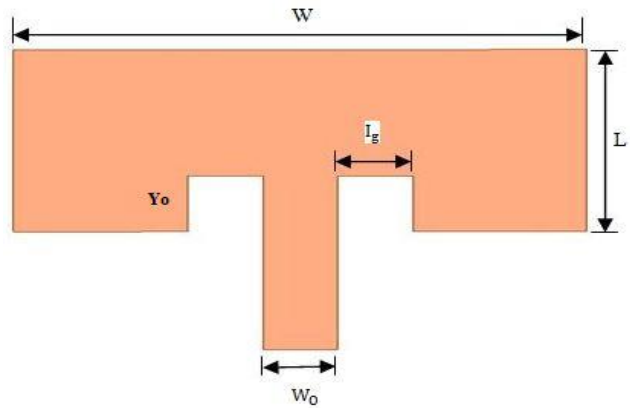


Fig.2: Patch dimension of Inset Fed Microstrip Antenna.

I. Simulations And Results

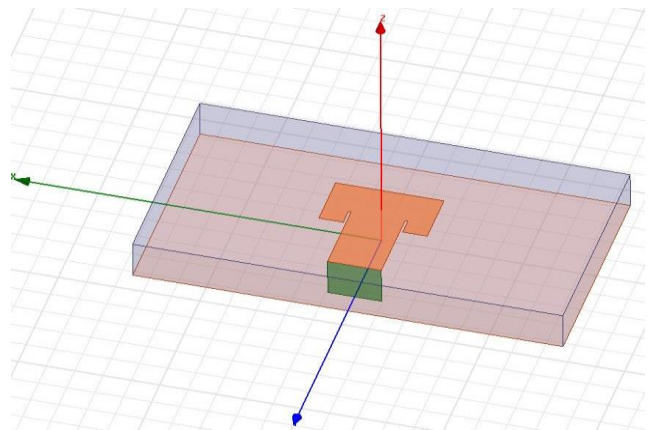


Fig.3: Design of Single Element IFMPA using HFSS 18 version.

The different parameter calculated value of a single element Inset Fed Microstrip Antenna is shown in table I using the design formula [13] to [17].

Table I shows the calculated values of the different parameter of a single element Inset Fed Microstrip Antenna using the design formula[13] to [17].The parametric analysis of different parameter values of the antenna using HFSS gives the optimum result of gain, return loss and VSWR are also given in Table I.

Table i. Antenna parameter

PARAMETER	Length	
	Formula (mm)	Parametric Analysis(mm)
Length of Patch, L	2.078mm	2.1mm
Width of Patch, W	3.823mm	3.83mm
Substrate thickness,h	1.6mm	1.6mm
Ground Length, Lg	11.678mm	8.39mm
Ground Width, Wg	13.423mm	15.2mm
Inset Gap, Ig	1.9mm	0.1mm
Inset Distance, Yo	0.848mm	0.641mm
Microstrip feed width Wo		1.9mm

At 31GHz the designed single element has achieved -13.52dB return loss. The return loss S_{11} is below -12dB in the frequency band 28GHz to 35 GHz shown in the graph Fig.4.

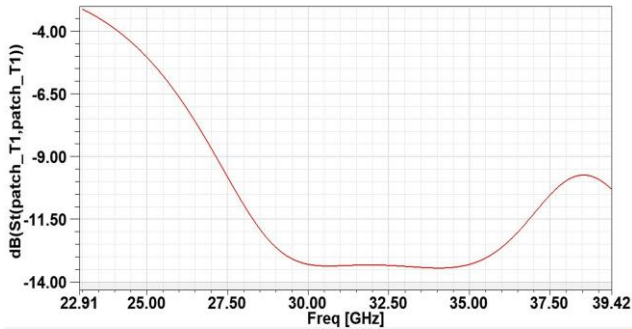


Fig.4: Return loss for 28 GHz to 35 GHz frequency band.

The voltage standing wave ratio (VSWR) of the designed antenna has achieved good results in the frequency band 28GHz-35GHz i.e. $VSWR \leq 1.8$ (28GHz-35GHz). At the center frequency, 31GHz the designed achieved VSWR value of 1.55. Figure 5 VSWR graph shows that the designed antenna has well matched to the input impedance. The designed antenna VSWR result shows that the input port impedance is a well match.

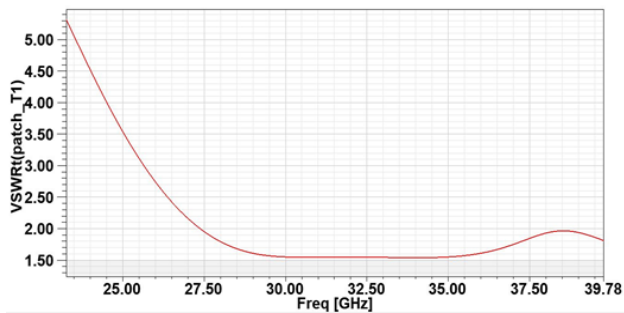


Fig.5: VSWR vs Frequency.

The 3D radiation pattern (gain) of the single element inset fed microstrip patch antenna is shown in figure 6 below. The designed has achieved a maximum gain of 6.165dB.

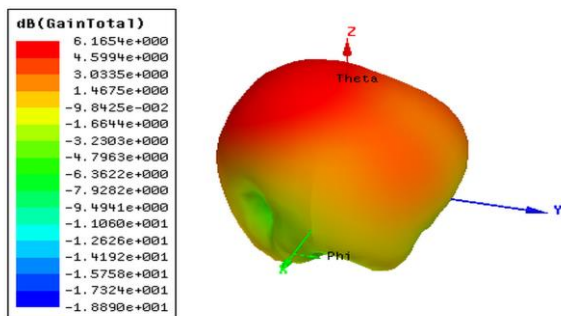


Fig.6: 3D Radiation pattern (Gain).

B. Array Design

The antenna array is designed using RT Duroid 5880 as a substrate and has a dimension of 25mm x 20mm x 1.6mm. The 4x1 circular phase array design using the HFSS18 version software is shown in Figure 7. The designed arrange the four Inset Fed Microstrip Patch Antenna on a

different circular phased array using the sequential rotational feeding line, a feed line with a coplanar waveguide. Using the sequential rotational feeding line provides the unequal excitation to each antenna result to reduce the undesirable radiation i.e. side lobe radiation. Using the ring-shaped sequential rotational feeding line provides the unequal excitation to each antenna results to reduce the undesirable radiation i.e. side lobe radiation is minimized [18] to [21]. In figure 7, $Z_1 = 0.3\text{mm}$, $Z_2 = 0.6\text{mm}$, $Z_3 = 0.9\text{mm}$ and $Z_4 = 1.2\text{mm}$.

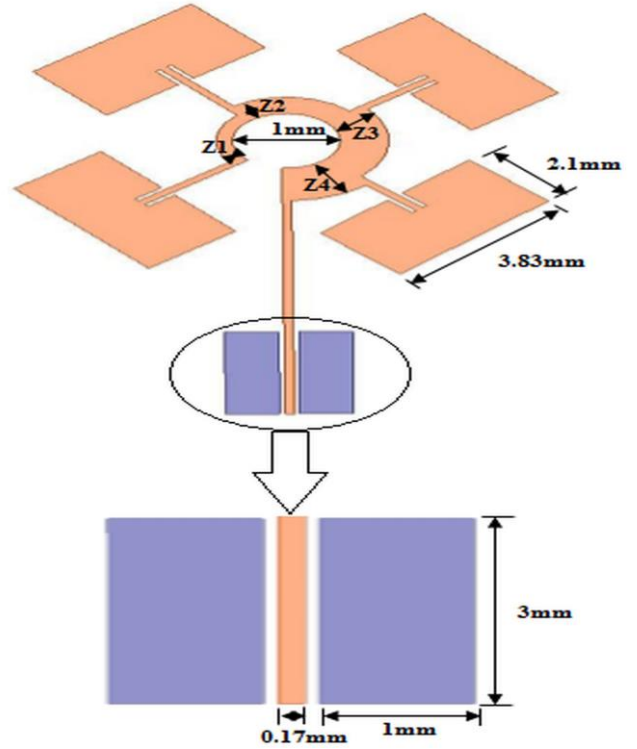


Fig.7: 4x1 circular Phase Array design using HFSS.

The design antenna array achieved good return loss $-10\text{dB} \leq S_{11} \leq -18.64\text{dB}$ and maintaining 26% (24.81GHz-33GHz) bandwidth. The antenna array has achieved good return loss S_{11} , -18.64dB at 29.09GHz. Figure 8 shows the return loss S_{11} of 4x1 designed array.

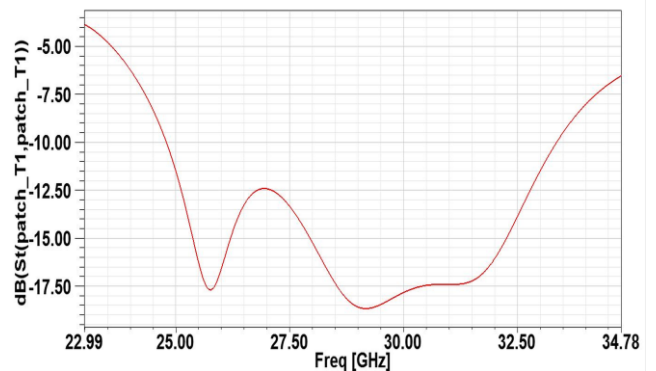


Fig.8: Return loss S_{11} for band (23 GHz-34GHz)

In the lower millimeter frequency the design achieved good VSWR value i.e. $VSWR \leq 1.85$ in 24.81GHz-33GHz and the value is less than 2. So the designed antenna has a wide impedance bandwidth ($VSWR < 2$) of 26% (24.81GHz-33GHz).



The VSWR graph of the 4x1 circular phased array is shown in fig.9.

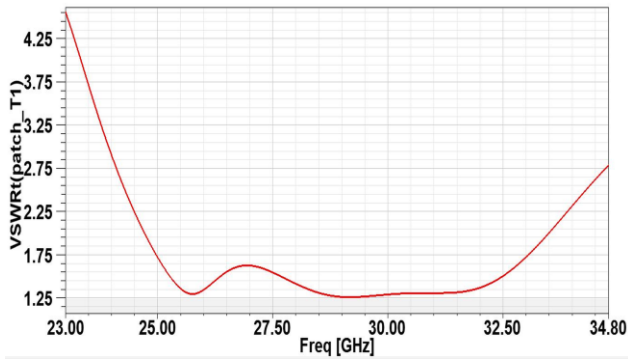


Fig.9: VSWR vs Frequency

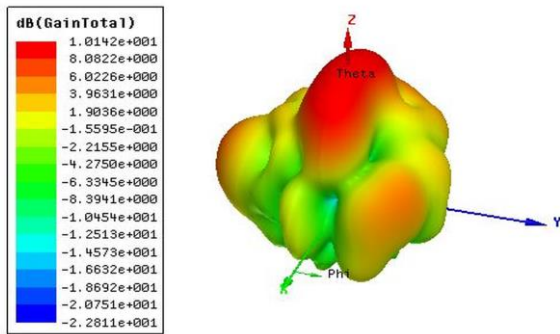


Fig.10: 3D Radiation pattern (Gain)

The 3D radiation pattern (gain) of the 4x1 circular phased array is shown in figure 10 above. The designed array has achieved a maximum gain of 10.14dB.

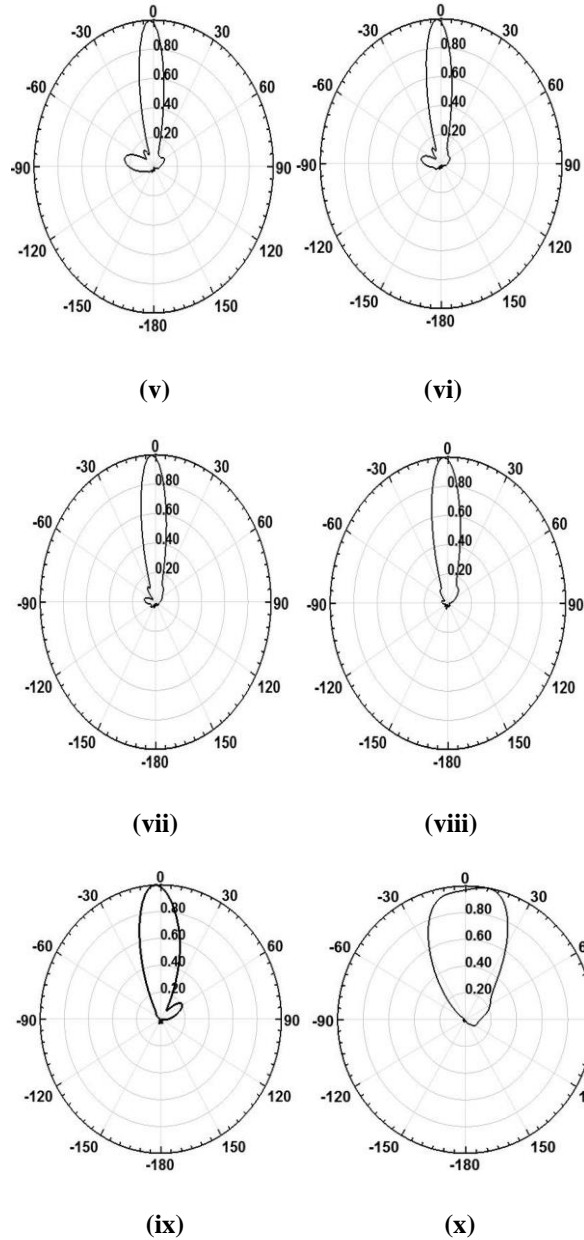
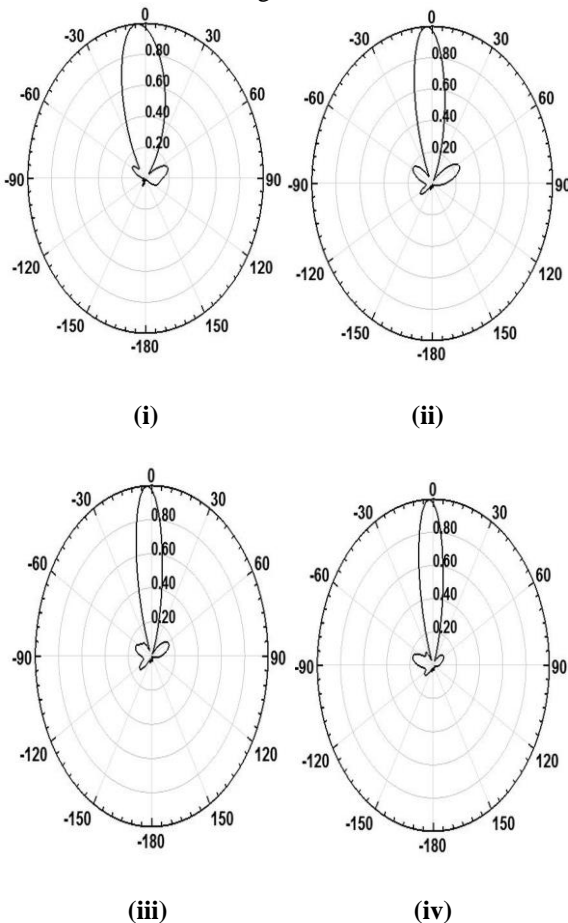


Fig.11: Normalized radiation patterns of designed array at 31GHz different values of ϕ (i) $\phi = 300$ (ii) $\phi = 500$ (iii) $\phi = 600$ (iv) $\phi = 700$ (v) $\phi = 1000$ (vi) $\phi = 1050$ (vii) $\phi = 1100$ (viii) $\phi = 1200$ (ix) $\phi = 1400$ and (x) $\phi = 1800$

Table II. Result Summary

Number Of Element	Gain	Return Loss Bandwidth $S_{11} \leq -10\text{dB}$	VSWR Bandwidth $\text{VSWR} < 2$
Single Element	6.165d B	$-10\text{dB} \leq S_{11} \leq -13.5\text{dB}$ (28GHz– 35GHz)	$\text{VSWR} \leq 1.8$ 28GHz–35G Hz
4x1 Element circular phase array	10.14d B	$-10\text{dB} \leq S_{11} \leq -18.64\text{dB}$ (24.8GHz–33GHz)	$\text{VSWR} \leq 1.85$ 24.8GHz–33GH z

III. RESULT AND DISCUSSION

The designed antenna array achieved return loss bandwidth of 26%. The antenna array has achieved good return loss S_{11} , -18.64dB at 29.09GHz and $VSWR \leq 1.85$ (24.81GHz-33GHz). The designed array has return loss values $-10\text{dB} \leq S_{11} \leq -18.64\text{dB}$ and achieved circularly polarized gain of 10.14dB. The designed array has wide bandwidth of return loss, VSWR and gain. So the designed can used for the mmWave wireless communication.

IV. CONCLUSION

In this paper, present a 4x1 circular phase array Inset fed microstrip patch antenna in the lower mmWave frequency range (24.81GHz-33GHz). To further enhance gain, metamaterial and superstrate should be used in the designed. The proposed array will be suitable for the future short range 5G mmWave wireless communication.

REFERENCE

- Liu S T, Hsu Y W and Lin Y C 2015 A dual polarized cavity-backed aperture antenna for 5G mmW MIMO applications *2015 IEEE Int. Conf. Microwaves, Commun. Antennas Electron. Syst. COMCAS 2015* 0–4
- Roh W, Seol J, Park J, Lee B, Lee J, Kim Y and Cho J 2014 [117] Millimeter - Wave
- Beamforming as an Enabling Technology for 5G Cellular Communications Theoretical Feasibility and Prototype Results 106–13
- Konanur A S, Gosalia K, Krishnamurthy S H, Hughes B and Lazzi G 2005 Increasing wireless channel capacity through MIMO systems employing co-located antennas *IEEE Trans. Microw. Theory Tech.* **53** 1837–43
- Zhang Y P and Liu D 2009 Antenna-on-chip and antenna-in-package solutions to highly integrated millimeter-wave devices for wireless communications *IEEE Trans. Antennas Propag.* **57** 2830–41
- J. H. Van Vleck, "The absorption of microwaves by oxygen," *Phys. Rev.*, VOL. 71.7, pp. 413–424, 1947.
- Razavi B 2008 Gadgets Gab at GHz *Spectrum* **43** 477–85
- Rappaport T S, Ben-Dor E, Murdock J N and Qiao Y 2012 38 GHz and 60 GHz angle-dependent propagation for cellular & peer-to-peer wireless communications *IEEE Int. Conf. Commun.* 4568–73
- Azar Y, Wong G N, Wang K, Mayzus R, Schulz J K, Zhao H, Gutierrez F, Hwang D and Rappaport T S 2013 28 GHz propagation measurements for outdoor cellular communications using steerable beam antennas in New York city *IEEE Int. Conf. Commun.* 5143–7
- David M Pozar 1992 Microstrip antennas *Electromagnetics* **12** 381–401
- Carver K R and Mink J W 1981 Microstrip Antenna Technology *IEEE Trans. Antennas Propag.* **29** 2–24
- Constantine A. Balanis 1997 Antenna theory analysis *Wiley Sons Inc* 722–3
- Ramesh M and Yip K 2003 Design formula for inset fed microstrip patch antenna *J. Microwaves Optoelectron.* **3** 5–10
- Valdes-Garcia A, Reynolds S, Natarajan A, Kam D, Liu D, Lai J W, Huang Y L, Chen P Y, Tsai M Da, Zhan J H, Nicolson S and Floyd B 2011 Single-element and phased-array transceiver chipsets for 60-GHz Gb/s communications *IEEE Commun. Mag.* **49** 120–31
- Sharma S K and Nagarkoti D S 2017 Meet the Challenge of Designing Electrically Small Antennas *Microwaves & RF* 6–9
- Hu Y, Jackson D R, Williams J T, Long S A and Komanduri V R 2008 Characterization of the input impedance of the inset-fed rectangular microstrip antenna *IEEE Trans. Antennas Propag.* **56** 3314–8
- Wu S C, Alexopoulos N G and Fordham O 1992 Feeding Structure Contribution to Radiation by Patch Antennas with Rectangular Boundaries *IEEE Trans. Antennas Propag.* **40** 1245–9
- Prakash P, Abegaonkar M P, Basu A and Koul S K 2013 A simple harmonic reduction technique in inset-fed microstrip patch antennas *2013 7th Eur. Conf. Antennas Propagation, EuCAP 2013* 3474–7
- Mathur P and Kumar G 2017 Improved performance of microstrip antenna arrays through electromagnetic coupling at Ka-band *2016 Loughbrgh. Antennas Propag. Conf. LAPC 2016* 29–32
- IEEE transactions on Antennas and propagation 1982 Input Impedance and Mutual Coupling of Rectangular Microstrip Antennas *October* 1191–6

- Lee B and Yoon Y 2017 Low-Profile, Low-Cost, Broadband Millimeter-Wave Antenna Array for High-Data-Rate WPAN Systems *IEEE Antennas Wirel. Propag. Lett.* **16** 1957–60.
- R. Garg, P Bharati, I.Bahl, and A Ittipiboon, *Microstrip Antenna Design Handbook*, Boston, MA: Artech House, 2000.

AUTHORS PROFILE



Md Farid Shah, received B.E. degree in electronics and communication engineering from Manipur University, Imphal, Manipur, India, in 2011, and M.Tech. in communication system from the University of B.S. Abdur Rahman, Chennai, Tamil Nadu, India in 2014. He is currently pursuing Ph.D. with the North Eastern Regional Institute of Science and Technology, NERIST, Nirjuli, Arunachal Pradesh, India. His research interests include phase array antennas, switched multibeam antenna arrays, adaptive arrays, dielectric resonator antennas, metamaterial antennas, horn antenna, directional antennas and microwave components development for wireless communications systems.



Aheibam Dinamani Singh, received B.Tech. degree in electronics and communication engineering from the University of North Eastern Hills University, NEHU Shillong, India, in 2004. He completed M.Tech. and Ph.D. in electronics and communication engineering from the North Eastern Regional Institute of Science and Technology, (NERIST), Nirjuli, Arunachal Pradesh, India, in 2010 and 2015 respectively. He is currently working as an Associate Professor in the Department of Electronics and Communication Engineering, at North Eastern Regional Institute of Science and Technology, (NERIST), Nirjuli, Arunachal Pradesh, India. His research interests are in the area of wireless communication, Fading Channels, Image Processing, Signal Processing, Antennas array, Millimeter-wave antennas. He published over 45 scientific papers in research journals, international and national conferences.