

# Engine Analyser Software Version 6.0.0 MPFI Engine by Using Fuel Catalyst for Improving Its Performance

Raju Tayade, Harishchandra Gadekar, Suchita Kadam, Sandesh Bhingardeve

**Abstract-** as everyone is aware, the price of fuel keeps on fluctuating from time to time, therefore, oil conservation and saving on fuel is everybody's concern. We all know that extensive use of petroleum products has left our environment highly polluted, leading to various health hazards, ozone layer depletion and global warming. Therefore, it has become inevitable to have some solution at our disposal so as to conserve fuel, reduce pollution and save our environment. One way to conserve fuel, reduce pollution and save our environment is the use of fuel catalyst. Fuel catalyst is a mixture of compounds which helps in efficient burning of fuel. We have carried out a test on MPFI engine with plain petrol and mixture of plain petrol and fuel catalyst. Work also reports evaluation of thermal performance of plain petrol with 0.38% and 0.79% by mass of fuel catalyst and compared with that of plain petrol. Also fuel properties relevant to the fuel were determined for the various concentrations of fuel catalyst, in a mixture of plain petrol and fuel catalyst and also for plain petrol. In this paper it is shown that higher concentration of fuel catalyst in plain petrol leads to effective combustion of supplied fuel which results in lower air fuel ratio for same speed. There is improvement in the thermal performance of engine due to blending of fuel catalyst with plain petrol. Also effect of fuel catalyst on the environment is noted by the measurement of exhaust emission of plain petrol and mixture of plain petrol & fuel catalyst.

## 1. INTRODUCTION

Rapidly increase in fuel prices and traffic pollution along with scarcity of petroleum based fuel has accelerated an interest for improvement in the existing engine systems. But most of the times due to complex manufacturing techniques as well as practical constrain changes is not that much feasible. One of the best ways for improvement is conjunction of fuel catalyst with plain petrol. Petrol engine transforms chemical energy of supplied fuel into thermal energy and uses this energy to produce mechanical work. This study evaluated performance of plain petrol with various concentrations of fuel catalyst and compared with the performance obtained by using plain petrol on the same engine.

### a. Objective

Objective of this study is to assess thermal performance of petrol engine using petrol as a fuel. And compare it with, that to be obtained from petrol with fuel catalyst. Thermal performance is to be evaluated at different load conditions and speed. Also, to evaluate the maximum thermal efficiency using fuel catalyst along with plain petrol and to check the suitability of fuel catalyst from environmental point of view. The optimum concentration of fuel catalyst in plain petrol is also to be found out.

### b. Fuel Catalyst

The main constituents of fuel catalyst are ferrocene, a cleaning agent and binding agent. Ferrocene is ant knocking agent which prevents the knocking of petrol even if the temperature of the system increases. Cleaning agent assures that the carbon deposition in the system decreases. And the binding agent holds all the constituents together. Fuel catalyst has Octane boosting property. Besides this fuel catalyst contains a fuel treatment component as a part of its composition, prevents corrosion of fuel inlet system and combustion chamber. Fuel catalyst is a powerful fuel system cleaner and also cleans the combustion chambers. The fuel system has a job of delivering proper fuel and air mixture to the engine, to give you the performance you need. Use of multifunctional catalyst will lead to better fuel conservation and emission control due to proper combustion of supplied fuel [1].



## 2. PERFORMANCE OF PETROL ENGINE

### a. Engine Parameters

**Brake Power (B.P):** It is the power available at output shaft of an engine.

$$B,P(kW) = \frac{2\pi NT}{60000}$$

Manuscript published on 30 August 2015.

\* Correspondence Author (s)

**Raju Tayade**, Assistant Professor, VJTI, Mumbai (Maharashtra), India  
**Harishchandra Gadekar**, P.G. Student, VJTI, Mumbai (Maharashtra), India

**Suchita Kadam**, Assistant Professor, Bharati Vidhyapeet, Mumbai (Maharashtra), India

**Sandesh Bhingardeve**, Assistant Professor, K.C. Engineering College, Mumbai (Maharashtra), India

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

**Brake Specific Fuel Consumption (BSFC):** The amount of fuel required to be supplied to an engine to develop 1kW power per hour.

$$BSFC\left(\frac{kg}{kWh}\right) = \frac{Flow\ in\ kg\ per\ hour}{Break\ Power}$$

**Brake thermal efficiency ( $\eta_{BTH}$ ):** Thermal efficiency is the indication of conversion of heat supplied into work energy and thermal efficiency based on B.P. is termed as brake thermal efficiency.

$$\eta_{BTH} = \frac{Break\ Power}{Fuel\ Flow(kg/s) \times GCV\ of\ Fuel(kl/kg)}$$

**b. Experimental Setup**

The set up consists of four cylinders, four stokes, and (MPFI) engine connected to hydraulic dynamometer for different loading conditions. It is provided with essential components for measurement of engine parameters. The set up includes fuel tank, fuel measuring unit, load indicator, and speed indicator. Rota meters are provided for water flow measurement of cooling water circulation. Provision is also made to measure exhaust emissions directly with the help of gas analyzer and printer. The set up enables study of engine performance for brake power, indicated power, brake thermal efficiency, brake specific fuel consumption and heat balance

**Engine specification:**

- Engine: 4 stroke 4 cylinder MPFI petrol engine
- Make: Hindustan Motors
- Max. Power: 75 BHP at 5000 rpm
- Max. Torque: 13.3 kg-m at 3000 rpm
- Bore dia.: 84 mm Stroke length: 82 mm
- Connecting rod length: 150 mm
- Swept volume: 1817 cc
- Compression ratio: 8.5:1
- Oxygen cylinder: Size: big, Oxygen quantity: 7 m3 ,
- Pressure: 140 kg/cm2
- Eddy current dynamometer:**
- Rated torque: 7 kg-m
- Arm length: 300 mm
- Test rig Constants:**
- Orifice dia.: 20 mm
- Density of air: 1.193 kg/m<sup>3</sup>
- Density of water: 1000 kg/m<sup>3</sup>
- Density of petrol: 0.73 gram/cc
- CV of diesel: 44500 kJ/kg
- Value of cd: 0.62
- Value of “Cp” for water: 4.18 kJ/kg °K

Table -1: Experimental set up detail

Parameter	Details
Rated Power	75 BHP at 5000 rpm
Rated Torque	13.3 kg-m at 3000 rpm
Cooling Type	Water Cooled
Compression Ratio	8.5:1
Stroke Length	82 mm
Bore Diameter	84 mm

Dynamometer	Eddy current dynamometer
Calorimeter Used	Pipe In Pipe

**c. Experimental Procedure**

Experimental investigation is carried out in three different phases,

1. Sample preparation
2. Measurement of fuel properties
3. Performance tests

**a. Sample Preparation**

Sample is resultant fuel obtained due to different concentrations of fuel catalyst in plain petrol. Various samples used during investigation are as follows

1. Sample 1 (Plain petrol)
2. Sample 2 (Plain petrol + 0.38% by mass of fuel catalyst)
3. Sample 3 (Plain petrol + 0.79% by mass of fuel catalyst)

**b. Measurement of Fuel Properties**

Gross Calorific Value (GCV) and density are the fuel properties vary with concentrations of fuel catalyst in plain petrol

Table -2: Variation in GCV

Samples	GCV(KJ/kg)
Sample 1	45541.41
Sample 2	39949.61
Sample 3	37032.86

Table -3: Variation in Density

Samples	Density (kg/m <sup>3</sup> )
Sample 1	754
Sample 2	763.2
Sample 3	764.6

**c. Procedure for Performance Test**


Ensure cooling water circulation for dynamometer, engine cooling and calorimeter. Also check lubrication level to avoid over heating of engine. Required fuel sample on which test is to be conducted is filled in the fuel tank. Start the set up and run the engine at no load for 4-5 minutes. Starting from no load running condition load is gradually increased. Maximum applied load should not be greater than 80% of maximum load capacity. Variations in speed as well as emissions with respect to gradual load increment are noted.

### 3. RESULT AND DISCUSSION

The performance tests were conducted on different fuel samples. From the performance tests engine brake power, BSFC, brake thermal efficiency and exhaust emissions (HC and CO) with respect to different loads and speeds were obtained as discussed below.

#### a. Brake Thermal Efficiency


Graph 1 shows variation of brake thermal efficiency versus different loads. There is no considerable improvement in brake thermal efficiency at low loads. Brake thermal efficiency increases with increase in fuel catalyst concentration at higher loads. Considerable enhancement can be seen at higher loads.

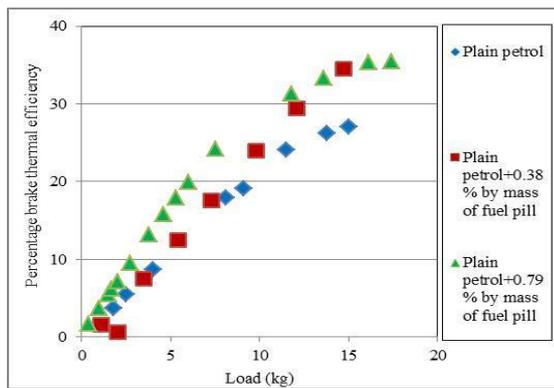

(Graph 1 Variation in percentage brake thermal efficiency with increasing load)

In comparison to plain petrol, it is found that thermal efficiency is increased by approximately 30% and 35% when concentration of fuel catalyst is 0.38% and 0.79% by mass respectively. Fuel catalyst assists fuel to burn more completely in the combustion chamber. Hence for a given load and specific fuel consumption, petrol and fuel catalyst mixture produces more brake power. Hence petrol and fuel catalyst mixture as a fuel shows considerable Enhancement in thermal efficiency, particularly at higher loads


#### Brake Specific Fuel Consumption (BSFC)

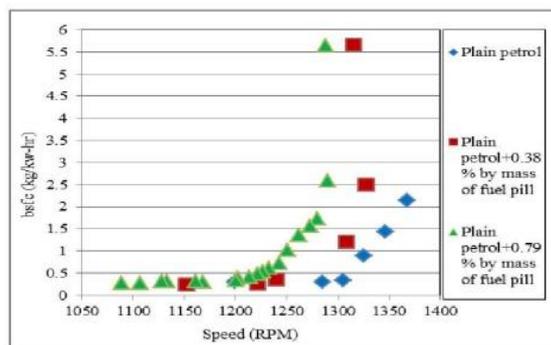

Graph -2: Variation of brake specific fuel consumption with increasing load

Graph-2 and graph-3 shows comparison between BSFC of various samples with respect to different loads and speed conditions respectively.

Brake Specific Fuel Consumption (BSFC) decreases as load on engine increases. This decreasing nature is obtained due to efficient burning of the fuel, as the fuel catalyst has octane number enhancement properties, the fuel burns more effectively. Also octane number of the catalyst must be higher than plain petrol as it acts as a boosting agent. Brake Specific Fuel Consumption decreases on adding fuel catalyst. In comparison to plain petrol, at 15 kg load it decreases by 10.3% for sample 2 and 6.8% for sample 3 at speed ranges between 1050-1200 RPM

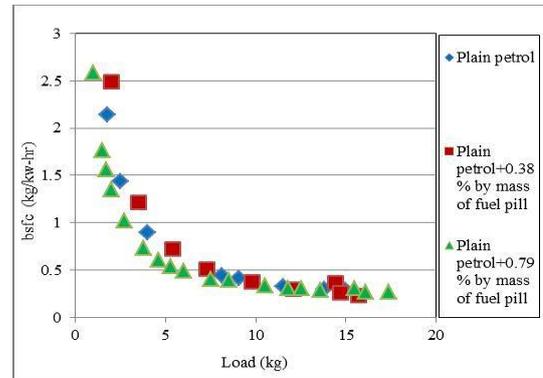


Graph-3: Variation of brake specific fuel consumption with increasing speed

Effect of increasing speed on Brake Specific Fuel Consumption is represented in Chart-3. It has been observed that BSFC drastically increases at higher speed which is quite obvious as at higher speeds the losses due to friction increases and volumetric efficiency decreases. In comparison with plain petrol the mixture of petrol and fuel catalyst achieve high speed earlier; as we can observe from the graphs, a range of 1300 rpm is attended sooner by the mixture of petrol and fuel catalyst than that by plain petrol.

#### Brake Power

From graph-4 it could be observed that engine power decreases at higher speeds because frictional losses are more at higher speed. Besides, comparison with engine power generated by using plain petrol, engine is able to produce same power at lower speeds when concentration of fuel catalyst is more. Hence, it can generate more torque at low speeds. This will increase mileage of engine and ultimately overall life of an engine. There is no considerable improvement in brake power for sample 2 but for sample 3, at 15 Kg load, B.P increases by 5.42 % compared to plain petrol.

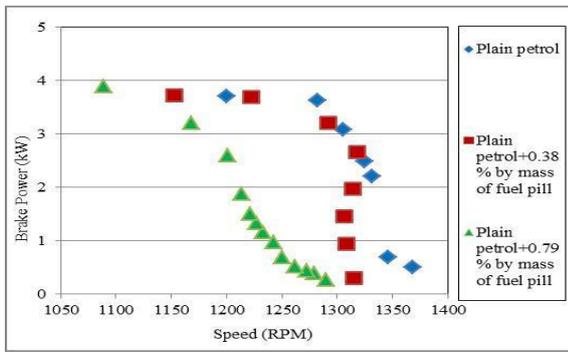


Graph-4: Variation of brake specific power with increasing speed


Exhaust Emissions

Graph-5 and Graph-6 shows comparison of exhaust gases between various samples with respect to different load and speed conditions respectively.

It was observed that percentage of exhaust gases tends to increase with increase in concentration of fuel catalyst. Though there is effective combustion of supplied fuel due to presence of fuel catalyst but CO and HC emissions were found to be increased. This is due to supply of rich mixture for combustion. Emission of CO ranges between 1.4 to 2.1 % while, emission of HC ranges between 550 ppm to 1100 ppm

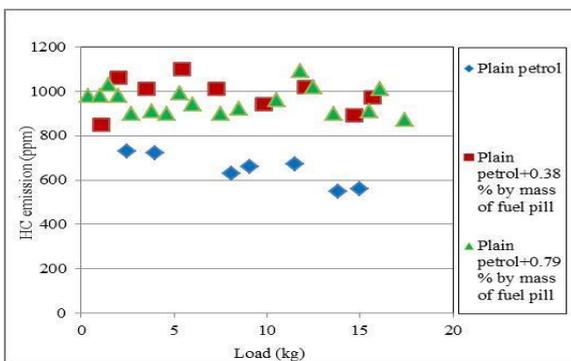

Graph-5: Variation of HC emissions with increasing load

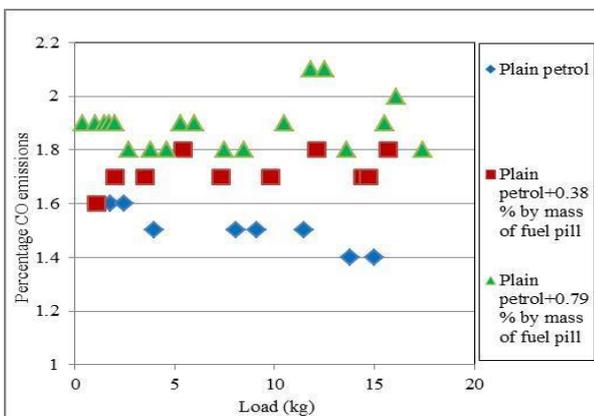

Graph -6: Variation of CO emissions with increasing load

4. CONCLUSION & FUTURE WORK

Conclusion:

- The main pollutants of petrol engine is CO and HC which is harmful for human life, both are reduces only when the complete combustion of fuel should take place. It is done by increasing the oxygen quantity in intake air. In this method these both pollutants are reduced upto 20-30%.
- pollutants of petrol engine are CO<sub>2</sub>, O<sub>2</sub>, NO<sub>x</sub> increases with increase in load and oxygen blend quantity.
- Addition of catalyst in petrol increases the quality of petrol in terms of combustible properties; it also helps in reduction of carbon deposits in fuel delivery system.
- Brake thermal efficiency increases with the increasing fuel catalyst concentration in the mixture of fuel catalyst and petrol. Enhancement observed in brake thermal efficiency is approximately 30% and 35% when concentration of fuel catalyst is 0.38% and 0.79% by mass respectively.
- Increase in brake power of the engine reflects that the BSFC should also increase, but from the experimental results it is observed that as the concentration of fuel catalyst (in a mixture of petrol and fuel catalyst) increases BSFC is reduced by a 10% and 6.9% when concentration of fuel catalyst is 0.38% and 0.79% by mass respectively
- It is also observed that using fuel catalyst engine can produce more torque at relatively low speed thus this ultimately benefits in better engine life.
- Fuel properties such as resultant density and gross calorific value of the mixture are directly proportional to concentration of fuel catalyst.
- There must be reduction in emission of exhaust gases due to use of fuel catalyst but from the obtained results emission of HC and CO increases, it indicates that rich mixture is supplied to the engine. It is necessary to supply more quantity of air for better combustion of petrol and fuel catalysts mixture.

Future Work:

Practical limitations in our laboratory we are Increase The Fuel Burning Ratio Practically.

REFERENCES

- T. Maxwell, V. Setty, J. Jones and R. Narayan, "The effect of on the performance and emissions of Internal Combustion Engines", Society of Automotive Engineers, 1993, Paper No.932804.
- P. Anderson and L. Eriksson , "Air-to-Cylinder Observer on a Turbocharged SI-Engine with waste gate", Society of Automotive Engineers, 2001, Vol-01,262
- S.V.Saravanan , „Investigation of pollution monitoring and its control for the Indian petrol light duty vehicles applications to meet emission regulations", International Journal of Enviromedia, vol.4, 2006 pp.821-826.
- P.Govindasamy and S.Dhandapani , "An Experimental Investigation on the effect of Magnetic flux to reduce emissions and improve combustion performance in a four- stroke catalytic coated MPFI ENGINE", KSAE International Journal of Automotive Technology, 2007, Vol-8, 2006079.

