

# Tabu Search Based General Self-Organized Tree-Based Energy-Balance Routing Protocol (GSTEB) for Wireless Sensor Networks

Harsh Deep, Varsha

**Abstract**— GSTEB has shown quite necessary results over the on the market WSNs protocols. but it's neglected many issues. thus on beat the constraints of the sooner work a completely unique improved technique is planned throughout this analysis work. The planned technique has the flexibility to beat the constraints of the GSTEB routing protocol by pattern clump and TABU search. The comparison square measure drawn among the current and planned techniques. The comparisons has clearly shown that the planned technique outperforms over the on the market techniques. The experimental results has shown an 20.37% improvement in network time period.

**Index Terms**— GSTEB, PASCCC, WIRELESS SENSOR NETWORK, TABU SEARCH..

## I. INTRODUCTION

A wireless device network (WSN) includes of an entire bunch to several thousand low-power multi-functional device nodes, doing add Associate in Nursing unattended setting, and having sensing, computation and connected capabilities. the fundamental aspects of a node undoubtedly a tool unit, Associate in Nursing ADC (Analog to Digital Converter), (Central process unit), Associate in Nursing work unit at the side of a communication unit. device nodes at micro-electro-mechanical systems (MEMS) that create countable reaction to a modification of some physiological condition like temperature and pressure. device sense or live the physical information with the globe to become monitored. The repetitive ANalog signal perceived through the sensors is digitized by Associate in Nursing data converter and delivered to controllers for a lot of method. device nodes of smaller size, use terribly low energy, at operated in high meter densities, that amendment it to be freelance and accommodative towards setting.

The spatial density of device nodes among the sphere may be the utmost quantity as twenty nodes/ m<sup>3</sup>. As wireless device nodes typically smaller electronic gadgets they may entirely be prepared having a restricted power provide. each device node carries a definite an area of exposure for the aim it's planning to and properly report the actual quantity that it ought to be perceptive. Some reasons for power consumE in sensors are: (a) signal sampling and conversion of physical signals to electrical ones; (b) signal acquisition, and (c) analog-to-digital conversion.

**Revised Version Manuscript Received on October 17, 2015.**

**Harsh Deep**, Department of Computer Science, CT Instruction of Management and Technology, Jalandhar, India.

**Varsha**, Department of Computer Science, CT Instruction of Management and Technology, Jalandhar, India.

## II. A GENERAL SELF-ORGANIZED TREE-BASED ENERGY-BALANCE ROUTING PROTOCOL

General Self-Organized Tree-Based Energy-Balance Routing Protocol (GSTEB) builds a routing tree employing a technique wherever for each single spherical, base station (BS) assigns a root node and broadcasts this feature to each device nodes. . Then, each node selects its head by taking into thought alone itself and its neighbours knowledge, thus making GSTEB a robust protocol. Simulation results reveal that GSTEB embrace a much better performance than totally different protocols in reconciliation energy consumption, thus prolong the amount of WSN.

It considers a condition where among the network collects knowledge at regular intervals from a topography where each node frequently senses the surroundings and sends the information back to bachelor's degree. commonly there unit of measurement two definitions for network life span:

- a) The time from the begin of the network methodology to the death of initial node within the network.
- b) The time from the begin of the network methodology to the death of last node within the network.

Two extreme cases in information fusion are:

Case(1): the information among any device nodes is also totally amalgamated. each node transmits the identical volume of knowledge in spite of what proportion data it receives from its children. Case (2) the information can't be amalgamated. The length of message transmitted by every relay node is that the entire of its own detected information and received information from its children.

The chief prepare of GSTEB is to realize a extended network era for various of applications. In each spherical ,BS assigns a root node and broadcasts its ID and its coordinates to each device nodes. at the moment the network computes the trail either through causation the path knowledge from bachelor's degree to device nodes or by having constant tree organization being dynamically and severally designed by every node. for every cases, GSTEB can modify the muse and structure the routing tree with little delay and small energy consumption.

### 2.1 Operation of GSTEB

The operation of GSTEB is split into

- A) Initial section,
- B) Tree Constructing section,
- C) Self-Organized info aggregation and sending section, and
- D) information Exchanging section.

A. Initial section

In Initial section ,the network parameters square measure initialized. Initial section is splitted into three steps.

Step 1: once Initial section starts ,BS broadcasts a packet to

every of the nodes to apprise them of starting time, the length of some time slot and conjointly the number of nodes  $N$ . As all the nodes acquire the packet, they go to calculate their individual energy-level (EL).

Step 2: every node sends its packet a circle with a precise radius throughout its own interval once the primary step. For illustration, among the  $i$  interval, the node whose ID is  $i$  will be able to send away its packet. This packet contains an introduction associate degree put together the knowledge as an example coordinates and EL of node. Every different node throughout this era of your time will observe the channel, and if variety of them square measure the neighbours of node  $i$ , they can receive this packet and record the info of node  $i$  in memory storage.

Step 3: every node sends a packet that consists of all its neighbours' information throughout its own amount of your time once Step a combine of is over. then its neighbours can acquire this packet and record the info in memory storage.

## B. Tree Constructing section

In every spherical, GSTEB performs the numerous steps to form a routing tree:

Step 1: Bachelor of Science assigns a node as root and broadcasts root ID and root coordinates to every detector nodes.

Step 2: every node tries to settle on a parent in its neighbours exploitation EL.

Step 3: Since all nodes chooses the parent as of its neighbors and each node records its neighbors' neighbors' data in Table II, all node can acknowledge all its neighbors' head nodes by computing, and it'll what is more acknowledge all its child nodes. If a node has no child node, it itself as a leaf node, from that the information sending starts.

## C. Self-Organized info aggregation and sending section

After the routing tree is made, every detector node collects information to produce a DATA\_PKT that has to be transmitted to Bachelor of Science.

## D. information Exchanging section

For Case1, as a results of every node has to kind and transmit a DATA\_PKT in every spherical, it ought to exhaust its energy and expire. The vanishing of any detector node can influence the topography. Therefore the nodes that square measure getting to die have to be compelled to apprise others. For Case2, Bachelor of Science can gather the initial EL and coordinates data of each detector nodes in initial section. for each spherical, Bachelor of Science builds the routing tree and put together the agenda of the network by exploitation the EL and coordinates data. Once the routing tree is formed, the energy expenditure of every detector node throughout this spherical could also be calculated by Bachelor of Science, thus the info required for conniving the topology for succeeding spherical could also be celebrated before.

## 2.2 BENEFITS OF GSTEB

Following ar the varied advantages of GSTEB protocol:

- 1) The chief advantage of GSTEB is that it balance the network load.
- 2) GSTEB achieves a improved performance in energy saving, since each node has extra opportunities to pick out the adjacent neighbor because the parent.
- 3) The energy for building the routing tree is deeply condensed.
- 4) within the GSTEB, once the foundation node is electoral, all alternative nodes calculate and find their own oldsters by

themselves in equivalent with no any info swap, so the energy utilization is neglected.

5) GSTEB achieves a extended network lifetime for various applications.

6) GSTEB encompasses a improved performance than alternative protocols in leveling energy utilization, so prolonging the lifetime of WSN.

## III. PRIORITY-BASED APPLICATION-SPECIFIC CONGESTION CONTROL CLUSTERING PROTOCOL

Wireless detector networks comprise resource-starved detector nodes, that unit of measurement deployed to sense the atmosphere, gather info, and transmit it to a base station (BS) for further technique. Cluster-based hierarchical-routing protocols unit of measuring accustomed with efficiency utilize the restricted energy of the nodes by organizing them into clusters. entirely cluster head (CH) nodes unit of measurement eligible for gathering information in each cluster and transmission it to a Bachelor of Science. Unbalanced clusters cause network congestion, thereby inflicting delay, packet lost, and degradation of (QoS) metrics. throughout this study, we tend to tend to tend to propose a priority-based application-specific congestion management clump (PASCCC) protocol, that integrates the standard and dissimilarity of the nodes to sight congestion throughout a network. PASCCC decreases the duty cycle of every node by maintaining threshold levels for numerous applications. The transmitter of a detector node is triggered once the reading of a particular captured event exceeds a particular strength. Time-critical packets unit of measurement prioritized throughout congestion therefore on continue their timeliness wants. In our projected approach, CHs guarantee coverage fidelity by priority the packets of distant nodes over those of near nodes. a singular queue programing mechanism is projected for CHs to appreciate coverage fidelity, that ensures that the additional resources consumed by distant nodes unit of measure used effectively. The effectiveness of PASCCC was evaluated supported comparisons with existing clump protocols. The experimental results incontestable that PASCCC achieved higher performance in terms of the network quantity of some time, energy consumption, data transmission, and utterly totally different QoS metrics compared with existing approaches.

cluster-based routing protocol is given. To the foremost very effective of information, PASCCC is that the initial protocol of its kind to ponder quality, dissimilarity, and congestion detection and mitigation utilizing a bunch hierarchy. many studies have self-addressed congestion detection and mitigation, but they're either generic or specifically associated with the transport layer. Following assumptions with regard to the PASCCC unit of measurement made:-

1. Nodes unit of measurement deployed indiscriminately among the sphere with another style of energy values.
2. Nodes unit of measurement designed for adjusting their transmission capability to possess the facility to realize a awfully distant CH on prime of a specific spherical.
3. The positioning of a Bachelor of Science isn't fixed and it would be either at intervals or off from detector field.
4. Nodes unit of measurement designed for moving throughout the arena to cover vacant areas utilizing the random waypoint quality model with associate degree rate of

interest  $V$ , where the goodness of  $V$  ranges between  $V_{min}$  and  $V_{max}$ . Hence, complete coverage of the detector field is secured.

In PASCCC, the nodes unit of measurement designed for moving over the arena if necessary to possess the facility to cover vacant regions. quality ensures complete coverage and property within the slightest degree times. Hence, it is not as probably that a generated event goes unreported. In PASCCC, one hundred pc of the nodes unit of measurement advanced. These nodes have higher energy in distinction to ancient nodes, thereby developing a heterogeneous amount of nodes among the network. PASCCC is definitely associate degree application-specific protocol. In scheme, two application parameters unit of measurement thought victimization PASCCC: temperature and wetness. PASCCC acts as a reactive protocol for temperature observance and as a proactive protocol for wetness. In reactive routing protocols, the nodes react sort of a shot to unforeseen and forceful changes among the values of detected events, and that they square measure applicable for time-critical applications. In proactive routing protocols, the nodes activate their transmitters, sense environmental surroundings, and report captured information periodically to the Bachelor of Science. These protocols unit of measurement be applications that need periodic information transmission.

#### IV. TABU

Tabu Search may be a meta-heuristic that guides native|an area|a neighborhood} heuristic search procedure to explore the answer house on the far side local optimality. one in every of the most elements of Tabu Search is its use of adaptative memory, that creates a additional versatile search behavior. Memory-based ways ar so the hallmark of tabu search approaches, based on an exploration for “integrating principles,” by that different sorts of memory ar befittingly combined with effective ways for exploiting them. a completely unique finding is that such principles ar typically sufficiently potent to yield effective downside finding behavior in their title, with negligible reliance on memory. Over a good vary of downside settings, however, strategic use of memory will create dramatic variations within the ability to resolve issues. Pure and hybrid Tabu Search approaches have set new records to find higher solutions to issues in production coming up with and programming, resource allocation, network style, routing, monetary analysis, telecommunications, portfolio coming up with, offer chain management, agent-based modeling, business method style, prognostication, machine learning, data processing, biocomputation, molecular style, forest management and resource coming up with, among several different areas.

The TS technique is apace turning into the strategy of alternative for coming up with answer procedures for exhausting combinatorial optimisation issues. A comprehensive examination of this system will be found within the book by Glover and lagune (1997). Widespread successes in sensible applications of optimisation have spurred an ascension of the strategy as a way of distinguishing very prime quality solutions with efficiency. TS strategies have conjointly been accustomed produce hybrid procedures with different heuristic and algorithmic strategies, to supply improved solutions to issues

##### 4.1 Solving the problem by local search

One of the foremost winning strategies of assaultive massive scale onerous combinatorial improvement problems is native search (Ahuja et al. 2002; Michiels et al. 2007). each native search technique relies on the construct of an area perform, that's a mapping  $N$ , that for every resolution  $X$  assigns a set of solutions  $N(X)$  that may

be reached in one move ranging from  $X$ . The set  $N(X)$  is named a neighbourhood of  $X$ . a neighborhood search rule starts from a possible resolution  $X_0$  and performs a sequence of moves, that include selecting an answer

$$X_{i+1} \in N(X_i).$$

By specifying methodology of selecting an answer from the neighbourhood and a stopping criterion we tend to obtain a selected form of the native search algorithms such as: unvarying improvement, simulated hardening, threshold acceptance or tabu search.

Tabu search rule. Ensure: The neighborhood  $N(T)$ .


- 1:  $N(T) \leftarrow \emptyset$
- 2: for all  $e \in E \setminus T$  do
- 3: verify the set of edges that area unit on the trail from  $i$  to  $j$  in  $T$
- 4: for all  $f \in \text{do}$
- 5: Add  $T \cup \{f\}$  to  $N(T)$
- 6: end for
- 8: come  $N(T)$

our main goal is to construct a quick tabu search rule for computing solutions of fine quality for giant instances of the minmax regret minimum spanning tree downside. the quality works on the tabu search technique and a few of its applications to onerous combinatorial improvement issues will be found in Glover (1989, 1990), Glover and lake (1997).

#### V. PROPOSED METHODOLOGY

In this flow chart first of all initialize WSN. In network the big range of network having device node that work on unattended surroundings. Network device nodes within the deploy device node haphazardly then assign the initial energy to them thereon steps assume the A method. IF condition use on any step IF wireless device network that initialize its multiple with energy larger than capable o. IF that condition is TRUE then count as dead and IF dead equals to  $n$  then its TRUE its come to the  $n/w$  time period. IF its FLASE then its continue A. On initial Condition that use on first of all initialize wireless device node that multiple with energy larger than capable o. its FLASE then they choose the randomly device node which larger than tabu node if its TRUE. They set because the cluster head however its choose the randomly device node which greater than tabu device node if its FLASE thereon time they assign because the member node. In wireless device network having then large range of device node from these device number of node its choose randomly the member node from number of node then associate member node to cluster head victimization the geometer distance which calculate the node move distance. on it its apply the TABU SEARCH on cluster head thanks to that sink communicate with one another and transfer the information to sink. once that method is running thereon time they update the remaining energy. and that they once more continue the A method..



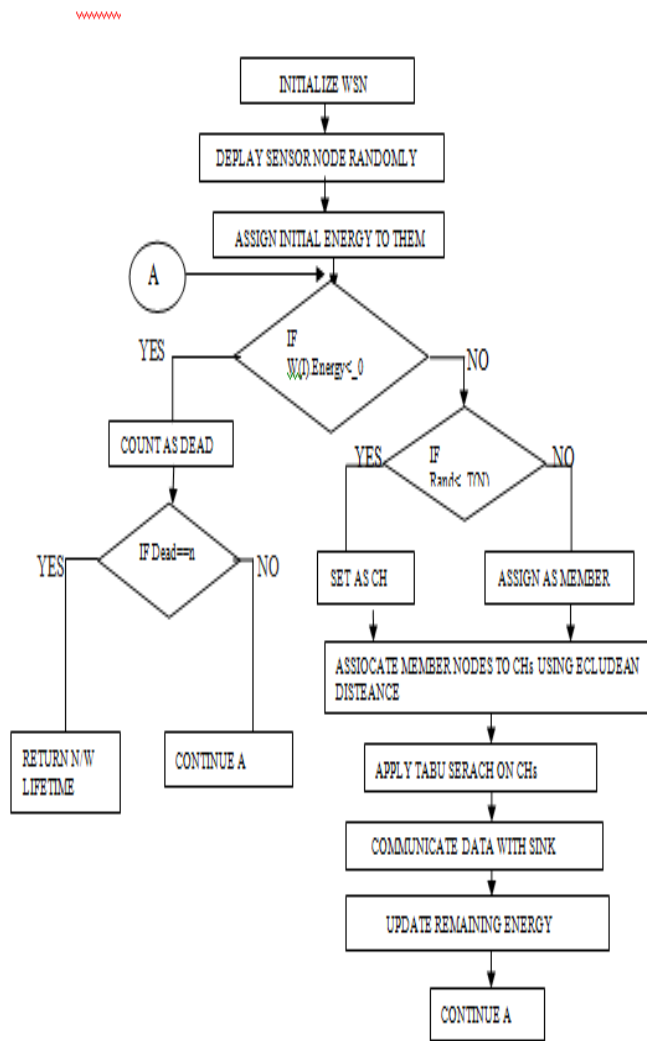

**FLOW CHART OF PROPOSED METHODOLOGY**

**VI. RESULTS AND DISCUSSION**

To study the GSTEB ,PASCCC routing protocol in wireless sensor network To proposed andnimplement TABU SEARCH GENERAL SELF ORGANIZED ENERGY BALANCE ROUTING PROTOCOL for selection of cluster head To comparative analysis of proposed TBGSTEB(TABU SEARCH general self organized energy balance routing protocol ) with general self organized energy balance routing protocol(GSTEB) and PASCCC by using parameters .Stable period , network lifetime , half node dead time , packet sent to base station , packet sent to cluster head, residual energy

**6.1 EXPERIMENTAL SET-UP**

In order to implement the projected style and implementation has been done. Table 5.1 has shown a range of constants and variables needed to simulate this work. These parameters square measure normal values used as benchmark for WSNs.

**Table 6.1: Experimental Setup**

Parameter	Value
Area(x,y)	100,100
Base station(x,y)	100,100
Nodes(n)	3000
Probability(p)	0.1

Initial Energy(Eo)	0.1
transmitter_energy	50nJ/bit
receiver_energy	50nJ/bit
Free space(amplifier)	10nj/bit/m2
Multipath(amplifier)	0.0013pJ/bit/m <sup>4</sup>
a (energy factor between normal and advance nodes)	1
Maximum lifetime	3000
Message size	4000 bits
Effective Data aggregation	5nJ/bit/signal

**TABLE 6.1.1 FIRST NODE DEAD**

Table 6.1.1 has shown the comparison among GSTEB, PASCCC and TBGSTEB with respect first node dead time. It has been clearly shown that the number of rounds for first node dead in case of the TBGSTEB are quite more than the GSTEB&PASCCC.

**TABLE 6.1.1 FIRST NODE DEAD**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	40	19	83
0.04	80	49	172
0.06	119	60	256
0.08	168	95	340
0.10	209	120	436
0.12	238	139	524
0.14	278	168	591
0.16	316	165	687
0.18	357	195	779

Table 6.1.2 has shown the comparison among GSTEB, PASCCC and TBGSTEB with respect half nodes dead time. It has been clearly shown that the number of rounds for half nodes dead in case of the TBGSTEB are quite more than the GSTEB&PASCCC.

**TABLE 6.1.2 HALF NODE DEAD**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	72	65	86
0.04	145	129	175
0.06	215	177	266
0.08	286	283	356
0.10	360	333	447
0.12	435	348	536
0.14	498	453	625
0.16	567	505	716
0.18	638	603	808

Table6.1.3 has shown the comparison among GSTEB, PASCCC and proposed TBGSTEB with respect all node dead time. It has been clearly shown that the number of rounds for all node dead in case of the proposed TBGSTEB are quite more than the GSTEB &PASCCC.

**TABLE 6.1.3 ALL DEAD NODE**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	79	87	109
0.04	156	177	185
0.06	233	267	273
0.08	311	350	372
0.10	392	459	466
0.12	472	505	553
0.14	539	645	653
0.16	618	713	727
0.18	699	823	825

Table 6.1.4 has shown the comparison among GSTEB,PASCCC and TBGSTEB with respect packets sent to BS. It has been clearly shown that the number packets sent to cluster head in case of the TBGSTEB are quite more than the GSTEB &PASCCC.

**TABLE 6.1.4 packet sent to cluster head**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	9.3133	34.7400	88.6733
0.04	18.2267	71.2933	177.7867
0.06	30.3867	104.0667	267.1800
0.08	32.0533	144.4533	357.7533
0.10	44.6533	174.0133	447.6267
0.12	50.8000	202.1733	536.9067
0.14	66.6667	244.7733	623.5667
0.16	69.1867	278.6333	714.7467
0.18	90.9000	315.1933	805.9333

Table 6.1.5 has shown the comparison among GSTEB, PASCCC and TBGSTEB with respect packets sent to BS. It has been clearly shown that the number packets sent to base station in case of the TBGSTEB are quite more than the GSTEB &PASCCC.

**TABLE 6.1.5. packet sent to base station**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	9.3133	2.6733	17.1933
0.04	18.2267	5.5000	33.7733
0.06	30.3867	7.9067	51.0267
0.08	32.0533	10.7533	68.7600
0.10	44.6533	13.4600	85.6333
0.12	50.8000	15.8000	102.9067
0.14	66.6667	19.0067	118.0533
0.16	69.1867	22.0733	136.2867
0.18	90.9000	24.2800	152.4067

Table 6.1.6 has shown the comparison among GSTEB, PASCCC and TBGSTEB with respect residual energy. It has been clearly shown that the residual energy in case of the TBGSTEB is quite more than the GSTEB &PASCCC.


**TABLE 6.1.6 residual energy**

INITIAL ENERGY	GSTEB	PASCCC	TBGSTEB
0.02	0.0056	0.0042	0.0058
0.04	0.0229	0.0170	0.0237
0.06	0.0505	0.0364	0.0534
0.08	0.0922	0.0708	0.0956
0.10	0.1437	0.1054	0.1496
0.12	0.2076	0.1446	0.2154
0.14	0.2786	0.2103	0.2920
0.16	0.3653	0.2716	0.3827
0.18	0.4566	0.3547	0.4858

**VII. ANALYSIS OF RESULTS**

**FIRST NODE DEAD TIME (STABLE PERIOD EVALUATION)**


The comparison among GSTEB,PASCCC and TBGSTEB with respect first node dead time. It has been clearly shown that the number of rounds for first node dead in case of the proposed are quite more than the GSTEB and PASCCC. It has clearly verified that the TBGSTEB is comparatively better than the both protocols.

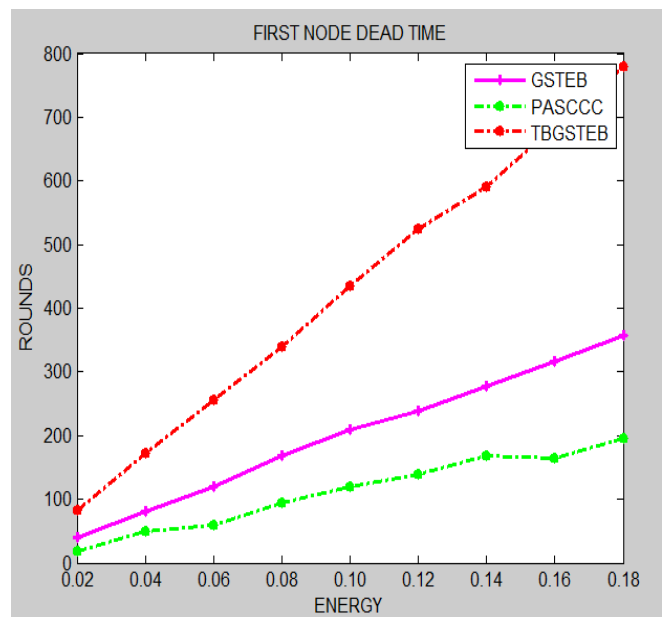

**FIG7.1. First Node Dead**


**HALF NODE DEAD TIME**

The comparison among GSTEB, PASCCC and TBGSTEB with respect half nodes dead time. It has been clearly shown that the number of rounds for half nodes dead in case of the TBGSTEB are quite more than the GSTEB and PASCCC. It has clearly verified that the TBGSTEB is comparatively better than the available protocols

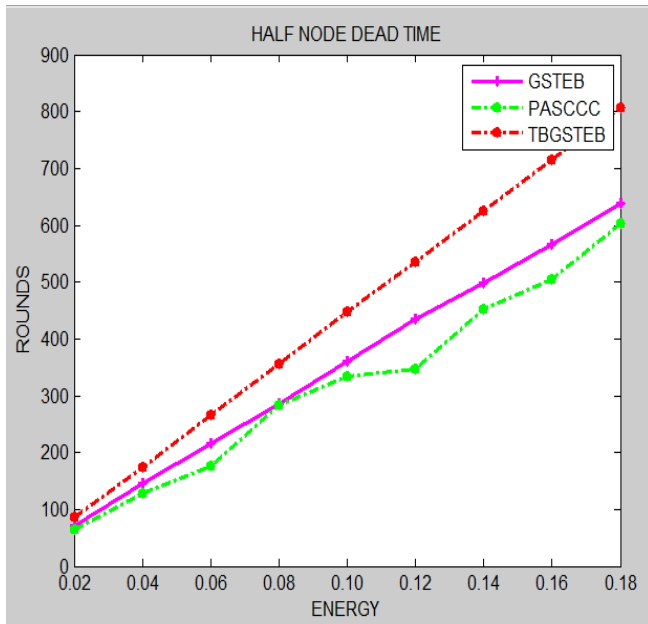


**FIG7.2. Half Node Dead**

**ALL DEAD NODE TIME i.e. NETWORK LIFETIME**  
 the comparison among GSTEB,PASCCC and TBGSTEB with respect all dead node time. It has been clearly shown that the number of rounds for all dead node in case of the TBGSTEB are quite more than the GSTEB and PASCCC. It has clearly verified that the TBGSTEB is comparatively better than the available protocols.

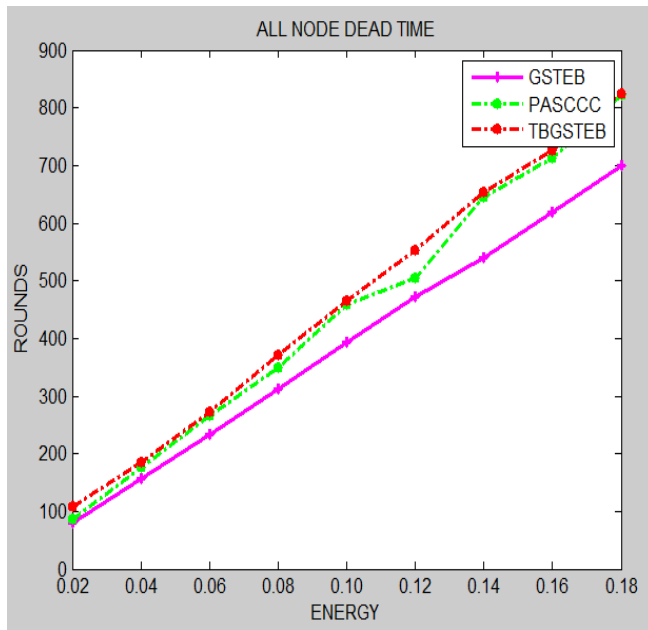


**FIG7.3. All Node Dead**

**PACKETS SENT TO BASE STATION (THROUGHPUT)**  
 The comparison among GSTEB,PASCCC and TBGSTEB with respect to number of packets transferred between the base stations to cluster head as well as between cluster head to member nodes in each round. It has been clearly shown that the packets with in case of the TBGSTEB are quite more than the GSTEB and PASCCC. It has clearly confirmed that the TBGSTEB is comparatively better than the available protocols.

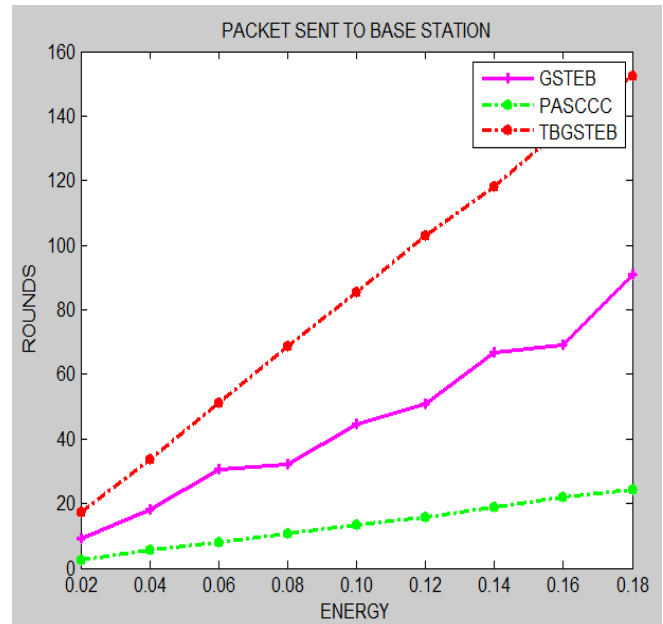

**FIG7.4. Packet sent to base station**

**PACKETS SENT TO CLUSTER HEAD**  
 The comparison among GSTEB,PASCCC and TBGSTEB with respect to number of packets transferred between the cluster head to base station as well as between base station to member nodes in each round. It has been clearly shown that the packets with in case of the TBGSTEB are quite more than the GSTEB and PASCCC. It has clearly confirmed that the TBGSTEB is comparatively better than the available protocols

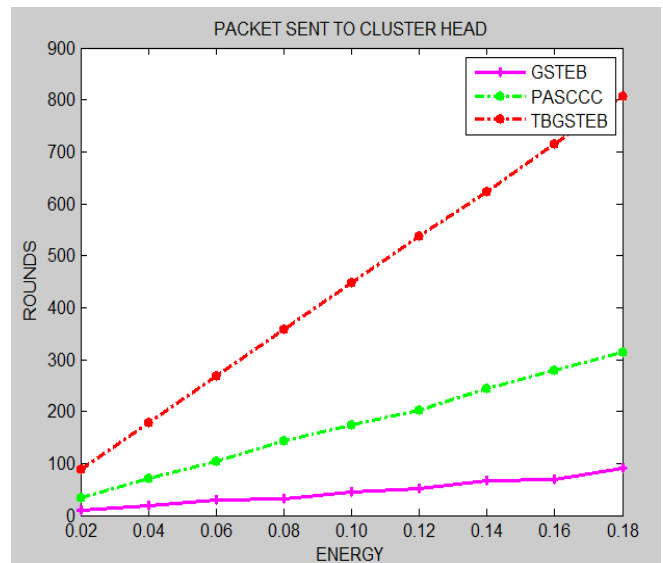

**FIG7.5. Packet sent to cluster head**

**REMAINING ENERGY ( RESIDUAL ENERGY)**  
 The comparison among GSTEB, PASCCC and TBGSTEB with respect to average remaining energy i.e. residual energy. It has been clearly shown that the residual energy in case of the TBGSTEB are quite more than the GSTEB,PASCCC. It has clearly confirmed that TBGSTEB is comparatively better than the existing protocol.

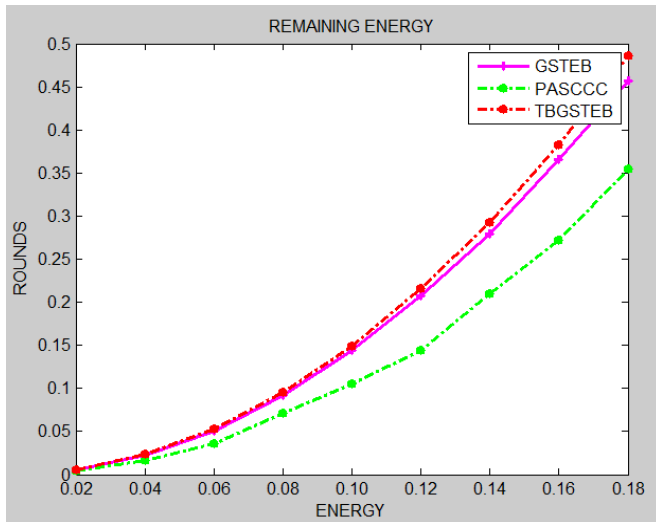


FIG7.6. Residual energy

### VIII. CONCLUSION AND FUTURE SCOPE

Many protocols has been planned thus far to enhance the energy potency more however still abundant sweetening may be done. GSTEB has shown quite vital results over the on the market WSNs protocols. however it's neglected several problems. so as to beat the constraints of the sooner work a brand new improved technique is planned during this analysis work. The planned technique has the flexibility to beat the restrictions of the GSTEB routing protocol by exploitation agglomeration and TABU search. The planned technique is intended and enforced within the MATLAB tool with the assistance of knowledge analysis tool case. Experiments has clearly shown that the planned technique outperforms over the on the market strategies. but this work has not take into account the utilization of 3D WSNs, thus in future work we have a tendency to willll extend the planned technique for 3D WSNs surroundings

### REFERENCES

1. Tang, ShaoJie, et al. "DAWN: energy economical information aggregation in WSN with mobile sinks." Quality of Service (IWQoS), 2010 eighteenth International Workshop on. IEEE, 2010.
2. Xibei, Jia, Zhang Huazhong, and Zhang Jingchen. "Research of knowledge aggregation routing protocol in wsn data-related applications." computing and data Technology (ICCSIT), 2010 third IEEE International Conference on. Vol. 1. IEEE, 2010.
3. Bista, Rabindra, Kim Hee-Dae, and Jae-Woo Yangtze River. "A new personal information aggregation theme for wireless device networks." laptop and data Technology (CIT), 2010 IEEE tenth International Conference on. IEEE, 2010.
4. Xiao, Haitao, et al. "The health observation system supported distributed information aggregation for WSN employed in bridge identification." SICE Annual Conference 2010, Proceedings of. IEEE, 2010.
5. Zanjani, Motahareh Bahrami, Reza Monsefi, and Arash Boustani. "Energy efficient/highly secure information aggregation technique victimisation tree-structured orthogonal codes for Wireless device Networks." code Technology and Engineering (ICSTE), 2010 second International Conference on. Vol. 2. IEEE, 2010.
6. Hasenfratz, David, et al. "Analysis, comparison, and improvement of routing protocols for energy harvest wireless device networks." device Networks, Ubiquitous, and Trustworthy Computing (SUTC), 2010 IEEE International Conference on. IEEE, 2010.
7. Raju, G. T., et al. "Wireless device network time period improvement." Advances in Recent Technologies in Communication and Computing (ARTCom 2011), third International Conference on. IET, 2011.
8. Zhu, Liehuang, and Meng Li. "An energy economical and integrity-preserving aggregation protocol in wireless device networks."

- Performance Computing and Communications Conference (IPCCC), 2011 IEEE thirtieth International. IEEE, 2011.
9. Nie, Pin, and Bo Li. "A cluster-based information aggregation design in WSN for structural health observation." Wireless Communications and Mobile Computing Conference (IWCMC), 2011 seventh International. IEEE, 2011.
10. Chu, Hung-Chi, et al. "Design AND implementation an energy-aware routing mechanism for star wireless device networks." High Performance Computing and Communications (HPCC), 2011 IEEE thirteenth International Conference on. IEEE, 2011.
11. Mathapati, Basavaraj S., Siddarama R. Patil, and V. D. Mytri. "Energy economical Reliable information Aggregation Technique for Wireless device Networks."Computing Sciences (ICCS), 2012 International Conference on. IEEE, 2012.
12. Tamilselvan, G. M., and S. Kiruthika. "An energy economical information aggregation primarily based medium access management protocol victimisation centre at nearest supply approach for device networks during a lattice topology." Computing, Communication and Applications (ICCCA), 2012 International Conference on. IEEE, 2012.
13. Eu, Zhi Ang, and Hwee-Pink Tan. "Adaptive expedient routing protocol for energy harvest wireless device networks." Communications (ICC), 2012 IEEE International Conference on. IEEE, 2012.
14. Mantri, Dnyaneshwar, Neeli Rashmi Prasad, and Ramjee Prasad. "BHCDA: information measure economical heterogeneousness aware cluster primarily based information aggregation for Wireless device Network." Advances in Computing, Communications and science (ICACCI), 2013 International Conference on. IEEE, 2013.
15. Said, Adel Mounir Sareh, et al. "Dynamic aggregation protocol for wireless device networks." Advanced info Networking and Applications (AINA), 2013 IEEE twenty seventh International Conference on. IEEE, 2013.
16. Wu, Yin, and Wenbo Liu. "Routing protocol supported genetic algorithmic program for energy harvesting-wireless device networks." IET Wireless device Systems3.2 (2013): 112-118.
17. Mantri, Dnyaneshwar, Neeli R. Prasad, and Ramjee Prasad. "Grouping of clusters for economical information aggregation (GCEDA) in wireless device network."Advance Computing Conference (IACC), 2013 IEEE third International. IEEE, 2013.
18. Hooman Ghaffarzadeh and Ali Doustmohammadi , "Two-phase information traffic improvement of wireless device networks for prolonging network lifetime", 2013.
19. Han, Zhao, Jie Wu, Jie Zhang, Liefeng Liu, and Kaiyun Tian. "A General Self-Organized Tree-Based Energy-Balance Routing Protocol for Wireless device Network." (2014)

**Er. Harsh Deep**, Computer Science, diploma/B-tech /M-tech (Pursuing), Membership-CSI

**Prof. Varsha Verma**, Computer Science, B-tech/M-tech, Research-Wireless Sensor Network, Publications- IEEE - 01, International Journal - 6, National – 5, International