

# Investigation of Indoor Air Quality Characteristics in Automotive Compartments

Ramesh Kumar A, Jayabal S, Ramkumar P, Daniel Lawrence I

*Abstract: Indoor air quality is an indicator level of human comfort confined with thermal conditions. This study mainly focuses on to predict the indoor air quality in inside car cabin at the time of traffic. Three different car has been used were SUV, sedan and hatchback types, mainly chosen is to differentiate the vehicle inside space diversely. To measure PM 2.5, PM 10, CO<sub>2</sub>, temperature and RH were recorded by using IAQ monitor with Data Acquisition (DAQ). At the time of measurement, four different cases are concern is window open (WO), window half open (WHO), window close (WC) and air conditioning with window close (ACWC). SUV achieved a better low temperature of 30°C in ACWC and hatchback has a more temperature of 42.8°C in WC due to vehicle space difference and severe concentrations of CO<sub>2</sub> and particulate matter. RH are increased by the way of temperature get increased in indoor cabin. Hatchback indoor cabin rapidly generate CO<sub>2</sub> emission, because indoor spaces is congested compared to other two cars. Windows and indoor spaces more in SUV, so outdoor pollutant easily get exposure to indoor pollutant while in the cases of window open (WO) and window half open (WHO).*

*Index Terms: automotive, car cabin, IAQ, pollutant.*

## I. INTRODUCTION

Human comfort of indoor occupied humans in vehicle has become more important due to increasing necessary of comfortable living space. Indoor air quality is a parameter of physical factors to determine the human comfort. Typically commuters spend 5.5% of time spend inside a car cabin, it could expose to air quality. Comparatively to the building, it seems only few researchers are contribute in the field of IAQ, especially in an inside car cabin environment. This study proposes the important factor about IAQ by comparative study of three different type of car cabin.

Bin Xu et al., reviewed more than 90 studies across over 10 country and stated that air recirculation with high efficiency air filter is the most effective compare to lower air pollutant concentrations [1]. Joanna Faber et al., reviewed that synthetic material increase more VOCs in new vehicle indirectly proportional to their vehicle age [2]. Anna Barbara Janica et al., indicated that need of research continuation in material science toxicology aspect due to

**Revised Version Manuscript Received on December 15, 2017.**

**Ramesh Kumar A**, Department of Mechanical Engineering, Sona College of Technology, Salem (Tamil Nadu), India. E-mail: [rameshcad@outlook.com](mailto:rameshcad@outlook.com)

**Jayabal S**, Department of Mechanical Engineering, A. C. Government College of Engineering and Technology, Karaikudi (Tamil Nadu), India. E-mail: [jayabalsubbaian@gmail.com](mailto:jayabalsubbaian@gmail.com)

**Ramkumar P**, Department of Mechanical Engineering, CMS College of Engineering and Technology, Coimbatore (Tamil Nadu), India. E-mail: [park.ram555@gmail.com](mailto:park.ram555@gmail.com)

**Daniel Lawrence I**, Department of Mechanical Engineering, Anna University Regional Campus, Madurai (Tamil Nadu), India. E-mail: [danielawerence@gmail.com](mailto:danielawerence@gmail.com)

VOCs and benzene concentration exposure is not safety in high class of vehicle. Recent emerging of advanced materials in textiles, plastics, foam, solvents in glues, paints, lacquers and car cosmetics are internal sources of pollution could possible to affect the air quality [3].

Joanna Faber et al., calculated total VOCs concentration from nine new vehicles is ranged from 1.5 mg/m<sup>3</sup> to 2.1 mg/m<sup>3</sup> and 200 different organic compounds were detected in vehicles [4]. Anna Golda Kopek et al., concluded that total no of 330 VOCs were identified inside the four new tested vehicle by using thermal desorption and GCMS/FID [5]. L.D.Knibbs et al., estimate the pollutant exposure inside the vehicle cabin in six passenger car at three ranging speeds and four different ventilation settings. Proposed that air infiltration into the cabin was between 1 and 33.1 air changes per hour (ACH) at 60 km/hr speed and between 2.6 and 47.3 ACH at 110 km/hr [6]. M. Ozgun Korukcu et al., investigated that in the heating period CO<sub>2</sub> emissions for two sedentary persons have 1.24 times greater than that of one sedentary persons [7].

M.Kilic et al., recommended that an advanced climate control system may to reduce the energy usage for the cooling of a vehicle cabin [8]. Joanna Faber et al., examined five new vehicles and stated that concentrations of identical VOCs and three main group of compounds (aliphatic, aromatic and cycloalkanes), as well as 18 target compounds and 10 main hydrocarbons are presented [9]. Jan Pokorny et al., developed a new computational software Virtual Testing Stand for the transient prediction of environment and heat load in car cabin [10]. Daniel Muller et al., indoor car quality may be improved by windows opening, or accurate usage of fans or automated air conditioning systems [11].

L. Abi-Eser et al., conducted experiments on six car with different ages to measure PM<sub>2.5</sub> and carbon monoxide (CO) in both inside and outside of the vehicle with different ventilation mode, one window half opened, fresh air intake and air recirculation inside cabin on commercial residential area and highway. Concluded that temperature and humidity difference also affected CO IO ratios [12]. Yulong Yan et al., studied VOCs, carbon mono-oxide (CO) and PM10 in six different car park and estimated that  $3.73 \times 10^{-4}$  and  $5.60 \times 10^{-6}$ , respectively cancer risks for car park staff and casual parking users, indicating definite and possible risks [13]. M.J.Mendell et al., proposed that reducing school attendance



# Investigation of Indoor Air Quality Characteristics in Automotive Compartments

**Table I Outdoor Measured Parameter of Tested Cars**


S. No	Car Type	PM <sub>2.5</sub> (µg/m <sup>3</sup> )		PM <sub>10</sub> (µg/m <sup>3</sup> )		CO <sub>2</sub> (ppm)		Temperature (°C)		RH (%)	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1	SUV	90.2	113.3	218.5	269.1	379	523	30.7	45.1	18.4	55.9
2	Sedan	91.3	116.8	202.4	241.5	380	456	31.1	44.1	20.8	56.4
3	Hatchback	94.6	117.7	188.7	246.1	382	659	30	45.8	17.9	51.8

Due to present higher indoor concentrations of NO<sub>2</sub> and low ventilation rates decreased the performance of students in indoor environments of school [14]. You Ke wei et al., predicted VOCs for one new vehicle and two old vehicle is 4940 µg/m<sup>3</sup>, 1240 µg/m<sup>3</sup> and 132 µg/m<sup>3</sup> by using the Thermodesorber-Gas Chromatograph/Mass Spectrometer (TD-GC/MS) [15]. P.Thirumal et al., Gray Relational Analysis (GRA) and Response Surface Methodology (RSM) optimization techniques are used in indoor air quality characteristics with varying human load, fresh air supply and air velocity [16]. Andy T. Chan et al., in fresh air ventilation mode the indoor–outdoor air quality (IO) ratios is approximately 0.5 to 3 and NO concentration varying from 0.5 to 5 for naturally ventilated were obtained at travel from highway to rural area in light good vehicle [17].

## II. EXPERIMENTAL PROCEDURE

### A. Experiment Environment

All the three tested cars are measured in identical place, which is located nearby moderate traffic state road, karaikudi (latitude 10.09052 ° N, longitude 78.78145 ° E), state of Tamilnadu, India, aerial view of experiment location in Fig. 1.

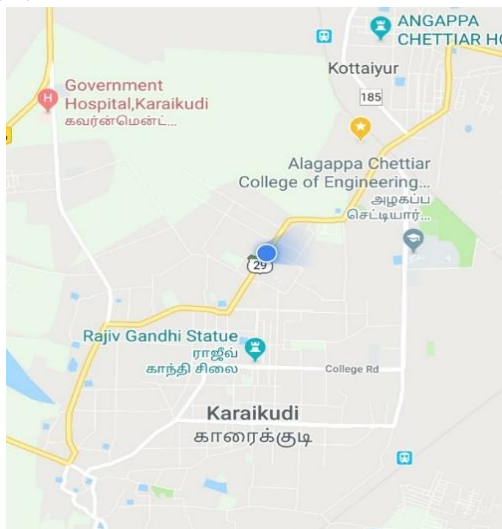

**Fig. 1 Aerial View of Experiment Location**

The vehicles are simultaneously moving on the road nearby tested car approximately 2100/hr. The experiment was taken for three days successively with each tested car per day. CO<sub>2</sub> meter with humidity and thermometer of Extech instruments is used for measuring outdoor parameters equivalent to indoor time represented in Table I.

### B. Experimental Equipment's

In this research there are three type of car is carried out

SUV, sedan and hatchback, which is shown in Fig. 2. Mainly chosen these cars to differentiate vehicle indoor space drastically. The specifications of three cars were mentioned in Table II. To measure indoor parameters are PM<sub>2.5</sub>, PM<sub>10</sub>, CO<sub>2</sub>, temperature and relative humidity by using IAQ monitor of Rave innovations. Technical details of IAQ monitor is specified in Table III. IAQ monitor with Data Acquisition system (DAQ) in Fig. 3.



**(a) SUV**



**(b) Sedan**



**(c) Hatchback**

**Fig. 2 Experimental Tested Cars**



**Table II Specifications of Tested Cars**

S. No	Specifications	SUV	Sedan	Hatchback
1	Length (mm)	4430	4830	3690
2	Width (mm)	1817	1820	1665
3	Height (mm)	1975	1465	1485
4	Seating Capacity	7	5	5
5	Displacement (cc)	2523	2354	1405
6	Fuel Type	Diesel	Petrol	Diesel

**C. Methodology**

The period of testing the car’s front side is placed to the direction of the sun azimuth angle is 56.6° and elevation angle is 189.56°. Before done the experiment, cars are soaked to 15 minutes with all the door opening for dilute indoor pollutant to outdoor pollutant. Each and every trail the foresaid method was followed. The measurement was taken in the middle of vehicle space in all the conditions and tested time is 20 min per trail. Two sedentary persons are consistent respectively in all experiments as a driver and back left side passenger. Engine is running in all cases, it will helpful to track down the air quality in indoor vehicle at traffic time. For the air conditioning situation the fresh air supply is established and full fan speed is introduced instead of recirculation mode.

The following cases are followed for each tested car:

- 1) Case 1: Window Open (WO)
- 2) Case 2: Window Half Open (WHO)
- 3) Case 3: Window Close (WC)
- 4) Case 4: Air Conditioning with Window Close (ACWC)

**Table III Technical Details of IAQ Monitor**

S. No	IAQ3007R	Specifications		
1	Principle	Light Scattering for PM <sub>10</sub> and PM <sub>2.5</sub> NDIR for CO <sub>2</sub>		
2	Range	PM <sub>10</sub>	PM <sub>2.5</sub>	CO <sub>2</sub>
		0 – 1000 µg/m <sup>3</sup>	0 – 700 µg/m <sup>3</sup>	400 – 2500 ppm
3	Resolution	PM <sub>10</sub>	PM <sub>2.5</sub>	CO <sub>2</sub>
		1 µg/m <sup>3</sup>	1 µg/m <sup>3</sup>	10 ppm
4	Temperature	0 – 50 °C		
5	Relative humidity	0 – 95 %		




**Fig. 3 IAQ Monitor with DAQ**

**III. RESULTS AND DISCUSSION**

**A. Effect of Temperature**


As per guidelines of ASHRAE Standard 55-2013, human comfort temperature lies between 20°C to 28°C. From Fig. 4 represents the mean value of temperatures for all the cases. In Table IV, Contrary to the tested cars, SUV achieved a better low temperature of 30°C in ACWC and hatchback has a more temperature of 42.8°C in WC due to vehicle space difference and severe concentrations of CO<sub>2</sub> and particulate matter. The maximum obtained high temperature difference was approximately 5°C between SUV and hatchback in WO case.

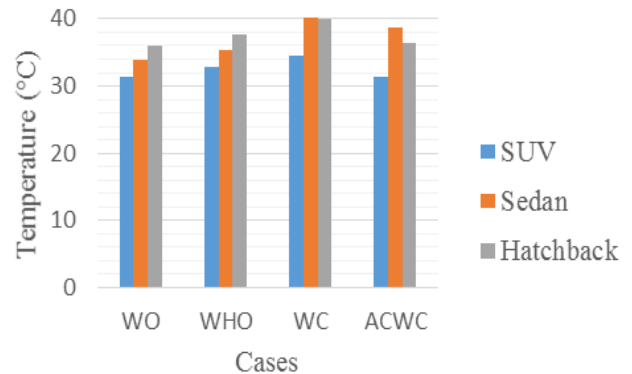

**Fig. 4 Average Temperatures for all the Cases**

**B. Effect of RH**

ASHRAE Standards recommends that less than 65 % of relative humidity in occupied spaces in summer. Average results of RH for the three car type represents in Fig. 5. WC of SUV took a maximum RH of 70%, compare to other two cars it feel too hot. Very low humidity of 35% is obtained in ACWC for hatchback. RH are increased by the way of temperature get increased in indoor cabin.

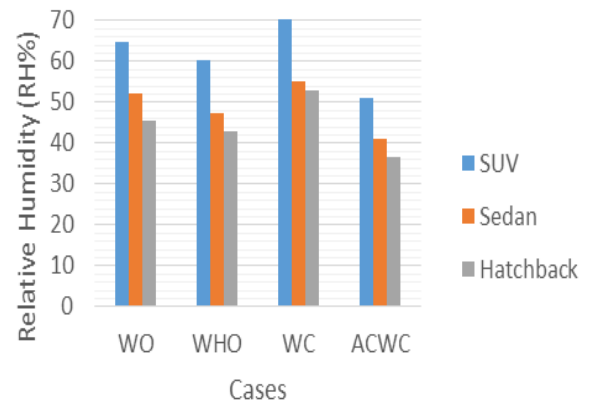

**Fig. 5 Average RH for all the cases**

**C. Effect of CO<sub>2</sub>**

ASHRAE standard commended of CO<sub>2</sub> for indoor spaces is 1000 ppm. In all the cases of CO<sub>2</sub> emission is gradually increased with indirectly to vehicle spaces. Mainly in WC case are traversed above 1000 ppm in a particular time as SUV in 7 min of 1145 ppm, sedan in 6 min of 1054 ppm and hatchback in 4 min of 1134 ppm.



## Investigation of Indoor Air Quality Characteristics in Automotive Compartments

Therefore hatchback compartment rapidly generate CO<sub>2</sub> emission, Because indoor spaces is congested compared to other two cars. Fig. 6 represents the average CO<sub>2</sub> emission of tested cars. Air conditioned closed cabin achieved best thermal comfort with dilution of carbon dioxide.

### D. Effect of PM<sub>2.5</sub>

Compare to the SUV and sedan, hatchback PM<sub>2.5</sub> has low concentration is in the range of 83.6  $\mu\text{g}/\text{m}^3$  to 113.3  $\mu\text{g}/\text{m}^3$ . Fig.7 represents the average PM<sub>2.5</sub> of all tested cars. The maximum obtained PM<sub>2.5</sub> concentration in WHO is 138.6  $\mu\text{g}/\text{m}^3$  in SUV.

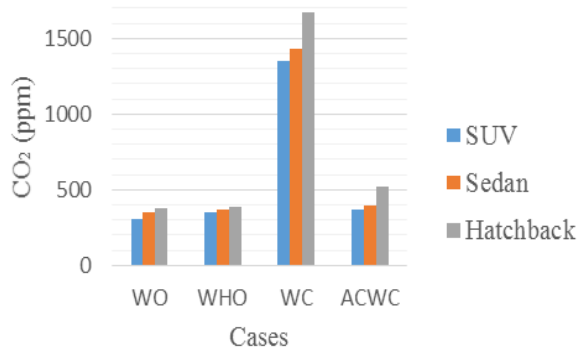


Fig. 6 Average CO<sub>2</sub> Emission for all the Cases

Table IV Maximum and Minimum of Measured IAQ Parameters

IAQ parameters	Cases	SUV	Sedan	Hatch-back		
Temperature (°C)	WO	Min	30.8	33.4	35.4	
		Max	31.8	34.3	36.5	
	WH O	Min	32.3	34	36.6	
		Max	33.6	36.6	39.1	
	WC	Min	33	37.2	36.7	
		Max	35.4	42.7	42.8	
	AC WC	Min	30	38	34.3	
		Max	32.8	40.4	38.9	
	Relative Humidity (%)	WO	Min	64	49	45
			Max	67	55	46
WH O		Min	59	43	41	
		Max	62	53	44	
WC		Min	65	48	43	
		Max	73	57	57	
AC WC		Min	46	37	35	
		Max	55	43	39	
CO <sub>2</sub> (ppm)		WO	Min	234	308	331
			Max	361	391	452
	WH O	Min	264	316	349	
		Max	437	438	410	
	WC	Min	213	279	354	
		Max	2080	2080	2080	
	AC WC	Min	337	287	428	
		Max	427	463	647	
	PM <sub>2.5</sub> ( $\mu\text{g}/\text{m}^3$ )	WO	Min	100	100.1	83.6
			Max	118.8	130.9	113.3
WH O		Min	106.7	86.9	89.1	
		Max	138.6	116.6	101.2	
WC		Min	96.8	85.8	88	
		Max	112.2	111.1	106.7	

PM <sub>10</sub> ( $\mu\text{g}/\text{m}^3$ )	AC WC	Min	95.7	69.3	85.8
		Max	113.3	86.9	110
	WO	Min	209.3	209.3	174.8
		Max	280.6	253	236.9
	WH O	Min	227.7	181.7	184
		Max	296.7	243.8	211.6
	WC	Min	209.3	179.4	184
		Max	236.9	232.3	223.1
	AC WC	Min	200.1	144.9	179.4
		Max	236.9	181.7	230

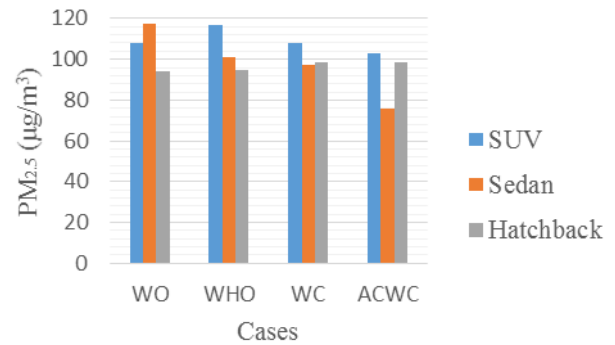


Fig. 7 Average PM<sub>2.5</sub> for all the cases

### E. Effect of PM<sub>10</sub>

The particulate matter of PM<sub>10</sub> is high in all cases except WO. The maximum 247  $\mu\text{g}/\text{m}^3$  of high concentration is obtained in WO. Fig. 8 represents the average PM<sub>10</sub> for all the cases. Windows and indoor spaces more in SUV, so outdoor pollutant easily get exposure to indoor pollutant while in the cases of WO and WHO.

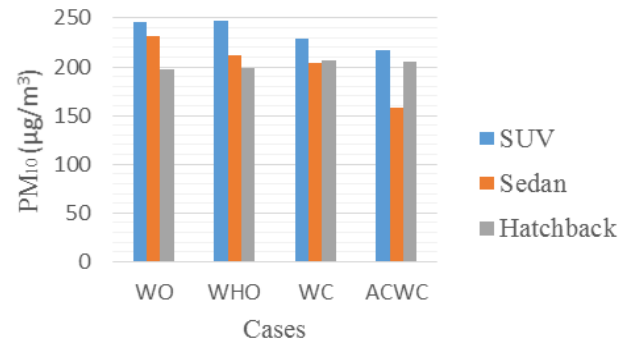


Fig. 8 Average PM<sub>10</sub> for all the cases

## IV. CONCLUSION

Indoor environmental quality is a good indicator of the performance of car cabin, being linked to the comfort and health conditions. This study mainly focuses on to predict the indoor air quality in inside car cabin at the time of traffic. To measure PM 2.5, PM 10, CO<sub>2</sub>, temperature and RH were recorded by using IAQ monitor with Data Acquisition (DAQ). At the time of measurement, four different cases are concern is window open, window half open, window fully close and air conditioning with window fully close for all cars. SUV achieved a better low temperature of 30°C in ACWC.



And hatchback has a more temperature of 42.8°C in WC due to vehicle space difference and severe concentrations of CO<sub>2</sub> and particulate matter. RH are increased by the way of temperature get increased in indoor cabin. Hatchback indoor cabin rapidly generate CO<sub>2</sub> emission, because the indoor spaces is congested compared to other two cars. Windows and indoor spaces more in SUV, so outdoor pollutant easily get exposure to indoor pollutant while in the cases of WO and WHO.

### ACKNOWLEDGMENT

This research article is sponsored by TEQIP II Research and Development Fund.

### REFERENCES

1. Bin Xu, Xiaokai Chen, and Jianyi Xiong, "Air quality inside motor vehicles' cabins: A review", *Indoor and Built Environment*, Oct. 2016, pp. 1-14.
2. Joanna Faber, and Krzysztof Brodzik, "Air quality inside passenger cars", *AIMS Environmental Science*, vol. 4(1), Feb. 2017, pp. 112-133.
3. Anna Barbara Janicka, Marek Reksa, and Agnieszka Sobianowska Turek, "The impact of car vehicle class on volatile organic compounds (voc's) concentration in microatmosphere of car cabin", *Journal of KONES Powertrain and Transport*, vol. 17, 2010, pp. 207-212.
4. Joanna Faber, Krzysztof Brodzik, Anna Golda-Kopek, Damian Lomankiewicz, Jan Nowak and Antoni Swiatek, "Comparison of Air Pollution by VOCs Inside the Cabins of New Vehicles", *Environment and Natural Resources Research*, vol. 4, Jun 2014, pp. 155-165
5. Anna Golda-Kopek, Joanna Faber, Damian Lomankiewicz, and Krzysztof Brodzik, "Investigation of volatile organic compounds in the cabin air of new cars", *Internal combustion engines*, vol. R 51 (2), 2012, pp. 39-48
6. L. D. Knibbs, R. J. de Dear, and S. E. Atkinson, "Field study of air change and flow rate in six automobiles", *Indoor Air*, vol. 19, 2009, pp. 303-313.
7. M. Ozgun Korukcu, and Muhsin Kilic, "Transient effects of heater on CO<sub>2</sub> emissions in an automobile", *Scientific research and essays*, vol. 6(31), Dec 2011, pp. 6465-6474.
8. M. Kilic, and S. M. Akyol, "Experimental investigation of thermal comfort and air quality in an automobile cabin during the cooling period", *Heat Mass Transfer*, vol. 48, Feb 2012, pp. 375-1384.
9. Joanna Faber, Krzysztof Brodzik, Anna Golda-Kopek, and Damian Lomankiewicz, "Air Pollution in new vehicles as a result of VOC emissions from interior materials", *Polish Journal of Environmental Studies*, vol. 22, 2013, pp. 1701-1709.
10. Jan Pokorny, Jan Fiser, and Miroslav Jicha, "Virtual Testing Stand for evaluation of car cabin indoor environment", *Advances in engineering software*, vol. 76, Jun 2014, pp. 48-55.
11. Daniel Muller, Doris Klingelhofer, Stefanie Uibel and David A Groneberg, "Car indoor air pollution - analysis of potential sources", *Journal of Occupational Medicine and Toxicology*, Dec 2011, pp. 1-7
12. L. Abi-Esber, and M. El-Fadel, "Indoor to outdoor air quality associations with self-pollution implications inside passenger car cabins", *Atmospheric Environment*, vol. 81, Dec 2013, pp. 450-463
13. Yulong Yan, Qing He, Qi Song, Lili Guo, Qiusheng He, and Xinming Wang, "Exposure to hazardous air pollutants in underground car parks in Guangzhou, China", *Air quality, Atmosphere and health*, vol. 10, Jun 2017, pp. 555-563.
14. M. J. Mendell, and G. A. Heath, "Do indoor pollutants and thermal conditions in schools influence student performance? A critical review of the literature", *Indoor Air*, vol. 15, Feb 2005, pp. 27-52.
15. You Ke-wei, Ge Yun-shan, Hu Bin, Ning Zhan-wu, Zhao Shou-tang, Zhang Yan-ni, and Xie Peng, "Measurement of in-vehicle volatile organic compounds under static conditions", *Journal of Environmental Sciences*, vol. 19, 2007, pp. 1208-1213.
16. P. Thirumal, K. S. Amirthagadeswaran and S. Jayabal, "Optimization of IAQ characteristics of an air-conditioned car using GRA and RSM", *Journal of mechanical science and technology*, vol. 28 (5), May 2014, pp. 1899-1907.
17. Andy T. Chan, and Michael W. Chung, "Indoor-outdoor air quality relationships in vehicle: effect of driving environment and ventilation modes", *Atmospheric Environment*, vol. 37, Sep 2003, pp. 3795-3808.



**Ramesh Kumar A**, is an Assistant Professor in the Department of Mechanical Engineering at the Sona college of Technology, Salem, Tamilnadu, India. He completed his Master degree in A. C. Government College of Engineering and Technology, Karaikudi, Tamilnadu, India and bachelor degree in St.Peters Engineering College Avadi, Tamilnadu, India. His area of interest is Indoor Air Quality, Human thermal comfort and Computational Fluid Dynamics.



**Jayabal S**, is an Assistant Professor (Senior Grade) in the Department of Mechanical Engineering at the A. C. Government College of Engineering and Technology, Karaikudi, Tamilnadu, India. He has produced six research scholars and currently guiding seven research scholars in the field of natural fiber-polymer composites and thermal engineering. His areas of interest include composite materials, finite element analysis, Indoor Air Quality, optimization methods, chatter vibration and artificial intelligence techniques. He has published 83 research articles in peer reviewed journals and 80 research articles in National and International conferences.



Computational Fluid Dynamics.

**Ramkumar P**, is an Assistant Professor in the Department of Mechanical Engineering at CMS College of Engineering and Technology, Coimbatore, Tamilnadu, India. He completed his Master degree in A.C.Government college of Engineering and Technology, Karaikudi, Tamilnadu, India. And did his Bachelor Degree in Park College of Technology, Coimbatore, Tamilnadu, India. His research area is Indoor Air Quality, Heat Ventilation and Air Conditioning, Thermal Comfort in Automotive and



**Daniel Lawrence I**, is an Teaching Fellow in the Department of Mechanical Engineering at Anna University Regional Campus, Madurai, Tamilnadu, India. He completed his Master degree in Anna University Regional Campus, Madurai, Tamilnadu, India and did his bachelor degree in A.C.Government college of Engineering and Technology, Karaikudi, Tamilnadu, India. His research area is Indoor Air Quality, Heat Ventilation and Air Conditioning, Thermal Comfort in various environments.