

# Effect of Fiber Reinforced Polymer (FRP) in Automotive Manufacturing Industries in the Perspective of Sustainability

Ahrar Ahmad, Vilas B. Shinde

**Abstract:** Currently, there has been a fast development in research and advancement in the natural fiber composite (NFC) zone. Intrigue is right because of the benefits of these materials contrasted with others, for example, synthetic fiber composites, including low ecological effect and ease and boost their potential over an extensive variety of applications. Additionally, benefits incorporate low density, low machine wear and inviting crack, with the end goal that their broken edges are milder than for synthetic fiber composites. Much exertion has gone into expanding their mechanical execution to broaden the abilities and utilization of this collection of materials.

**Keywords:** Biodegradability, natural fibers, sustainability, reinforcing fibers

## I. INTRODUCTION

The automotive industry is one of the most significant critical global businesses. As we move into the 21st century, it is clear that global-ecological subjects will have a gradually significant effect on the automotive industry's future development and sustainability. Innovative lightweight materials, for example, plastics or composites, should overwhelm the present metal-based framework. Consolidating configuration highlights to encourage end-of-life reusing and recuperation is additionally critical. The pattern will be towards fewer materials and parts in vehicle configuration, joined readily of dismantling. Mono-material development can make vehicle plan with enhanced recyclability and also decreased quantities of parts and weight.[1] These days, energy proficiency in the car industry has turned into the principle subject since the engine emissions have perceived as a notable wellspring of air contamination. In order to increase the productivity of the fuel, many actions have been attempted by numerous analysts to supplement the strong metallic material of the car parts with lighter materials, for example, aluminum or magnesium combination, ultra-high quality steel or fiber reinforced plastic (FRP) complexes. Mainly, the glass fiber reinforced plastic (GFRP) and the carbon fiber reinforced plastic (CFRP) composites have acquired much consideration for car structures because of their high specific stiffness, unusually

high quality and high damping capacity contrasted with the usual metallic materials. By using the above methods, the weight of the car parts can be reduced with no degradation of mechanical properties. Likewise, many endeavors of FRP applications in the automotive part have been attempted not just for the outside parts of a vehicle yet also for the inside parts which manage overwhelming burdens amid different driving conditions[2]

### A. Biodegradability methods

A believable result for waste-disposal issues is utilizing biodegradable polymers strengthened by natural-fibers rather than conventional petroleum-derived plastics. Direct sunshine can soften the covalent bonds up organic polymers. It inclines to cause yellowing, color blurring, weight reduction, surface roughening, mechanical property decay and embrittlement with more diminishment in wetter condition. In the wake of weathering periods, given the degradation of fibers and matrix, the tensile strength of a composite is diminished.[3]

## II. STANDARD FILAMENTS

Standard filaments are predictable strands or discrete drawn-out pieces, like bits of string and these can be spun into filaments, string, They can be utilized as a few composite materials. They may in like way be tangled into sheets to make things, for example, paper or felt. We can have two kinds of filament: natural fiber and manufactured by human or artificial filament. Total strings, which start from standard are isolated around three standard bases; creatures, vegetables, and natural resources. In addition, they are appointed regular strands as appeared in Figure.[4]

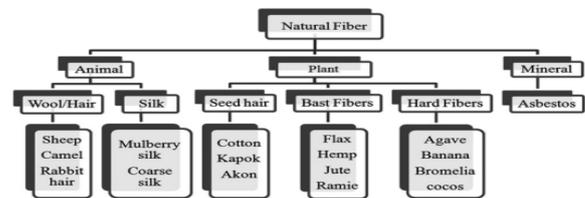


Figure 1. resource of standard filaments [4]

### A. The composition of Chemical used

Herbs filaments are made out of starch corresponding blend, and creature filaments are made out of protein. Pectin is an aggregate brand for heteropolysaccharides, and it gives adaptability to herbs. Waxes make up the last some portion of filaments, and they comprise of various sorts of an intoxicant.[4]

Manuscript published on 28 February 2019.

\* Correspondence Author (s)

Ahrar Ahmad, Department of Mechanical Engineering,, Datta Meghe College of Engineering Airoli, Navi Mumbai, India (Email: ahrar.ahmed@mhssce.ac.in)

Dr.Sangeetha Yalamanchili, Department of Mechanical Engineering,, Datta Meghe College of Engineering Airoli, Navi Mumbai , India (Email: vbs\_life@rediffmail.com)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <https://creativecommons.org/licenses/by-nc-nd/4.0/>



### B. Chemical Treatments

Standard fibers are not thoroughly without charge of issues even though they have a similar favorable position of minimal effort and low thickness over different fibers. As regular strands have solid polar qualities and may cause an issue of contradiction in holding with the more significant part of the polymer grids, surface concoction treatment forms increment the price of natural fibers yet may upgrade the quality of interface attachment between the fiber and grid, and furthermore diminish the wetness ingestion of strands. Along these lines, synthetic medicines could be measured as altering the properties of standard filaments.[4]

### C. Variability

Fluctuation of regular filament causes variations in mechanical properties of the filament, which makes issues in the plan or excellence confirmation part of the standard filaments fortified compound. Because of the vast common variety in measured mechanical properties of flax filament, they are frequently utilized just for second rate compound applications. Different cross-sectional distances across filament might prompt a variety in the mechanical properties of standard filaments.

Some elements, which source variations in the superiority and dimension of conventional filament: numerical area of the ground, trim assortment, reap seed excellence and thickness, mud superiority, manure utilized, reaping time, and atmosphere what more, weather conditions are. Some different varieties like extraction handling techniques, harm cured amid taking care of and preparing, and the distinctions in drying procedures can instigate and promote variety at last utilize product. Variety in cost is likewise found alongside changeability like natural fibers of the plants at the season of their collections. The ideal approach to overcome these disadvantages is to develop many sorts of fibers in various districts to keep away from nearby deficiencies.[4]

### D. The Use of NFC in Automobiles

Starting late, standard filaments, e.g., flax jute, sisal, and hemp have been cutting edge advancement and began to empty their recklessness. Automobile companies have inspired by new bio-materials, which can be somewhat environmental for the overall modern examples of the natural defense and progression of sensible development. The use of conventional filament composites has extended and is getting tendency over glass filament and carbon filament in light of their negligible exertion and small mass qualities. European-based standard filaments composite rots, for instance, Draxlmaier Group and Faurecia supply car inside parts, for instance, headliners, side what is progressive, back dividers, arrange backs, and back deck plate to GM, Volvo, and Audi. Figure 2 represents a couple of areas, which can be made using conventional fiber blends.[4]

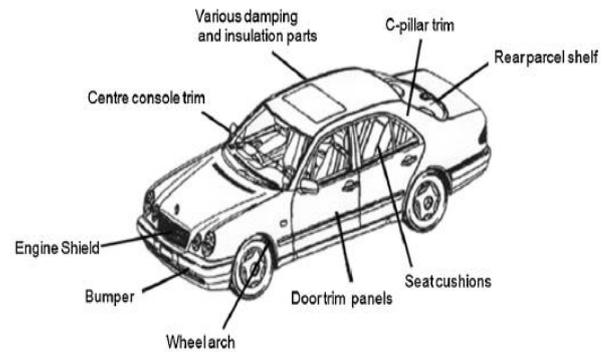


Figure 2. Use of NFC in automobile[4]

## III. STANDARD FILAMENT FOR THE AUTOMOTIVE MANUFACTURER & RESULTS

The carmaker is one of the principal divisions taking the public, natural, and legislative requirements and commitments into contemplations. Innovative work in autos field in European nations and also others are upgraded utilizing conventional filaments as packing materials in plastic items. That seems to be; given the massive necessitate diminishing the greatness of the conveyed vehicles that is imperative to lessen the petroleum use in one hand and to accomplish improved ecological execution by reducing CO2 emanation on another side. The novel bio-based business vehicles are increasingly conservative and lighter alternatives for shoppers. These types of vehicles are moneyed with an inside component that use standard filaments (for example sisal, hemp, etc) as fortifying specialists for ecological resources to be treated the soil or reused when wanted (toward the finish of its existence cycle). Such execution of natural fibers as strengthening specialists is viewed as useful in automotive applications as they are utilized as a part of segments that do not include an introduction to substantial burdens, but rather to have a decent dimensional steadiness requiring little to no effort.[5]

### A. Normal filament substitute types

Almost five common filament kinds have been adopted, to be specific, coir (*CocosNucifera*), date palm (*Phoenix dactylifera*), flax (*Linumusitatissimum*), hemp (*Cannabis sativa*), and sisal (*Agave sisalana*). Amongst total regular filament is generally utilized as a part of the vehicle manufacturing companies excluding the date palm lone.[5]

### B. Realities of the normal filaments

The vast majority of the properties of the standard filament for flax, hemp, coir, etc be accounted for and gathered by various specialists, regarding examination, the required realities are embraced. The consented physical, synthetic, and motorized realities of the standard filament utilized as a part of this investigation are classified in Table 1. It is qualified to specify that the more significant part of the qualities recorded in Table 1 is with vast reaches. This is because of the characteristic inconstancy in the regular filament and testing of their strategies [5].

**TABLE 1 THE COMPILED PHYSICAL, CHEMICAL AND MECHANICAL PROPERTIES OF THE NATURAL FIBERS USED IN THIS STUDY.[5]**

Fiber type	Coir	Date Palme	Flax	Hemp	Sisal
Density (g/cm <sup>3</sup> )	1.15-1.46	0.9-1.2	1.4-1.5	1.4-1.5	1.33-1.5
Length (mm)	20-150	20-250	5-900	5-55	900
Diameter (μm)	10-460	100-1000	12-600	25-500	8-200
Tensile Strength (Mpa)	95-230	97-275	343-2000	270-900	363-700
Tensile Modulus (Gpa)	2.8-6	2.5-12	27.6-103	23.5-90	9-38
Specific Modulus (approx.)	4	7	45	40	17
Elongation to Break (%)	15-51.4	2-19	1.2-3.3	1-3.5	2-7
Cellulose (wt%)	32-43.8	46	62-72	68-74.4	60-78
Hemicellulose (wt%)	0.15-20	18	18.6-20.6	15-22.4	10-14.2
Lignin (wt%)	40-45	20	2.3	3.7-10	8-14
Moisture Content (wt%)	8	5-10.5	8-12	6.2-12	10-22
Cost per weight (USD/kg)	0.3	0.02	9	1.2	1
Thermal conductivity (W/m.K)	0.047	0.083	0.119	0.115	0.07

#### IV. RESULTS & DISCUSSIONS

The three most basic sorts of strengthening fibers incorporate fiberglass, carbon, and Aramid.[6]

##### A. Carbon fibers

Carbon fibers are utilized for strengthening certain framework materials to shape composites. Carbon fibers are unidirectional fortifications and can be masterminded in such a path in the composite that it is more grounded toward the path, which must bear loads. The physical properties of carbon fiber fortified composite materials depend extensively on the idea of the lattice, the fiber arrangement, the volume part of the fiber and framework, and on the embellishment conditions. A few sorts of grid materials, for example, glass and pottery, metal and plastics have been utilized as frameworks for support via carbon fiber.[6]

##### B. Glass fibers

Glass fibers are the most widely recognized of all strengthening fibers for polymeric (plastic) matrix composites (PMCs). The principal points of interest of glass fiber are minimal effort, high elasticity, high synthetic protection, and unusual protecting properties. The two sorts of glass fibers customarily utilized as a part of the fiber-fortified plastics enterprises are E-glass and S-glass. Another sort known as C-glass is utilized as a part of substance applications requiring more prominent erosion protection from acids that is given by E-glass.[6]

##### C. Kevlar fibers

Kevlar has a place with a gathering of profoundly crystalline aramid (aromatic amide) fibers that have the lowest specific gravity and the most notable tensile strength to weight proportion among the current restorative fibers. They are being utilized as support in numerous marine and aviation applications.[6]

#### V. CONCLUSION

As of now, it is felt and proved globally, that ecological degradation is a grave issue as for as global warming and accessibility of fossil fuel are a concern. Almost every sincere citizen of every country is thinking in the direction of sustainability for the current and future generation. In this

paper, various aspect concerning fiber reinforcement used to decrease the weight of the vehicle and its effect on the environment is discussed. Source of natural fibers that is an animal, plant, and mineral have been taken into consideration for the sustainability aspect. Moreover, applications of natural fiber composite (NFC) in an automobile discussed.

#### REFERENCES

1. J. W. Mcauley, "Global Sustainability and Key Needs in Future Automotive Design," vol. 37, no. 23, pp. 5414-5416, 2003.
2. D.-H. Kim, H.-G. Kim, and H.-S. Kim, "Design optimization and manufacture of hybrid glass/carbon fiber reinforced composite bumper beam for an automobile vehicle," *Compos. Struct.*, vol. 131, pp. 742-752, Nov. 2015.
3. E. Omrani, P. L. Menezes, and P. K. Rohatgi, "State of the art on tribological behavior of polymer matrix composites reinforced with natural fibers in the green materials world," *Eng. Sci. Technol. an Int. J.*, vol. 19, no. 2, pp. 717-736, 2016.
4. F. Ahmad, H. S. Choi, and M. K. Park, "A Review: Natural Fiber Composites Selection given Mechanical, Light Weight, and Economic Properties," *Macromol. Mater. Eng.*, vol. 300, no. 1, pp. 10-24, Jan. 2015.
5. F. M. AL-Oqla, S. M. Sapuan, M. R. Ishak, and A. A. Nuraini, "Predicting the potential of agro waste fibers for sustainable automotive industry using a decision-making model," *Comput. Electron. Agric.*, vol. 113, pp. 116-127, 2015.
6. Munawar Ali Munawar al. "Natural fiber-reinforced polymer composites," no. October 2014. *Proc. Pakistan Acad. Sci.* 44(2):129-144.2007



**Ahrar Ahmad Born** in July 1972 at Gorakhpur, UP, India. Received degree of B.Sc. Engineering in Mechanical in 1995, from AMU, Aligarh, UP, India. Completed M.E. (Machine Design) in 2004 from the University of Mumbai, India. Currently perusing Ph. D. in Mechanical Engineering from Datta Meghe College of Engineering, affiliated to University of Mumbai India



Dr. Vilas B. Shinde, Doctorate in Mechanical Engineering from the University of Mumbai, Professor & Research Supervisor at Datta Meghe College of Engineering, affiliated to the University of Mumbai, India.