

# Hand Gesture Recognition System using Deep Learning



B. Hemanth, K. Sai Venkat, Y. Bhaskar Rao

**ABSTRACT-:** *Hand motion acknowledgment is a characteristic method for human PC association and a zone of dynamic research in PC vision and AI. This is a zone with a wide range of conceivable applications, giving clients an easier and increasingly normal approach to speak with robots/frameworks interfaces, without the requirement for additional gadgets. Along these lines, the essential objective of signal acknowledgment explore connected to Human-Computer Interaction (HCI) is to make frameworks, which can distinguish explicit human motions and use them to pass on data or controlling gadgets. For that, vision-based hand signal interfaces require quick and incredibly strong hand discovery, and motion acknowledgment continuously. This paper introduces an answer, sufficiently nonexclusive, with the assistance of deep learning, permitting its application in a wide scope of human-PC interfaces, for ongoing motion acknowledgment. Investigations did demonstrated that the framework had the capacity to accomplish a precision of 99.4% as far as hand act acknowledgment and a normal exactness of 93.72% as far as unique signal acknowledgment.*

**Keywords:** *Hand posture recognition, Hand gesture recognition, computer vision, Neural network, human-computer interaction*

## I. INTRODUCTION

There are zones where this pattern is a benefit, as in the utilization of these innovations on interfaces that can help individuals with physical incapacities, or zones where it is a supplement to the ordinary method for conveying. Communication via gestures, for instance, is the most regular method for trading data among hard of hearing individuals, in spite of the fact that it has been seen that they experience issues in interfacing with typical individuals. Gesture based communication comprises of a vocabulary of signs in the very same manner as spoken language comprises of a vocabulary of words. Communications through signing are not standard and general and the sentence structures vary from nation to nation. The American Sign Language (ASL), for instance, includes hand developments, body developments and outward appearances. The motivation behind Sign Language Recognition (SLR) frameworks is to give a productive and exact approach to change over gesture based communication

into content or voice has helps for the meeting hindered for instance, or empowering youthful youngsters to connect with PCs (perceiving gesture based communication), among others. Since SLR infers passing on significant data using hand signals, cautious element choice and extraction are essential perspectives to consider. As far as hand signal acknowledgment, there are essentially two kinds of methodologies: vision-based methodologies and information glove strategies. This paper centers around making a dream based methodology, to execute a framework equipped for performing stance and signal acknowledgment for ongoing applications. Vision-based hand signal acknowledgment frameworks were the primary focal point of the work since they give an easier and increasingly instinctive method for correspondence between a human and a PC. Utilizing visual contribution to this setting makes it conceivable to discuss remotely with automated gear, without the requirement for physical contact or any additional gadgets it is important to create proficient and constant motion acknowledgment frameworks, so as to perform increasingly human-like interfaces among people and robots. In spite of the fact that it is hard to actualize a dream based interface for nonexclusive use, it is by the by conceivable to plan this sort of interface for a controlled situation. Moreover, PC vision based systems have the benefit of being non-obtrusive and dependent on the manner in which individuals see data from their environment. Nonetheless, to have the capacity to actualize such frameworks, there are various necessities that the framework must fulfill, so as to be executed in an effective manner, which are:

**Robustness:** The system should be customer self-governing and adequately incredible to factors like visual noise, divided information due for example to hindrances, assortments of light, etc.

**Computational efficiency:** Vision based coordinated effort requires continuous structures, so the counts and learning systems should be the best possible and computational monetarily canny.

**Error tolerance:** Bungles on vision-based structures should be suffered and recognized. In case some oversight is made, the customer should probably repetitive the bearing, as opposed to allowing the system to settle on wrong decisions.

**Scalability:** The structure must be adequately balanced and orchestrated with the objective that it can serve different unmistakable applications. The focal point of vision based applications for human PC participation should be the proportional, paying little personality to the application.

Manuscript published on 30 August 2019.

\* Correspondence Author (s)

**B. Hemanth**, Student, ECE Department, SSE, SIMATS, Chennai Tamilnadu, India(email: b.hemanth1997@gmail.com)


**K. Sai Venkat**, Student, ECE Department, SSE, SIMATS, Chennai Tamilnadu, India(email: sai.venkat0037@gmail.com)

**Mr.Y. Bhaskar Rao**, Assistant Professor, ECE Department, SSE, SIMATS, Chennai Tamilnadu, India(email: ybhaskarrao86@gmail.com)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

II. SYSTEM ARCHITECTURE

The principle expectation of this undertaking is constant hand signal acknowledgment. Here in this undertaking neural system idea is utilized for hand motion acknowledgment which depends on PC vision. Here we recognizing the hand signals in four phases: Image Acquisition, Preprocessing of the picture, Feature Extraction, and Hand motion acknowledgment.

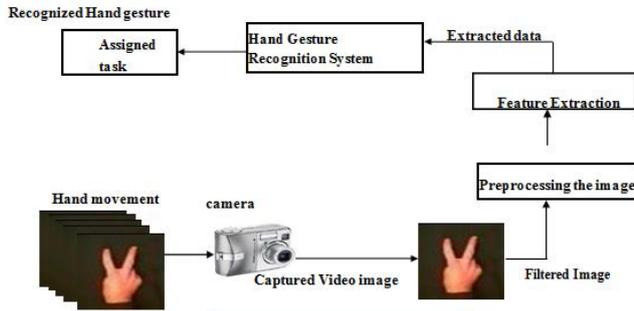

Architecture of Hand Gesture Recognition System

III. IMAGE ACQUISITION

The client basically is moving his/her hand into motivation behind read on the camera to begin relationship with the framework. The framework utilizes a kodak-easyshare-c340 pushed camera to ask the work district space any place the client's hand is found. The establishment of the picture is diminish and has unfathomable lighting framework. picture is given by uncertain bundling rate. to search out the perfection practically about act, separate 2 edges abuse a grasp respect. The snapping point respect is thirty. At initial 2 back to back lodgings ar removed and if the removed outcome's logically basic that the sting respects (for example T=30%), by then the identified with edge is considered as very surprising hand blessing. Else they're planning to be same hand blessing. just in the event that f(x, y, n) and f(x, y, n-1) ar 2 sequential edges and D(x, y, n) is that the refinement of these 2 requested edges get by following condition:

$$D(x, y, n) = |f(x, y, n) - f(x, y, n-1)| \quad (1)$$

On the off likelihood that  $D(x, y, n) > T$  check the characterize of most recent edge commonly. any place n is that the measure of case and (x, y) is that the directions of the sting.

IV. PREPROCESSING OF IMAGE

Pictures from the video arrangement went through the Preprocessing stage for getting maximum information for extraction.

The calculations consecutively utilized in this stage are turning gray, normalizing and histogram evening out. In the wake of acquiring a grayscale picture, we utilize Median channels to expel commotion from information picture, and after that edge the picture to a parallel one. We utilized the neighborhood versatile limit calculation for the binarization step. At that point evacuate the undesirable bit of the picture; we need to expel the superfluous pixels (0) from unique picture. This is done in light of the fact that we have to create measure free calculation.

1. ORIGINAL IMAGE	2. REDUCED IMAGE
000000000000000000	
000000000000000000	
000001100000000000	0000110000000000
000001110000000000	0001110000000000
000001110000000000	0001110000000000
000001110000000000	0000111000000000
000001110000000000	0001110000000000
000001110000000000	0001110000000000
000001110000000000	0001110000000000
000001110000000000	0001110000000000
000001110000000000	0001110000000000
000001111000000000	0001111000000000
000011110111000000	0011110111100000
000011111110110000	0011111111011000
000111111011111000	0111111011111100
001111111111111100	1111111111111111
001101110111111000	1101110111111100
001101111111110000	1101111111111100

Algorithm 1

```

1) startfromtopleftcorner;repeatforeachcolumnandrowifsumofallblackpixelsinarow/column > 0thensavecolumnandrow.
2) Else don't save columnandrow
    
```

V. FEATURE EXTRACTION

Feature extraction is the area where we divide the input images into small portions and here unwanted pixels are removed. In Feature, we are keep on tracking the hand movements to get exact letter for each gesture.

We can acquire the focal point of the picture by utilizing following condition.

Centre x = width/2  
Centre y = height/2

Feature 1

This is the relation between width and height of the input image

Feature 1 = height/width

Feature 2

Here we check how the dim pixels are flowing in the image. Right off the amount of pixels inside the image is resolved and after that all out pixels are determined.

Total pixels = height \* weight


Feature 2 is used to number of up pixels in total pixels By splitting the image into up and down region

feature2 = up pixels/ total pixels

Feature 3 is used to number of down pixels in total pixels by splitting the image into up and down region

feature3 = down pixels/ total pixel



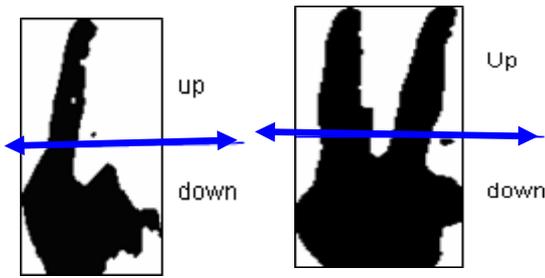


**Upper and Down regions of the input image**

Feature 4 and 5 is used to find total number of left and right side pixels by dividing the recognized hand gestured into right and left side

Feature 4 = left pixels/ total pixels


Feature 5 = right pixels/ total pixels

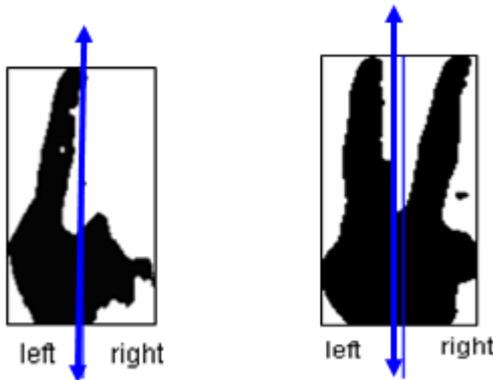

**Here image is divided into left and portions**

Here we again separate the picture into sub areas to check the quantity of dim pixels are arranged in every region Feature 6 is are the dimension of dim pixels arranged in the each sub zones of hand movements pictures.

$$\text{feature}_{(n)} = \frac{\text{sub divided area pixels}_{(n)}}{\text{total pixels}}$$

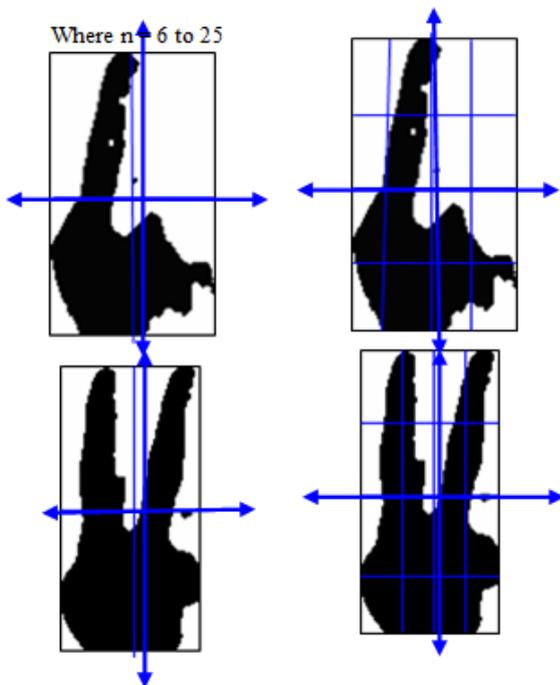


**SPLITTING OF IMAGE REGIONS**

*Feature 7*

The normal separation between dark picture and main issue is determined by the element

$$\text{Feature 7} = \frac{1}{\text{Total Pixels}} \times \sum \sum \sqrt{(x-i)^2 + (y-j)^2}$$

Where (x, y) are the directions of a pixels and (i, j) are the directions of essential issue.

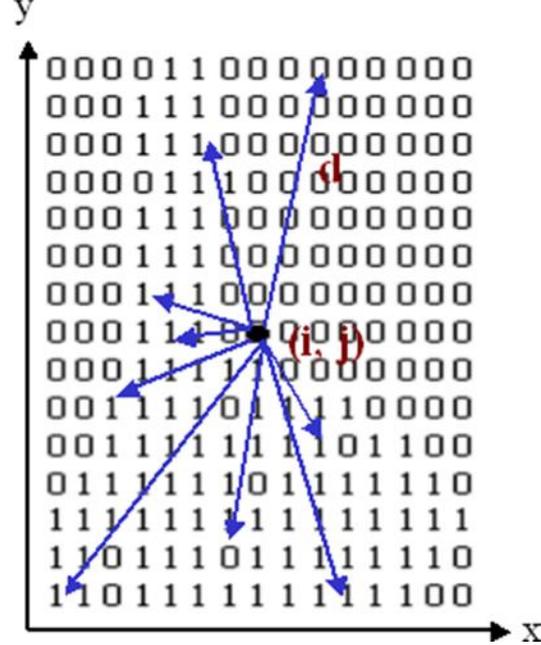

**Above figure shows the separation between dark pixels and mid point.**

*Feature 8*

Ascertain focal movement of hand movement. For f(x, y) 2- dimensional capacity of M × N paired picture, the snapshot of request (p + q) is characterized by:

$$m_{pq} = \sum_{x=1}^M \sum_{y=1}^N (x)^p (y)^q f(x, y)$$

Where p, q = 0, 1, 2, 3 ..... ..

Central moment can be obtained by equation:

$$\mu_{pq} = \sum \sum (x-x)^p (y-y)^q f(x, y)$$

$$\text{Where } \bar{x} = \frac{m_{10}}{m_{00}} \text{ and } \bar{y} = \frac{m_{01}}{m_{00}}$$

The central moment changes for scaling normalisation is shown by following equation:

$$\text{where } \gamma = \frac{\eta_{pq} = \mu}{p+q} \Big|_{+1} \Big|_{\mu_0}$$

$$M_1 = \eta_{20} + \eta_{02}$$

$$M_2 = (\eta_{20} - \eta_{02})^2 + 4\eta_{11}^2$$

$$M_3 = (\eta_{30} - 3\eta_{12})^2 + (3\eta_{21} - \eta_{03})^2$$

$$M_4 = (\eta_{30} + \eta_{12})^2 + (\eta_{21} + \eta_{03})^2$$


$$M = (\eta_{30} - 3\eta_{12})(\eta_{21} + \eta_{03}) \left[ (\eta_{30} + \eta_{12})^2 - (\eta_{21} + \eta_{03})^2 \right] + (3\eta_{21} - \eta_{03})(\eta_{30} + \eta_{12}) \left[ (\eta_{30} + \eta_{12})^2 - (\eta_{21} + \eta_{03})^2 \right]$$

$$M = (\eta_{30} - \eta_{12}) \left[ (\eta_{30} + \eta_{12})^2 - (\eta_{21} + \eta_{03})^2 \right] + 4\eta_{11} \eta_{30} + \eta_{12} \eta_{21} + \eta_{03}$$


$$M = (3\eta_{21} - \eta_{03})(\eta_{30} + \eta_{12}) \left[ (\eta_{30} + \eta_{12})^2 - 3(\eta_{21} + \eta_{03})^2 \right] - (\eta_{30} + 3\eta_{12})(\eta_{21} + \eta_{03}) \left[ 3(\eta_{30} + \eta_{12})^2 - (\eta_{21} + \eta_{03})^2 \right]$$

### VI. DETECTION OF HAND GESTURES USING CNN

Here feed-forward multilayer ANNs is used. For this framework, we utilized 85 covered neurons by registering the information layer is estimated as 33 × 20 and the yield layer has 4 neurons in light of the fact that there are 4 yields of the framework. The framework is totally related and use back-multiplication learning computation.

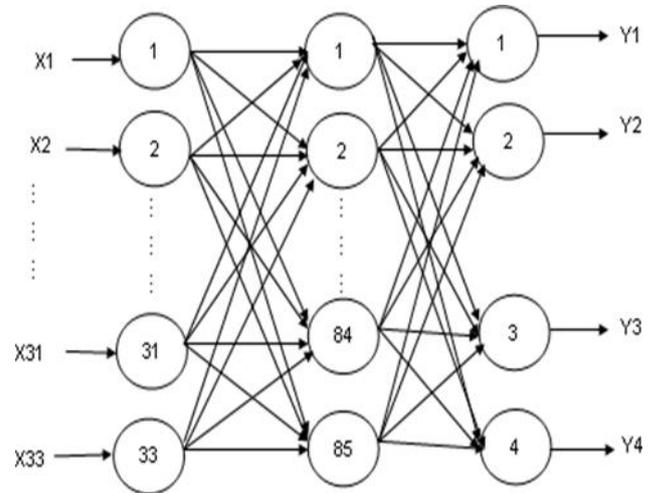

Network design for the system

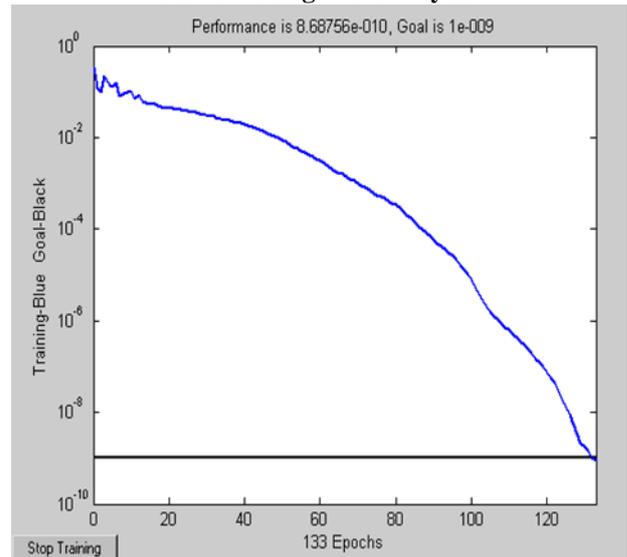


Neural Network training


Here we are giving inputs to the model and it calculates the outputs which is compared with targets with are associated and also calculates mean square error. If maximum number of errors occurs then the model training is stopped if not means training goes on. As we see in the figure at the beginning of training error rate is more but after some 80 epochs this errors are decreased and neural net can determine these very small errors.

### VII. RESULT


Here in these task we anticipated hand signals for the letter sets like A,B,C. We have prepared the framework by giving 2000 training models for every letter set. The Hand images for each motion is taken from American gesture based communication which is appeared in the beneath chart. We have found of 100% proficiency for 2 letters in A, B and 99.9% for C. In these undertaking neural system is utilized to perceive the signal we have given. Absolute quantities of casings we have prepared the model traing of 6000 to get more precision in distinguishing each picture.

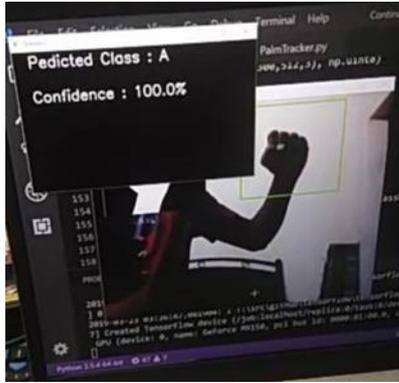

ALPHABET A

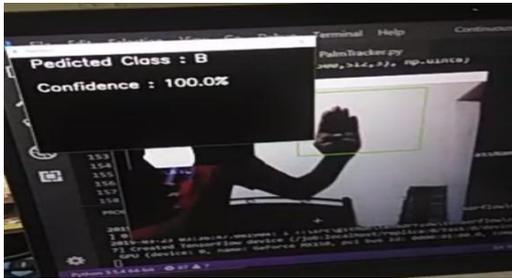

ALPHABET B

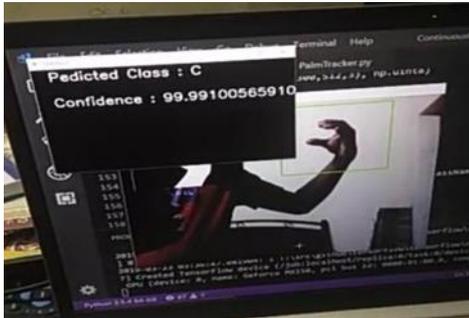

ALPHABET C

Table showing information about training

Type of Pattern	No. of training Models given	Alphabet	Correct recognition rate
	2000	A	100%
	2000	B	100%
	2000	C	99.9%
Total	6000		99.9%

Correct recognition % = Correct recognition / Total frames

Error rate = False recognition / Total frames

Here we are preparing the model from every single imaginable direction, the framework can see each signal given by the client. The framework has the goals of 384\*288 pixels on a solitary 1.7GHz Pentium processor. Now and again mistakes will happen for the regardless hand signals.

### VIII. CONCLUSION

Hand motions are an incredible route for human correspondence, with bunches of potential applications in the territory of human PC association. Vision-based hand signal acknowledgment strategies have many demonstrated favorable circumstances contrasted and conventional gadgets. Be that as it may, hand motion acknowledgment is a troublesome issue and the present work is just a little commitment towards accomplishing the outcomes required in the field. The fundamental goal of this work was to study and actualize arrangements that could be sufficiently nonexclusive, with the assistance of deep learning, permitting its application in a wide scope of human-PC interfaces, for online motion and stance acknowledgment.

### REFERENCES

1. Alan Dix, Janet Finlay, Gregory D. Abowd, and Russell Beale, "Human-Computer Interaction" 3rd ed. Prentice Hall, 2003.
2. Ray Lockton, "Hand Gesture Recognition Using Computer Vision," 4th year project report, Balliol College, Oxford University.
3. Klimis Symeonidis, "Hand Gesture Recognition Using Neural Networks," Degree of Master of Science in Multimedia Signal Processing communications, School of Electronic and Electrical Engineering, On August 23, 2000.
4. Yiqiang CHEN, Wen GAO, Jiyong MA, "Hand Gesture Recognition Based on Decision Tree," Institute of Computing Technology, Chinese Academy of Sciences, Beijing.
5. Atid Shamaie, Wu Hai and Alistair Sutherland, "Hand-Gesture Recognition for HCI," ERCIM News, No.46, July 2001.
6. Andrea Corradini, Horst-Michael Gross, "Camera-based Gesture Recognition for Robot Control," Technical University of Ilmenau, Department of Neuroinformatics, D-98684 Ilmenau, Federal Republic of Germany, IJCNN 2000.
7. Hunter E, Schlenzig J, Jain R, "Posture Estimation in Reduced-Model Gesture Input System," Proc. of Int. Workshop on Automatic Face and Gesture Recognition, 1995, Zurich, Switzerland.
8. Triesch J, von der Malsburg C, "Robust Classification of Hand Posture against Complex Background," Proc. of Int. Workshop on Automatic Face and Gesture Recognition, Vermont, Oct. 14-16 1996, pp. 170-175.
9. M. K. Hu, "Visual Pattern Recognition by Moment Invariants", IRE Trans. Info. Theory, vol. IT-8, pp.179-187, 1962.
10. Simon Haykin, "Neural Networks: A Comprehensive Foundation", Second edition, Pearson Education Asia, 2001.
11. Yuanxin Zhu, "Vision-Based Recognition of Continuous Dynamic Hand Gestures," Department of Computer Science & Technology, Tsinghua University, Beijing, China.
12. Elena Sánchez-Nielsen, Luis Antón-Canalís, Mario Hernández-Tejera, "Hand gesture recognition for Human Machine Interaction," Department of Statistic, O.R. and Computer Science, University of La Laguna Edificio de Física y Matemáticas, 38271, La Laguna, Spain.

13. Raymond Lockton and Andrew W. Fitzgibbon, "Real-time gesture recognition using deterministic boosting," Department of Engineering Science, University of Oxford, BMVC 2002.