

# Advancement in Protection Systems in a Thermal Power Plant



Rangaswamy.T.R, Prakash.D, Jayalakshmi.V.

**Abstract:** Protection and interlock systems is a major study and research topic involved in a thermal power station to safe guard the equipment of boiler, turbine and generator. Main objective of the paper is to demonstrate all the protections and interlocks available for Boiler, Turbine & Generator and show how the entire plant is protected from abnormal conditions. Unnecessary tripping of thermal plant leads to loss of Generation, long maintenance and high cost. This paper will be beneficial for the fresher's and trainee engineers entering into thermal power station to gain knowledge of all protection system involved in a thermal power plant.

**Keywords :** Thermal,PowerPplant,Turbine..

## I. INTRODUCTION

In order to achieve more economical, effective and reliable activities, the entire system must be correctly regulated for all real-time associated industrial activities. The process in which the assembly of a number of interconnected measuring and control instruments for the measurement, analysis and control of electrical and non-electrical physical quantities is referred to as industrial automation. There are different types of controls for industrial automation, such as electrical, electronic and mechanical.[1-5]

The method of measuring and controlling different amounts in sectors by using different industrial instruments is referred to as industrial instrumentation. In order to control any amount, it is mainly necessary to measure that specific amount. The amounts used in the measurement industry include fluid pressure, fluid flow rate, temperature, concentration, electrical present, electrical voltage, etc. Thus, after the measurement of the required amount, the measured values are transferred for indication or calculation or control purposes. In an automatic control operation, the quantity can be controlled by the control signal sent to the control device by the computer. In particular, the control systems are electric motor, control valve, etc. Most sectors are the Automated Distributed Control System (DCS). Measurement & Control consists of sensors or transducers or input gadgets, controllers or processors, transmitters and actuators or yield contraptions. Information instrumentation is utilized for

looking, physical wholes, for example, stream, level, weight, temperature, etc. Yield instrumentation wires control gear, for example, valves, controllers, circuit breakers and moves. These are designed to control the required output variable, offering control capability either remotely or automatically. These shall be regarded as initial or final control systems. Interlock and the security scheme will take care of the safety of the machinery and of the human being.[6-9]

## II. THERMAL POWER PLANT PROTECTION SYSTEM

Functionality of the protection system Boiler journey: stops fuel from being fed to the furnace and removes fuel from the boiler and prevents any explosive situation from continuing. Turbine Trip: Close all steam intake valves (ESV, GOV Valves) to Stop steam intake to guarantee turbine coasts down and Open all steam intake lines upstream / downstream valves to avoid accumulation of water that may enter the Turbine Generator Trip: Opens CB Connection Generator to Grid from defective generator and opens Field Circuit Breaker FSSS (Furnace Safeguard Supervisory System) FSSS is designed by using many safety interlocks and complex logics which ensures the execution of a safe, orderly firing sequence during the Startup and Shutdown of Fuel Firing Equipment. FSSS is designed in accordance with the below listed guidelines,[10-15]

1. National Fire Protection Association ( 8501 /8502 or others)

2. Industrial Risk Insurers (IRI)

3. Factory Mutual loss prevention guidelines.

This FSSS scheme offers safety interlocks to safeguard against future emergency scenarios in the case of a malfunction of fuel-fired equipment and related air systems. FSSSS is usually intended to conduct the following tasks ;

- It allows fuel firing only after it gets a satisfactory Furnace Purge Complete Signal.
- It allows starting of any fuel firing equipments, if certain interlocks and permissive are satisfied.
- It monitors & controls the correct sequence start-up and shutdown and provides continuous feedback to the operators.
- It ensures that certain safety inter-lock conditions remain satisfied during operation of fuel firing equipment.
- Provides flame surveillance when fuel-fired equipment is in service.

• Initiates an MFT (Master Fuel Trip) when the working circumstances are abnormal.

FSSS also includes the following operational tasks:

- Supervision of the furnace purge.
- Secondary Air Damper Modulation / Control, On / Off Control and Control. Light oil on / off control and oversight.
- Heavy oil on / off inspection and oversight.

**Manuscript published on 30 August 2019.**

\* Correspondence Author (s)

**Rangaswamy.T.R** Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India . trswamy49@gmail.com

**Prakash.D,** Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India prakashacademics@gmail.com

**Jayalakshmi.V,** Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India . Jayalakshmiv.eee@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>



- Pulveriser / Coal Mill and Feeder on and off control and oversight.
- Intelligence of the flame scanner and control of the procedure.[16-20]
- Overall protection for Boiler flame failure.
- Protection of the boiler journey.

### BOILER PROTECTIONS

- Steam Drum level is very high / very small
- Furnace pressure is very high / very small
- All FD FAN fans have stopped.
  - All ID FAN supporters have stopped.
  - Total boiler air flow < 30 per cent ;
- Furnace flame loss: scanner sense loss of all flame
- Loss of both scanner air fans
- Fuel loss: All fuel tripped (heavy oil OFT, light oil OFT, all coal Pulverizers tripped
- All air pre-heaters stopped
- All BFP stopped
- Re-heater protection trip
- Loss of unit 220 V DC / 24V DC / 110V AC power supply
- Manual MFT: the two gets of the MFT squashed by the authority at a relative minute • Purge Interlock shields water from entering an unfired all the novel in association with smoking until the stove has been completely washed of water.

Low Air Flow Interlock or Fan Interlock The fuel is done when the breeze stream or gobbling up air ventilator or blower is lost. [21]

- Low Fuel Supply Interlock The fuel is done in setting on a goof of motor store that would by somehow or another outcome in lacking fire conditions.
- Loss Flame The interlock of all batteries is butchered when the fire is lost in the stove, or the gas to the individual burner is executed when the fire is lost to that burner.
- Fan Interlock Stops compelled draft on the loss of an induced fan.
- Low Water Interlock (Optional) Removes fuel at low water level in the boiler drum.

### III. TURBINE PROTECTIONS

Turbine Bearing Oil Pressure Low

Vacuum Condenser Low

- Condenser Level High
- Hp Exhaust Temperature High
- 3 Out of 4 Governor Valves Tripped
- 2 Out of 2 Intercept Valves Tripped
- Ehg Fault
- Thrust Wear High
- Stator Coolant Flow Low
- Main Steam Pressure Low
- Main Steam Temperature Low
- MFT Operated/86u Operated


### IV. GENERATOR PROTECTION

As generators and transformers are the key bits of the criticalness plot, it is as necessities be vital to understand the most fit structure to ensure transformers and generators. These are the going with structures (ANSI codes) that we use to shield transformers and generators from reshaping: generator differential referencing (87/G1): security is furnished with related, character blowing gushing present trades. The trades will have a get mix of 10 to 40 percent of 5A and will have a fitting stabilizer to guarantee

explanation against inside issues. The trades will be tuned to the central rehash of dispatch of the sounds made by the CT sprinkling..

Generator-transformer differential security (87/GT1): The generator-transformer moves must be of a lacking sharp percent proclivity sort with consonant control and have CT-limit building equipment. The hand-off ought to have every single standard major to make it injured for issue current, polarizing inrush present and sporadic charging inrush current during obliged time task over voltage conditions. Issue transformer differential accreditation unit (87T1A): the level of getting a charge out of differential trades utilized close to the affirmation dealing with contraption. The hand-off won't be utilized for charging inrush current. High set brief over present trades will be given in get-together with the past hand-off, set for charging inrush current, for silly security from inside reshaping. Generator Stator Earth Defect Protection (64GI): Stator Earth Defect Protection contains a zero-party voltage hand-off related with the beat delta bowing of the generator voltage transformer. The accreditation will work just to trigger a period surrendered sign and the hand-off will from this time forward be dependably paid squeezing character to at 110V. T Between turn generator protection(87TG): accreditation by structures for an undulating over-current hand-off. The trade will join beating back structures to render it hurt for third music. The trade will have a sensible structure to cover 20-50 percent of the generator current. Generator rotor earth need security (64-1,64-2): the standard rotor earth mutilation of the generator is seen by structures for a superimposed unequivocal dc proclivity on the field winding. The DC getting a need out for will be of a firm base on that the necessities at any phase in the winding are checked by the structures. The trade will like way tie the voltage experienced. Second rotor earth bowing security for generators is about given. Field endorsing loss of generator(40 G): this security will be yielded in a particular time of the fixed impedance type. The trades will have impedance structures to cover the standard impedance get-together of mammoth turbo generators. Generator Backup Protection(21 G): the generator post trade will be of three stage impedance type for one zone security, together with the goliath extra trades and two stage clock for one zone clarification. Generator under power and against motoring security (67-1G, 67-2G): the improvement up transformer back up earth mutilation demand current trades will be of IDMT properties. One of the two trades will be set with higher time dial setting to give second time of security. Security from over-bother generator (51 G): one over present hand-off is given to trigger an over-burden alert. The trade will have a high reset degree and a standard than standard strong warmth rating. [19]

Seeing over voltage generator (59 G): sensible overvoltage moves ideally with volt/cycle highlights will be given. Post accreditation for extra transformer unit (50T1A): Two brief over-current trades with an outside DC clock are given for help security for the 6.6 kV transport bar unit.[20]

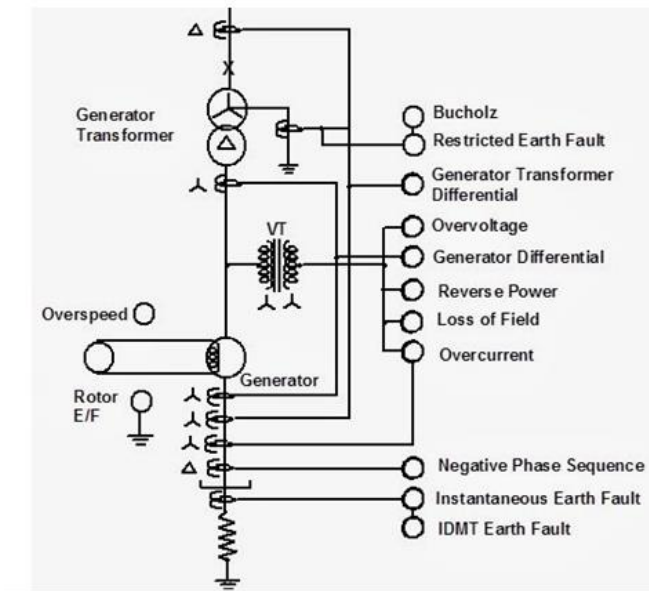

**Fig.1 Circuit issue security (95 G): This plans will imagine the improvement of all voltage circuit protections in the case of failure of the generator fuse. Lockout relays (86G and 86GT):**

**V. BASIS OF TRIPPING CLASSIFICATION**

The trip structure for the generator depends upon the major for withdrawal of the generator on the grounds of the sort of fault. For instance, there are some faults like Generator Differential Protection that call for an instant trip of Generator Breaker without delay, while there are some faults like Loss of Excitation, Rotor Earth Fault, etc. that do not call for an instant trip of Generator.

Class-A1 Trip: Protections for necessities the generator that require moment control are amassed under this Class-A1. There is a goliath arrangement of the twistings that are held in this class. They're as showed up by the going with:

- (a) Generator Differential Protection
- (b) 100 percent Stator Earth Fault Protection
- (c) Generator Over Voltage Protection
- (d) Dead Machine Protection
- (e) 95 percent Stator Earth Fault Protection
- (f) Start Over Current Protection if there should rise an occasion of Class A1 Actuation, Generator Circuit Breaker and Filed Circuit Breaker are opened near turbine squashing and utilizing. Class-A2 Trip: Defect accreditations in Generator Transformer (GT), Isolated Phase Bus Duct (IPBD) and Unit Transformer (UT) are amassed under this Class-A2. Routinely the going with structure are kept up under Class-A2: [15-16]
  - an) Overflow Protection of Generator
  - b) Backup Impedance Protection of Generator
  - c) Differential Protection of GT
  - d) Buchholz Relay of GT

- e) PRD of GT
- f) Trip of OTI and WTI of GT
- g) Fire Protection of GT
- h) Differential Protection of UT
- I Buchholz Relay and PRD of Main Tank of UT
- j) Trip of OTI and WTI of UT
- k) Class-B

Experience: The accreditations for issues in the generator that don't require minute constraint are amassed under this Class-B. The turbine is first spellbound and the generator is permitted to run utilizing got steam in the turbine. See there is some need the point of view side, for example in the steam cycle, under this condition the turbine will be squashed first, while the generator will keep running utilizing got steam until the vexed power hand-off works. Generator Circuit Breaker is broken when talk power is begun. Routinely, the Loss of Excitation and the Rotor Earth Fault of the Generator are held in this class. These checks will be given up when worked by the Generator Circuit Breaker, Field Class-C Trip: The fault protections / abnormal conditions in the grid that call for the Grid Generator to be disconnected are grouped under this Class-C. In this situation, the generator is separated from the grid by opening the appropriate breaker, i.e. Generator HV side Breaker Transformer. Bear in mind that only the Generator is isolated from the grid in this situation. As a result, Generator remains to supply Station loads (also known as house loads). Such a system where the generator operates on house load at decreased energy is known as Generator Islanding. Everything considered, the going with accreditations of the generator are kept up under this class:

- (a) Unbalance or Negative Sequence Protection
- (b) Backup Impedance Protection
- (c) Under Frequency
- (d) Over Frequency
- (e) Pole Slipping Protection Boiler Trip: Stops fuel feed to Furnace
- q Purpose – Remove fuel from Boiler and prevent any explosive situation from continuing Turbine Trip: Close all steam intake valves (ESV, GOV Valves) q Purpose – Stop steam intake

**VI. CONCLUSIONS**

This article provided the current status and overview of interlocking thermal power plant and security systems. The interlocking and security system shall be used to guarantee the safety of the equipment and staff as well as the stable operation of the power plant. The security scheme shall be created for the automatic operation of the machinery with or without delay. This document will benefit fresher and trainee technicians entering the thermal power station in order to obtain understanding of all the security systems engaged in the thermal power plant.



### REFERENCES

1. Sharma, R.K., Irusapparajan, G. & Periyazhagar, D. 2019, "Three-phase symmetric cascading Z-source seven levels multilevel inverter excited by multi carrier sinusoidal pulse width modulation scheme", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 10, pp. 4269-4274.
2. Velavan, R., Bharanidharan, S. & Sheeba, B. 2019, "EMF pollution - Causes, effects and protection", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 9 Special Issue 3, pp. 1166-1168.
3. Saravana, S., Balaji, S., Arulselvi, S. & John Paul Praveen, A. 2019, "Reliable power quality monitoring and protection system", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 9 Special Issue 3, pp. 644-645.
4. Tamil Selvan, S. & Sundararajan, M. 2019, "Performance Parameters of 3 Value 8t Cntfet Based Sram Cell Design Using H-Spice", *International Journal of Recent Technology and Engineering*, vol. 8, no. 2 Special issue 5, pp. 22-27.
5. Jac Fredo, A.R., Abilash, R.S., Femi, R., Mythili, A. & Kumar, C.S. 2019, "Classification of damages in composite images using Zernike moments and support vector machines", *Composites Part B: Engineering*, vol. 168, pp. 77-86.
6. Kathiravan, P. & Govindaraju, C. 2019, "Design and evaluation of ultra gain isolated DC-DC converter for photovoltaic system", *International Journal of Engineering and Advanced Technology*, vol. 8, no. 5, pp. 2646-2651.
7. Kripa, N., Vasuki, R. & Kishore Kanna, R. 2019, "Realtime neural interface controlled au-pair BIMA bot", *International Journal of Recent Technology and Engineering*, vol. 8, no. 1, pp. 992-994.
8. Mohanraj, Meena Kumari, M., Philomina, S. & Jasmin, M. 2019, "In-situ humidity measurement of hydrogen fuel cell car using MEMS sensor", *International Journal of Recent Technology and Engineering*, vol. 8, no. 1, pp. 41-43.
9. Velmurugan, T. & Prakash, S. 2019, "Artificial intelligent based distribution automation of swift fault detection isolation and power restoration for HT network", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 1-6.
10. Dwarakesh, K. & Prem Kumar, G. 2019, "Five-level inverter based sequential boost system using fuzzy logic controller", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 12-19.
11. Anne Gifta, A. & Hemavathi, G. 2019, "Analysis of grid tied solar PV system using ANFIS Algorithm", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 312-316.
12. Jayavel, R., Rangaswamy, T.R. & Prakash, S. 2019, "Efficient grid management system with renewable and conventional power sources", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 287-289.
13. Hemavathi, G. & Maheshwaran, S. 2019, "Proportional resonant controlled high gain step-up converter system with improved response", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 317-323.
14. Periyazhagar, D. & Irusapparajan, G. 2019, "Design and completion of asymmetric single phase 27 level cascaded mli for various pwm scheme", *International Journal of Innovative Technology and Exploring Engineering*, vol. 8, no. 6, pp. 792-797.
15. Mahalakshmi, V. & Vijayaragavan, S.P. 2019, "PV based power electronic converters for high voltage DC applications", *International Journal of Recent Technology and Engineering*, vol. 7, no. 6, pp. 670-674.
16. Irusapparajan, G., Periyazhagar, D., Prabakaran, N. & Rini Ann Jerin, A. 2019, "Experimental verification of ternary DC source cascaded h-bridge multilevel inverter using unipolar pulse width modulation", *Automatika*, vol. 60, no. 1, pp. 19-27.
17. Sangeetha, G., Sherine, S., Arputharaju, K. & Prakash, S. 2019, "On Line Monitoring of Higher Rated Alternator using Automated Generator Capability Curve Administer", *Proceedings of the IEEE International Conference on &quot;Recent Trends in Electrical, Control and Communication&quot;, RTECC 2018*, pp. 176.
18. Bycil, V.J. & Wiselin, M.C.J. 2019, "Modeling and analysis of vibration energy harvesting system using piezo stack", *International Journal of Mechanical and Production Engineering Research and Development*, vol. 9, no. Special Issue 1, pp. 523-533.
19. Sripada, A., Warriar, A., Kapoor, A., Gaur, H. & Hemalatha, B. 2018, "Dynamic lateral balance of humanoid robots on unstable surfaces", *International Conference on Electrical, Electronics, Communication Computer Technologies and Optimization Techniques, ICECCOT 2017*, pp. 539.
20. Srinivasan, S., Thirumalaivasan, K. & Sivakumaran, T.S. 2018, "Performance evaluation of double-output luoo converters", *Journal of Advanced Research in Dynamical and Control Systems*, vol. 10, no. 10 Special Issue, pp. 870-878.
21. Karthikayen, A. & Selvakumar Raja, S. 2018, "A skellam distribution inspired trust factor-based selfish node detection technique in MANETs", *Journal of Advanced Research in Dynamical and Control Systems*, vol. 10, no. 13, pp. 940-949.

### AUTHORS PROFILE



**Rangaswamy.T.R** Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India .



**Prakash.D**, Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India.



**Jayalakshmi.V**, Assistant Professor, Department of Electrical & Electronics Engineering Bharath Institute of Higher Education and Research, Chennai, India.