

Human Facial Expression Recognition using Eigen Face and Neural Network

Pushpaja V. Saudagare, D. S. Chaudhari

Abstract: In many face recognition systems the important part is face detection. The task of detecting face is complex due to its variability present across human faces including color, pose, expression, position and orientation. A face detection system based on principal component analysis algorithm and neural network techniques. Facial expression as a natural and efficient way of communication, it can also be considered as a special case of pattern recognition and also many techniques are available. In principal component analysis algorithm, eigenvector and Eigenfaces are identified the initial face image set and these faces are projected onto the Eigenfaces for calculating the weights. These weights created a face database to recognize the face by using neural network. Classification of face detection and token matching can be carried out any neural network for recognizing the facial expression.

Keywords – Eigen face, Eigenvector, face recognition, facial expression recognition and neural network.

I. INTRODUCTION

The human face is a primary focus which playing a major role to show the identity and emotion. Human has an ability to recognize thousands of faces and also to infer intelligence or character from facial appearance. The image gesture recognition is done using the image pixel to train the neural network. The Viola and Jones describe the face detection technique using Add Boost Haar classifier. Depending on threshold value the researchers system can recognize the facial expression. The approach of this system can be adapted to real time and it briefly describes the schemes of capturing the image and to recognize the gestures. [1] The author Chibelushi and Bourel discussed the different techniques to recognize the features such as line face detection, canny edge detection and different extracted morphology techniques.

The paper proposes the different techniques to extract the features such as forehead, mid forehead, mouth, and cheek. These extracted features provide us the different recognized output using back propagation method. [9]

In an efficient algorithm for motion detection based facial expression recognition using optical flow proposed an efficient algorithm for facial motion detection. This technique is based on optical flow technique which extracts the motion vectors. This algorithm works on frames of segmented image and gives us their result which is depending on motion vectors. [3] This paper proposes the different techniques to recognize

Manuscript Received on June 22, 2012.

Pushpaja V. Saudagare, Electronics and Telecommunication Department, Amravati University, GCOE Amravati. India.

Devendra S. Chaudhari, Electronics and Telecommunication Dept, BE, ME, from Marathwada University, Aurangabad and PhD from Indian Institute of Technology, Bombay, Mumbai, India.

the different feature points. The rough contour estimation routine method is used to obtain the contours of eyebrows, eyes and mouth. [10] Face is a complex multidimensional visual model and for developing a model for face recognition is difficult task. This paper presents coding and decoding methodology for face recognition. This paper proposed the method is based on the information theory concepts viz. principal component analysis method. The proposed system or the recognition system is implemented on eigenface, principal component analysis and artificial neural network. For recognising face the system can be used the eigenface and principal component analysis algorithm technique and for recognising the facial expression the artificial neural network system is worked.

A. Human Gesture Recognition

A vast array of algorithms is available for each module of face recognition system, how to combine them is still a challenging problem, especially for an expression recognition task. The human facial expression recognition system is tested in different ways and had some of the difficulty in clearly recognising the facial expression. The system is divided into three major components, *i.e.*, Image Pre-processing, Feature Extraction and Classification. Almost all modules are based on statistical methods and they will be trained using a training set. The working of classification is depending on principal component analysis and neural network technique. For principal component analysis, Eigenfaces method will be used for extracting feature vector. An input sensing device such as web-cam, it reads the human body movements and communicates with the computer. The mathematical algorithm interpreted with the human gesture and it is based on artificial intelligence techniques. The block diagram of gesture recognition arrangement is as shown in Figure 1.

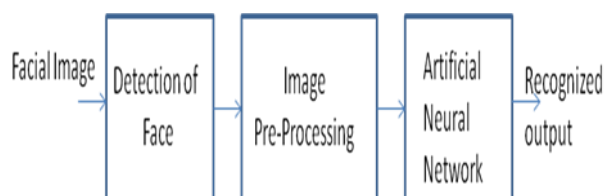


Figure 1: Block Diagram of Gesture Recognition Arrangement

In the gesture recognition arrangement each box treated as one module. First the web-cam captures the image and gives to the face detection block which can detect the face from the captured image. In the face detection, the input block stores the captured image which finds the face area from the image.

Human Facial Expression Recognition using Eigen Face and Neural Network

The face area provides to the pre-processing block which removes the unwanted noise and it also normalize the image. The output is provided to the trainer module, it trains the image and decides whether the image belongs to the face class or not and finally it will provide the information about the recognition of face. [12]

B. Eigenfaces Recognition Systems

In the Eigenfaces theory, the information in a face image is extracted, encoded as efficiently as possible, and then the face image is compared with the training database. In mathematical term, the principal component of the faces or the eigenvectors of the database images, treating an image as point in very high dimensional space. [7] The face descriptor module automatically reduce every face image to $X*Y$ pixel to improve the face recognition performance. Face images are stored in a face library for performing every action of training set. The face library is divided into two sets training dataset and testing dataset. The process of this system is shown in Figure 2

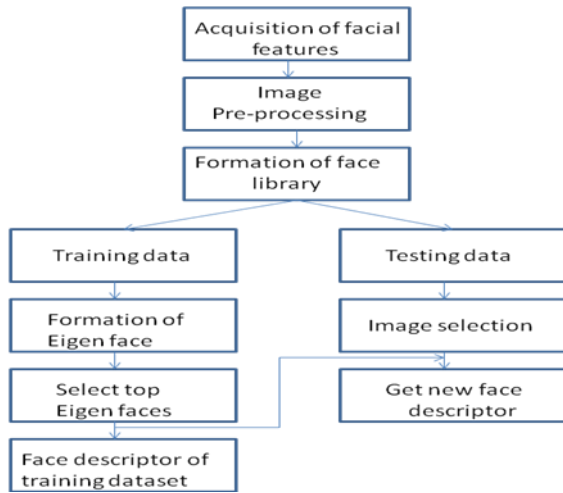


Figure 2: Face Library Formation and Face Descriptor

The original face images are calculated a best coordinate system for image compression, where each coordinates is actually an image that they termed an "Eigen picture". Any collection of face images can reconstruct by storing a small collection of weights for each face, and a small set of Eigen pictures. [7]

C. Evaluation Schemes

The back-propagation of feed-forward architecture is designed based on facial features. The neurons are organized in the form of layers. It consist of an input layer containing four neurons representing input variable to the problem, that is extracted data from the forehead wrinkle, the mid forehead wrinkle, the cheek wrinkle, and the mouth length. One hidden layers containing one or more neurons to help capture the nonlinearity in the data and an output layer containing seven nodes representing output variable to the problem that is facial expression: anger, disgust, surprise, happiness, sadness, fear and neutral. [9]

Neural network have been trained to perform complex function in various field of application such as pattern recognition, identification, classification, speech, etc. These

feature vectors are used as inputs to train the networks. In training algorithm, the face feature vectors that belong to same person are used as positive examples for the network ("1" as output), and negative examples for the others network ("0" as output), Figure 3 shows the simulation of neural network. Firstly the system gets the image as an input and it pre-process the image. In pre-processing, it removes the unwanted noise and it provide to the Eigen face. By using principle component analysis we get the highest Eigen value images and this images is provided to the neural network system for gesture recognition. [7]

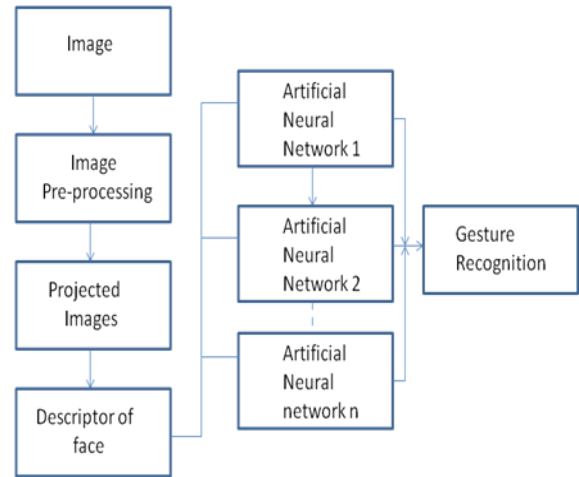


Figure 3: Simulation of Neural Network

II. RESULT AND DISCUSSION

To test the proposed solution, there are different sets of gestures of persons are prepared. These images are totally different from the learning subset of images in the sense that each image was taken at different time with different instance of gesture. In this chapter we are going to present the results from the training and the testing procedure of the algorithm and also the performance of the neural network that was designed for facial expression recognition. The database is used in order to test our methods; there are 7 different images of different expression. All the images were taken uniform background Figure 4 shows the whole set of images, with 7 different facial expressions and Table 1 shows the different performances for the different expressions. The total no of network is always equal to the no of people available in database. All the images used for the processing of neural networks, for this database the mean face of the whole database, calculated the Eigenfaces with highest Eigen values. During the training sessions, the weights and biases of the network are iteratively adjusted to minimize the network performance error. Depending on that we get the accuracy of result. In our result the accuracy of result is 80%, because many times the features of test data set and train data set are perfectly matched. But sometimes there are little bit mismatches are occurred. Here the neural network system can be described the working of neural network toolbox. In the neural network toolbox, the Trainlm is a network training function that updates weight.

Trainlm is often the fastest back-propagation algorithm in the toolbox, and is highly recommended as a first-choice supervised algorithm, although it does require more memory than other algorithms. It assumes that the network has the mean square error (mse) performance function. Trainlm can train any network as long as its weight, net input, and transfer functions have derivative functions. Back propagation is used to calculate the performance of the weight and bias variables.

Figure 4: Sets of Images with Different Facial Expressions

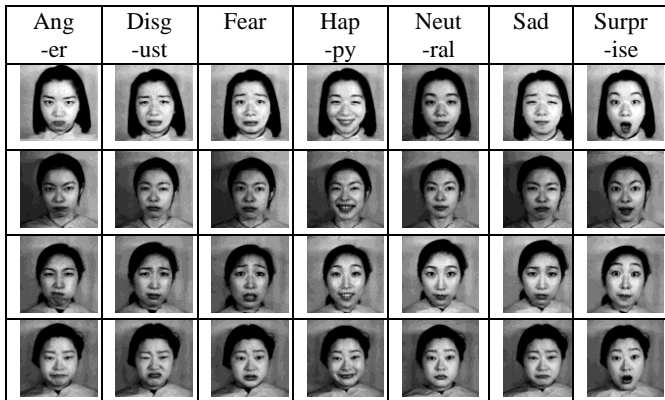


Table 1: Different Performances for the Different Expressions

Expression	Epoch	Time	Performance	Gradient	Mu	Validation Check
1 st Set of Images						
Angry	16	02	0.0067	0.009	0.01	6
Sad	11	01	0.0388	0.017	0.01	6
Fear	12	01	0.0320	0.002	0.01	6
Happy	11	01	0.0234	0.001	0.01	6
Neutral	85	02	0.0165	0.000	0.01	6
Disgust	25	01	0.0194	0.004	0.01	6
Surprise	12	01	0.0277	0.013	0.01	6
2 nd Set of Images						
Angry	11	01	0.0285	0.019	0.10	6
Sad	12	01	0.0258	0.005	0.10	6
Fear	12	01	0.0642	0.006	0.01	6
Happy	28	01	0.0214	0.019	0.01	6
Neutral	109	02	0.0165	0.004	0.01	6
Disgust	16	01	0.0169	0.002	0.01	6
Surprise	15	01	0.0140	0.005	0.01	6
3 rd Set of Images						
Angry	12	01	0.0262	0.014	0.01	6
Sad	15	01	0.0077	0.003	0.01	6
Fear	20	01	0.0181	0.003	0.01	6
Happy	11	01	0.0303	0.017	0.01	6
Neutral	18	01	0.0065	0.000	0.01	6
Disgust	09	01	0.0345	0.031	0.01	6
Surprise	10	01	0.0314	0.002	0.01	6
4 th Set of Images						
Angry	14	01	0.0204	0.007	0.01	6
Sad	19	01	0.0232	0.014	0.10	6
Fear	20	01	0.0173	0.002	0.01	6
Happy	21	01	0.0061	0.005	0.01	6
Neutral	109	02	0.0165	0.003	0.01	6
Disgust	11	01	0.0457	0.014	0.01	6
Surprise	34	01	0.0183	0.003	0.10	6

III. CONCLUSION

This work is provided for facial expression recognition that can gather about the emotion change and minimize the impact of person identity. Two main issues that are relevant to the design of FER systems were addressed. Firstly the right combination of algorithms features and second is to design a classifier, a more sophisticated face detection algorithm is necessary. Eigenfaces method is a principal component analysis approach, where the eigenvectors of the covariance matrix of a small set of characteristic pictures are sought. Recognition is performed by obtaining feature vectors from the eigenvectors space and using of neural networks to compare these feature vectors. So by using these two algorithms the system can match the features and recognize the different facial expression.

REFERENCES

1. Rheja J. L. and Kumar U., 'Human Facial Expression Recognition from Detected in Captured Image Using Back Propagation Neural Network', International Journal of Computer Science and Information Technology, February 2010.
2. Agrwal M., Jail N., Kumar M. and Agrawal H., 'Face Recognition using Eigen Faces and Artificial Neural Network', International Journal of Computer Theory and Engineering, August 2010
3. Gonzalez and Woods, Digital Image Processing, Third Edition Pearson Education, 2009
4. Ren Y., Facial Expression Recognition System, Electrical and Computer Engineering, University of Waterloo, 2008
5. Paknikar G., Facial Image Based Expression Classification System Using Committee Neural Network, University of Akron, August 2008.
6. Nagesh-Nilchi A. R. and Roshanzamir M., 'An Efficient Algorithm for Motion Detection Based Facial Expression Recognition using Optical Flow', International Journal of Engineering and Applied Science 2006
7. Mohanad N., Facial Expression Recognition using Back-propagation Network, Unrvisity Teknologi MARA, October 2004.
8. Akalin, Volkan., Face Recognition using Eigenfaces and Neural Network, M.S.,The Department of Electrical and Electronocs Enigineering, December 2003.
9. Chibelushi C.C. and Bourel F., Facial Expression Recognition: A Brief Tutorial overview, 2002.
10. Sulistijono I. A., Darojah Z., Dwijotomo A., Pramdhianto D., Facial Expression Recognition using Backpropagation,2002
11. Chang J. and Chen J., 'Automated Facial Expression Recognition System using Neural Networks', Journal of the Chinese Institute of Engineers, pp. 345-356 (2001).
12. Feitosa R. Q., Vellasco M. M. B., Facial Expression Classification using RBF and Back Propagation Neural Network,2001
13. Brimblecombe P, Face Detection using Neural Network, Meng Electronic Engineering School of Electronics and Physical Sciences, University of Surrey.
14. Haykin S., Neural Network: A Comprehensive Foundation, 1999.

AUTHORS PROFILE



Pushpaja V. Saudagare received the B.E. degree in Electronics Engineering from the H.V.P.M. College of Engineering Amravati University in 2009, and she is currently pursuing the M. Tech. degree in Electronic System and Communication (ESC) at Government College of Engineering, Amravati. Pushpaja Saudagare published review paper in international Journal of Soft Computing and Engineering.



Dr. Devendra S. Chaudhari obtained BE, ME, from Marathwada University, Aurangabad and PhD from Indian Institute of Technology, Bombay, Mumbai. He has been engaged in teaching, research for period of about 25 years and worked on DST-SERC sponsored Fast Track Project for Young Scientists. He has worked as Head Electronics and Telecommunication, Instrumentation, Electrical, Research and incharge Principal at Government Engineering Colleges. Presently he is working as Head, Department of Electronics and Telecommunication Engineering at Government College of Engineering, Amravati.

Dr. Chaudhari published research papers and presented papers in international conferences abroad at Seattle, USA and Austria, Europe. He worked as Chairman / Expert Member on different committees of All India Council for Technical Education, Directorate of Technical Education for Approval, Graduation, Inspection, Variation of Intake of diploma and degree Engineering Institutions. As a university recognized PhD research supervisor in Electronics and Computer Science Engineering he has been supervising research work since 2001. One research scholar received PhD under his supervision.

He has worked as Chairman / Member on different university and college level committees like Examination, Academic, Senate, Board of Studies, etc. he chaired one of the Technical sessions of International Conference held at Nagpur. He is fellow of IE, IETE and life member of ISTE, BMESI and member of IEEE (2007). He is recipient of Best Engineering College Teacher Award of ISTE, New Delhi, Gold Medal Award of IETE, New Delhi, Engineering Achievement Award of IE (I), Nashik. He has organized various Continuing Education Programmes and delivered Expert Lectures on research at different places. He has also worked as ISTE Visiting Professor and visiting faculty member at Asian Institute of Technology, Bangkok, Thailand. His present research and teaching interests are in the field of Biomedical Engineering, Digital Signal Processing and Analogue Integrated Circuits.