

Data Modeling, Estimation and Recovery of Dynamic and Static Sparse Signals-A Review

Sulthana Shafi, George M Joseph

Abstract: For sparse signal, compressed sensing is the present dogma, using only fewer measurements for sampling, compression and reconstruction of signals satisfying the Nyquist theorem. Here the outgrowth of compressive sensing using different algorithms for time invariant till time varying sparse signals and its recovery are surveyed. Thus these algorithms are effective in recovering dynamic and static sparse signal vectors. Algorithms exhibiting correlation and optimization approaches are reviewed. Also different mathematical models are reviewed which improves the quality of estimated solutions to best optimal solution.

Keywords: Compressed sensing, Multiple measurement vector, OFDM, Lasso, Homotopy, kalman filter, Expectation Maximization.

I. INTRODUCTION

Compressed sensing (CS) is a convex optimization technique [1], has attracted considerable attention in various areas of engineering and statistics by suggesting that it may be possible to surpass the traditional dogma of Nyquist sampling theory [2]. However, in practice, we often compress the data soon after sensing in order to be represented without error. Clearly, this is wasteful of valuable sensing resources [3]. It is of crucial importance to start thinking about the signals exhibiting sparseness [4], which allow for an economic use of sensing resources, also lessens demands for communication, saving both bandwidth and power. So Compressive sensing has emerged, in which a signal is sampled and simultaneously compressed to its “information” rate using non-adaptive, linear measurements [5]. For “sparse” signals that can be represented using just a few terms from a basis expansion, this corresponds to sub-Nyquist sampling. The compressive sensing concept has led to the development of new signal acquisition hardware and has inspired a variety of new techniques for processing sparse data[5]. The recovery algorithms for the most part are static: they focus on finding the solution for a fixed set of measurements, assuming a fixed (sparse) structure of the signal[6],[7]. Nowadays it is necessary to deal with different applications such as Orthogonal Frequency Division Multiplexing and wireless sensors, anticipating the need for dynamical settings. So sparse recovery algorithms that cater to various dynamical settings[6] are also reviewed. In the beginning, the most frequently used techniques in sparse recovery was L1-Homotopy[8],[9] and now it is substituted with an efficient optimization algorithms using Expectation Maximization techniques[10].

Revised Version Manuscript Received on June 13, 2016.

Sulthana Shafi, Electronics and Communication Engineering Department, Sree Chitra Thirunal College Of Engineering, Pappanamcode, Trivandrum, Kerala, India.

George M Joseph, Electronics and Communication Engineering Department, Sree Chitra Thirunal College Of Engineering, Pappanamcode, Trivandrum, Kerala, India.

The survey contains a discussion on the major algorithmic approaches to sparse recovery. In this review, we briefly describe these methods along with the mathematical modelings.

II. MATHEMATICAL MODELLING

This paper mainly aiming to extend the mathematical models explained by the authors in [8],[9],[10],[11],[12],[13],[14].

A. Single Measurement Vector (SMV) Model

The most basic model in sparse signal recovery is the single measurement vector (SMV) model [19],[20] given by:

$$Y = \phi X + V \dots \dots \dots (1).$$

where $Y \in R^{M \times 1}$ is an available measurement vector, $\phi \in R^{M \times N}$ ($M \ll N$) is a known matrix[21], $X \in R^{N \times 1}$ is an unknown vector which we want to estimate, and $V \in R^{M \times 1}$ is an unknown noise vector[22]. Generally, the ϕ matrix is assumed to satisfy the unique representation property (URP) [11],[23],[24]. In compressed sensing, it is called a sensing matrix or a measurement matrix [24] and in signal representation, it is called a basis matrix or a dictionary matrix [11],[25],[26]. The problem $Y = \phi X + V$ is an underdetermined inverse problem. Generally, there are infinite solutions. Thus, it is impossible to find the true solution.

However, when the true solution is sufficiently sparse, it is possible to find it with small errors [11],[27],[28] or even exactly in some cases [11],[29]. However, this approach is NP-hard [11],[30]. So alternative algorithms were proposed to seek the sparsest. In Section IV, we will discuss it in detail.

B. Block Sparse Model

Another class of widely used model is block/group structure [19]. With this structure, X can be viewed as a concatenation of blocks, i.e.,

$$X = (x_1, \dots \dots x_{d_1}, \dots x_{d_g - 1}, \dots x_{d_g})^T \dots \dots (2)$$

Where d_i for all i are not necessarily identical [11],[31],[32],[33],[34],[35]. Among these blocks, only a few blocks are nonzero but their locations are unknown [11],[28],[36]. The SMV model with the block partition is called the canonical block sparse model [11],[28],[36]. In section IV, algorithms utilizing the intra-block correlation to improve recovery performance are discussed.

C. Multiple Measurement Vector (MMV) Model

The basic SMV model can be extended to the Following multiple measurement vector (MMV) model [11],[37],[38],[39].

$$Y = \phi X + V \dots\dots\dots(3)$$

Where $Y = [Y_1, \dots, Y_L] \in R^{M \times N}$ consists of measurement vectors, $X = [X_1, \dots, X_L] \in R^{M \times N}$ is the desired solution matrix, and V is an unknown noise matrix[6],[37]. A key assumption in the MMV model is that the support (i.e. indexes of nonzero entries) of every column in X is identical (referred as the common sparsity assumption in literature [37],[39]). In addition, similar to the constraint in the SMV model, the number of nonzero rows in X has to be below a threshold to ensure a unique and global solution [11],[37],[39]. This leads to the fact that X has a small number of nonzero rows. It has been shown that compared to the SMV case, the successful recovery rate of the support can be greatly improved using multiple measurement vectors [37], [39], [40], [41],[42]. It is worth pointing out [11] that in practical applications (e.g. source localization), there is correlation among the entries in each nonzero row of X [43]. If ignoring the correlation, it can deteriorate algorithm's recovery performance. Unfortunately, most existing MMV algorithms ignored the correlation.

D. Time-Varying Sparse Model

MMV model cannot obtain the common sparsity assumption always. In many practical signals, the common sparsity assumption is valid for only a small L in the MMV model [37]. Thus, the time-varying sparsity model is a natural extension of the MMV model [43]. When MMV from different source signal with common support are available, accuracy of sparse signal recovery can be improved by performing joint processing of their vectors [11],[44]. It considers the case when the support of each column of X is time-varying[11],[43]. The measurement model in this case is given [43] by

$$Y^T = \phi X^T + V^T \dots\dots\dots (4)$$

Where, $Y^T \in R^{M \times 1}$ is a measurement vector, $X^T \in R^{N \times 1}$ is the sparse signal with time-varying sparsity [43], and V^T is a noise vector. To deal with time-varying sparsity[43], many algorithms have been proposed, such as Kalman lters [11],[45] or Bayesian approach estimation/prediction [11],[46],[47], algorithms based on the sparsity of the unknown part of the support [11],[48], algorithms based on message passing [11],[49], and algorithms based on homotopy continuation principles[11],[50]. Most of the algorithms employ SMV algorithms to find the turn on coefficients at each snapshot. However, since the support of x_t is changing slowly[43], we can view such a time varying sparsity model as a concatenation of several MMV models, wherein the temporal correlation[20] in each MMV model can be exploited to further improve the support recovery rate[11].

E. Spatiotemporal Sparse Model

A MMV model with assumptions that matrix X has spatiotemporal correlation. It can be described as:

$$Y = \phi X + V \dots\dots\dots (5)$$

where $Y \in R^{M \times 1}$ is an available measurement vector, $\phi \in R^{M \times N}$ ($M < N$) is a known matrix[20], $X \in R^{N \times 1}$ is an

unknown vector which we want to estimate, and $V \in R^{M \times 1}$ is an unknown noise vector.

$$X = [X_1, \dots, X_J] \dots\dots\dots(6)$$

Where $X_i \in R^{d_i \times 1}$ is the i -th block of X , and $\sum_{i=1}^g d_i = N$ and d_1, \dots, d_J is called the block partition. Among the g blocks, only a few are nonzero blocks [11],[51]. The entries in each column of X_i are correlated (intra-block correlation), and entries in each row of X_i are also correlated (temporal correlation)[11],[52]. Thus, the model can be seen as the combination of the canonical MMV model and the canonical block sparse model[11],[53].

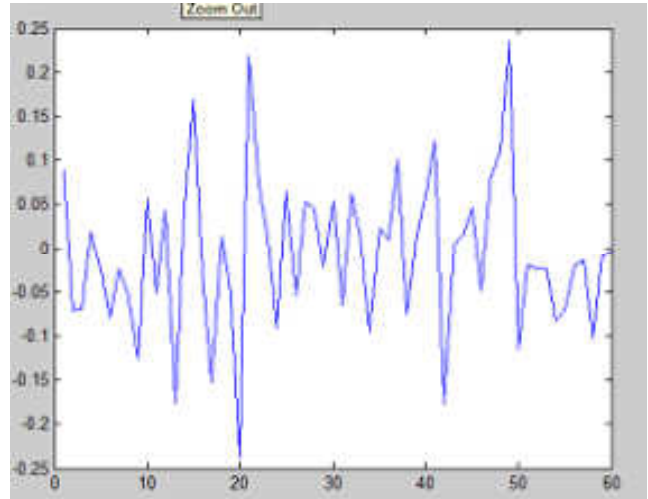


Figure 1. Time varying MMV Model

An Experimental result of time-varying MMV model designed is shown in Figure 1.

III. SIGNAL RECOVERY

Signal recovery using Compressive Sensing are broadly categorized into 2 classes [54]

(1) Deterministic signal model

- i. Underlying signal is seen on deterministic vector [44].
- ii. Sparsity promoting cost function (e.g.:- L1 norm) is employed to solve the problem[44].
- iii. Approach include basis pursuit (BP), orthogonal matching pursuit (OMP) and its variants[44].
- iv. MMV based recovery algorithm targeted for deterministic signal recovery include mixed norm solution and convex relaxation.

(2) Probabilistic signal model

- i. Signal sparsity is described by apriori distribution of signal and Bayesian framework is employed in finding sparse solution[44].
 - ii. MMV based recovery algorithm include MMV sparse Bayesian learning (SBL), Block SBL, Auto – regressive SBL and kalman filtering based SBL[44].
- The apriori knowledge of probability is not easily predictable. So deterministic signal model is most appropriate in most applications. However, In OFDM signals, all signals are equally probable, it is possible to prefer either deterministic or probabilistic signal model.

IV. OUTGROWTH OF ALGORITHMS FOR SIGNAL RECOVERY

Algorithms for Signal recovery as described in [11],[12],[13],[14],[15],[16],[17],[18],[55] by the authors are discussed here.

To recover sparse time varying signals, impose sparse constraints on either particle level, estimate level or both [56]. Here, due to slow variation of signal; sub sparse, estimation of channel parameter is translated into unconstrained minimization problem. Optimization approach [11] can be of:

a) Convex approach

With some conditions on ϕ and x , it can be shown [11],[27],[57],[58] that the true solution of (1) can be found within the noise level by solving the following minimization problem[59]:

$$\min: \|X\|_1 \text{ st: } \|Y - \phi X\|_2^2 \dots \dots \dots (7)$$

Where ϕ is a regularizer. Note that there are other equivalent forms, such as the one using the Lagrange multiplier:

$$X = \operatorname{argmin}_x \|Y - \phi X\|_2^2 + \lambda \|X\|_1 \dots \dots \dots (8)$$

Where λ is another regularizer. There are many solvers [60],[61] to the convex relaxation problems. Group fused lasso assumes time invariant support but allows non zero components of signal vary over time. This is a batch algorithm which relies on quadratic programming to recover unknown signals [55],[56].

The Recursive-Lasso algorithm estimates the sparse signal at each point in time recursively [56]. It is computationally more efficient [55] than group fused lasso. SPARLS algorithm [55] uses Expectation Maximization technique, estimating output vector stream from its noisy observation.

The major drawbacks of these algorithms is that one needs to tune the regularizers although there are methods to guide the tuning, such as the L-curve method [62],[63], cross-validation, and model selection [64],[65] in some applications the tuning is very difficult or even impossible. Thus, the selection of optimal λ or ϕ remains an important topic. Recent progress on this can be found in [66],[67]. Also the global minimum generally does not correspond to the sparsest solution unless strict conditions on ϕ and x are satisfied[19].

b) Non-convex minimization

Algorithms [6],[68] in this family seek a solution with minimal l_p norm, where $0 < p < 1$. Mathematically, they solve the following non-convex minimization problem:

$$X = \operatorname{argmin}_x \|Y - \phi X\|_2^2 + \lambda \|X\|_p \dots \dots \dots (9)$$

$$\|X\|_p = (\sum_i |x_i|_p)^{\frac{1}{p}} \text{ and } (0 < p < 1) \dots \dots \dots (10)$$

Solving this problem generally leads to an iterative reweighted algorithm. The most famous one may be the FOCUSS algorithm [23],[69] which has been widely used in Neuromagnetic source localization [70]. These non-convex minimization algorithms also need to solve the issue of optimal choice of λ .

c) Smooth approximation of l_0 norm of X

$$\|X\|_0 = \sum_i I(x_i \neq 0) \dots \dots \dots (11)$$

Where $I(\cdot)$ is the indicator function[37]. They have the quality of high speed, and have excellent recovery performance in noiseless case and they have the disadvantage of robustness to noise [11],[71],[72].

d) Greedy algorithms

It works with high speed. Their recovery performance is strongly affected by the coherence among columns of ϕ , and doesn't work well in noisy scenarios[22]. These drawbacks limit their applications to some problems such as source localization and tracking [11],[19],[22],[73],[74],[75],[76].

e) Message passing algorithms [11],[77],[78],[79] is a young group, but recently developed algorithms have shown excellent performance in some applications in terms of both speed and recovery performance. However, most algorithms cannot be used in the case when columns of ϕ are coherent.

From the review, it is clear that Sparse recovery with partially known support known as modified CS gives good performance, for dynamic fitting.

f) LSCS Residual, thus imposed sparsity on least square residual computed using support from previous time instant. Optimization attempts to minimize the change in support which is expected to be much more sparse than original signal[55],[56].

g) Kalman filter/Unscerted Kalman filtering [55],[56] based method whose sparsity constraints is enforced via so called pseudo measurements. Two stages of Kalman filtering are employed

- i For tracking temporal changes
- ii Other for enforcing sparsity constraints at each stage.
- h) Homotopy Algorithm:[8],[80] for quickly solving weighed l_1 norm minimization problem for streaming signal recovery.

Lassohomotopy[8],[80]:Sequentially estimating overlapping components of streaming signal while adding and removing measurements, instead of solving new optimization problem at every iteration, existing signal estimate is used as starting point (warm-start).

LI-Homotopy[9]-For solving l_1 norm minimization problems using homotopy techniques. These problems are usually encountered in the recovery of sparse signals from linear incoherent measurements[7]. LI Homotopy Dynamic updating moves the solution along piecewise continuous homotopy path, using previous signal estimate as a starting point[81].

This homotopy package can solve foll: optimization problems:-

- (i) Basis pursuit denoing (BPDN)/LASSO
- (ii) Dantzig selector
- (iii) l_1 decoding, rebust l_1 decoding
- (iv) Re-weighted l_1 -norm (iterative and adaptive reweighing)

In addition to solving these problems for any given set of parameters, we have some dynamic algorithm to update their solution in the case of streaming signal recovery, when new measurements are sequentially added to the system[82], when the unknown signals varies over time and we get a

new measurement vector.

The linear model: $Y=AX+e$ is used . It is to solve weighed l_1 norm minimization program.Solution of homotopy program changes from warm start vector to desired solution, as e changes from 0 to 1.

i) Bayesian algorithms:

It is a powerful algorithm. Sparse Bayesian Learning Algorithms [83],[84],[85],[86],[87],

[88],[89],[90],[91],[92] are again classified into its subgroups:

a) T-MSBL/T-SBL model as explained in [12],[13],[14],[15],[16],[17],[18] by the authors, is used for MMV model $Y=AX+V$; It exploits the temporal correlation exist in each non zero row of X [37]. It is used when matrix A is highly coherent [37]. In MMV model, Temporal correlation is utilized in single MV(SMV), no temporal information can be exploited. In SMV, it still has better performance than many algorithms in noisy environment. It is used in time varying sparsity model/dynamic compressed sensing model as support of each source vector X : (i) is slowly time varying we can use the concatenate of MMV model to approximate this scenario.

2 Algorithms in it are iterative reweighed L_2 version of T-SBL and iterative reweighed L_1 version of T-SBL. Key idea used here is the replacement of L_q norm (eg: L_2 norm) with Mahalanobis distance measure Eg: Original MFOCUSS uses iterative reweighed L_2 algorithm. Here Mahalanobis distance measure replaces it.

b) B - SBL for recovery of block/Group Sparse signals[93]. The B-SBL as explained in [12],[13],[14],[15],[16],[17],[18] by the authors exploits intra-block correlation in the block sparse model[28]. It can successfully solve: (i) Recovery of Block/Group sparse with block partition[20] (partition can be known or unknown) (ii)Recovery of Non-sparse signals with or without any structure[21] (not necessary is the block structure).

Algorithms derived from it are (i)BS BL-EM, gives the best performance but slowest(ii)BS BL-BO is the one with the balanced performance and speed (iii)BS BL-LI is the fastest but performance slightly inferior to other two. It provide strategies to improve the existing algorithm of group lasso so that they can also effectively explain inter-block correlation.

j) EM-GM-GAMP:

An algorithm[10],[78],[94] for sparse Representation Expectation maximization Gaussian mixture Approximate Message passing is an algorithm designed to recover a signal x from noisy measurements. The signal model is $Y=Ax+w$. Particularly, when measurements are under sampled ie, $M < N$ with sufficient signal sparsity and well-conditioned mixing matrix, signal recovery is possible[94].

EM-GM-GAMP-assumes sparsity promoting iid Gaussian mixture prior [94]. After running GM-AMP, it then find Expectation Maximization (EM) update and repeats GM-AMP until convergence [94]. It support MMV model as well as both real and complex signals. EM algorithm [44] is efficient to find out ML or MAP estimate of signal model. It is more flexible version of EM Bernoulli Gaussian AMP[94].

An Experimental result of estimated and original signal designed with the basic time-varying MMV model (fig.1) using Expectation Maximization Algorithm in figure 2.

The accuracy of the result developed can be highly tuned by designing compressed sensing matrix/sensing matrix [95] more precisely and using the fast convergence algorithm for the recovery, which is an investigative area to be emphasized while designing the sparse signal.

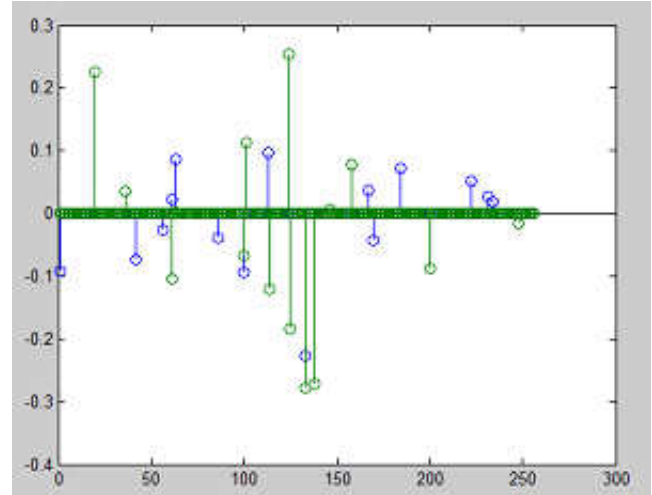


Figure 2. Estimated signal in blue and Original Signal in green

V. APPLICATIONS

It is used in applications such as Audio and image compression, DOA estimation, Wireless telemonitoring of physiological signal, Under sampled MRI Signal and Pattern recognition [96],[97],[98]. With the advances in sensor technology[55],[3], the amount of data produced by pervasive sensors is large. A huge volume of such data is generated by numerous systems. The spatially separated agents sample the data, which is then transported the data to a central server for further processing[3]. It is a crucial task to gather only the informative data for the requirement. Thus a reduction in the sensing cost, data storage, processing overhead, and communications bandwidth can be observed [3].

In OFDM[99] for channel estimation,channel response at pilot sub carriers are calculated with Least Square (LS)Methods[100],parameters of each path are estimated and tracked to improve accuracy of estimation at pilot sub carriers and finally channel response at all N sub carriers is obtained [101].

The technique to be applied for OFDM in sequence [102] are:

1. Translating estimated channel Parameters into unconstrained minimization Problem for low dimensional signal space.
2. Solving unconstrained minimization problem via tracking method. eg:-Kalman Filter..

VI. CONCLUSIONS

The purpose of this paper is to discuss various algorithms to find solution to an under-determined inverse problem. A careful examination on the signal to be recovered is required such that it should be represented in its sparse representation

to improve the quality to its best optimal solution. A detailed survey on theoretic, algorithmic, mathematical modeling on sparse signal recovery and its recovery problems in static and dynamic case are reviewed. The Algorithms exhibiting correlation and using optimization approach is giving the highest degree of performance. Utilizing these algorithms, effectiveness can be improved by combining a good design for the sensing matrix.

ACKNOWLEDGEMENT

We gratefully acknowledge the generous assistance and valuable information provided to us by Vikram Sarabhai Space Centre, headed by Dr. Apren T J. We would also like to thank reviewers for their valuable and helpful suggestions. We would also like to thank the faculties, the resource providers and the system administrator for the useful feedback and constant support.

REFERENCES

- Haifeng, Li, Li Rui and Li Bei, "Block MMV for the reconstruction of multiband signals", 34th Chinese Control Conference (CCC), 2015.
- Emmanuel j candeos, Ecolepolytech, Paris Micheal B Wakin, "An Introduction To Compressive Sampling", IEEE trans. on signal processing, Vol.25, No.2, march 2008.
- Chepuri, Sundeep Prabhakar, and Geert Leus, "Compression schemes for time-varying sparse signals", 48th Asilomar Conference on Signals Systems and Computers, 2014.
- Shamaiah, Manohar, and Haris Vikalo, "Estimating Time-Varying Sparse Signals Under Communication Constraints", IEEE Transactions on Signal Processing, 2011.
- Dsp.rice.edu Internet source.
- Muhammed Salman Asif, "Dynamic Compressive Sensing: Sparse Recovery Algorithm For Streaming Signals And Video", Georgia Institute Of Technology, 2013.
- users.ece.gatech.edu ,Internet Source.
- M.S Asif and J Romberg, "Sparse Recovery Of Streaming Signals Using L1 Homotopy", IEEE trans. on signal processing ,Vol. 62, No.16, pp. 4209-4223, 2014.
- " L1-Homotopy:-A Matlab Toolbox for Homotopy Algorithm in L1 Norm Minimization problem." [Online]
- "EM-GM GAMP: An algorithm for sparse Representation." [Online]
- Zhang, Zhilin, "Sparse Signal Recovery Exploiting Spatiotemporal Correlation", Series: UC San Diego Electronic Theses and Dissertations, signal and image processing, 2012.
- Zhilin Zhang, "Sparse Signal Recovery with Temporally Correlated Source Vectors Using Sparse Bayesian Learning.", IEEE Journal of Selected Topics in Signal Processing ,vol. 5, no. 5, pp. 912-926, 2011.
- Zhilin Zhang, Bhaskar D. Rao, " Exploiting Correlation in Sparse Signal Recovery Problems: Multiple Measurement Vectors, Block Sparsity, and Time-Varying Sparsity", ICML 2011 Workshop on Structured Sparsity: Learning and Inference, July, 2011 .
- Zhilin Zhang ,Bhaskar D. Rao, "Iterative Reweighted Algorithms for Sparse Signal Recovery with Temporally Correlated Source Vectors", ICASSP, 2011.
- Zhilin Zhang, Bhaskar D. Rao, " Sparse Signal Recovery in the Presence of Correlated Multiple Measurement Vectors", ICASSP, 2010.
- Zhilin Zhang, Bhaskar D. Rao, " Clarify Some Issues on the Sparse Bayesian Learning for Sparse Signal Recovery", Technical Report, 2011.
- Zhilin Zhang, Tzzy-Ping Jung, Scott Makeig, Zhouyue Pi, Bhaskar D. Rao, "Spatiotemporal Sparse Bayesian Learning with Applications to Compressed Sensing of Multichannel Physiological Signals", IEEE Trans. On Neural Systems and Rehabilitation Engineering, vol. 22, no. 6, pp. 1186-1197, 2014.
- Zhilin Zhang, Bhaskar D. Rao, Tzzy-Ping Jung, " Compressed Sensing for Energy-Efficient Wireless Telemonitoring: Challenges and Opportunities", Asilomar Conference on Signals, Systems, and Computers (Asilomar 2013), California, 2013 .
- Submitted to University of Hong Kong.
- Zhang, Z., and B. Rao. "Extension of SBL Algorithms for the Recovery of Block Sparse Signals with Intra- Block Correlation", IEEE Transactions on Signal Processing, 2013.
- Zhang, Zhilin, and Bhaskar D. Rao. "Recovery of block sparse signals using the framework of block sparse Bayesian learning", IEEE International Conference on Acoustics Speech and Signal Processing (ICASSP), 2012.
- Soussen, Charles, Jerome Idier, David Brie, and Junbo Duan, "From Bernoulli Gaussian Deconvolution to Sparse Signal Restoration", IEEE Transactions on Signal Processing, 2011.
- F. Gorodnitsky and B. D. Rao, "Sparse signal reconstruction from limited data using FOCUSS: a reweighted minimum norm algorithm.", IEEE Trans. on Signal Processing, vol. 45, no. 3, pp. 600-616, 1997.
- D. Donoho, "Compressed sensing," Information Theory, IEEE Transactions on., vol. 52, no. 4, pp. 1289-1306, 2006.
- Applied and Numerical Harmonic Analysis, 2013.
- E. Candes, J. Romberg, and T. Tao, "Stable signal recovery from incomplete and inaccurate measurements," Communications on pure and applied mathematics, vol. 59, no. 8, pp. 1207-1223, 2006.
- www.dsp.ece.rice.edu ,Internet Source.
- E. Candes and T. Tao, "Decoding by linear programming," Information Theory, IEEE Transactions on, vol. 51, no. 12, pp. 4203-4215, 2005.
- Wei, Wang, Jia Min, and Guo Qing. "A compressive sensing recovery algorithm based on sparse Bayesian learning for block sparse signal", International Symposium on Wireless Personal Multimedia Communications (WPMC), 2014.
- B. Natarajan, "Sparse approximate solutions to linear systems," SIAM journal on computing, vol. 24, no. 2, pp. 227-234, 1995.
- M. Yuan and Y. Lin, "Model selection and estimation in regression with grouped variables," J. R. Statist. Soc. B, vol. 68, pp. 49-67, 2006.
- R. G. Baraniuk, V. Cevher, M. F. Duarte, and C. Hegde, "Model-based compressive sensing," IEEE Transactions on Information Theory, vol. 56, no. 4, pp. 1982-2001, 2010.
- Y. C. Eldar, P. Kuppinger, and H. Bolcskei, "Blocksparse signals: uncertainty relations and efficient recovery," IEEE Transactions on Signal Processing, vol. 58, no. 6, pp. 3042-3054, 2010.
- M. Stojnic, F. Parvaresh, and B. Hassibi, "On the reconstruction of blocksparse signals with an optimal number of measurements," IEEE Transactions on Signal Processing, vol. 57, no. 8, pp. 3075-3085, 2009.
- E. Elhamifar and R. Vidal, "Block-sparse recovery via convex optimization," Signal Processing, IEEE Transactions on, vol. 60, no. 8, pp. 4094-4107, 2012.
- Zhang, Z., Tzzy-Ping Jung, S. Makeig, and B.D. Rao. "Compressed Sensing for Energy-Efficient Wireless Telemonitoring of Non-Invasive Fetal ECG via Block Sparse Bayesian Learning", IEEE Transactions on Biomedical Engineering, 2012.
- dsp.ucsd.edu, Internet Source.
- B. D. Rao and K. Kreutz-Delgado, "Sparse solutions to linear inverse problems with multiple measurement vectors," in Proc. IEEE Digital Signal Processing Workshop, Bryce Canyon, UT, 1998.
- S. F. Cotter, B. D. Rao, K. Engan, and K. Kreutz-Delgado, "Sparse solutions to linear inverse problems with multiple measurement vectors," IEEE Trans. On Signal Processing, vol. 53, no. 7, pp. 2477-2488, 2005.
- Y. C. Eldar and M. Mishali, "Robust recovery of signals from a structured union of subspaces," IEEE Trans. On Information Theory, vol. 55, no. 11, pp. 5302-5316, 2009.
- Y. C. Eldar and H. Rauhut, "Average case analysis of multichannel sparse recovery using convex relaxation," IEEE Trans. on Information Theory, vol. 56, no. 1, pp. 505-519, 2010.
- Y. Jin and B. Rao, "Support recovery of sparse signals in the presence of multiple measurement vectors," arXiv preprint arXiv:1109.1895, 2011.
- Rao, Bhaskar D., Zhilin Zhang, and Yuzhe Jin, "Sparse signal recovery in the presence of intra-vector and intervector correlation", International Conference on Signal Processing and Communications (SPCOM), 2012.
- Choi, Jun, and Byonghyo Shim. "Statistical Recovery of Simultaneously Sparse Time-Varying Signals from Multiple Measurement Vectors", IEEE Transactions on Signal Processing, 2015.
- N. Vaswani, "Kalman filtered compressed sensing," in Proc. of the 15th IEEE International Conference on Image Processing (ICIP 2008), San Diego, USA, 2008, pp. 893-896.
- D. Zechariah, S. Chatterjee, and M. Jansson, "Dynamic iterative pursuit," Signal Processing, IEEE Transactions on, vol. 60, no. 9, pp. 4967-4972, 2012.
- D. Sejdinovic, C. Andrieu, and R. Piechocki, "Bayesian sequential compressed sensing in sparse dynamical systems," in Communication, Control, and Computing (Allerton), 2010 48th Annual Allerton Conference on, 2010, pp. 1730-1736.

48. N. Vaswani and W. Lu, "Modiin^A,ed-CS: Modifying compressive sensing for problems with partially known support," *Signal Processing, IEEE Transactions on*, vol. 58, no. 9, pp. 4595-4607, 2010.
49. J. Ziniel and P. Schniter, "Dynamic compressive sensing of time-varying signals via approximate message passing," *arXiv preprint arXiv:1205.4080*, 2012.
50. M. Salman Asif and J. Romberg, "Dynamic updating for '1 minimization," *Selected Topics in Signal Processing, IEEE Journal of*, vol. 4, no. 2, pp. 421-434, 2010.
51. Zhang, Zhilin, Bhaskar D. Rao, and Tzyy-Ping Jung, "Compressed sensing for energy-efficient wireless telemonitoring: Challenges and opportunities", *Asilomar Conference on Signals Systems and Computers*, 2013.
52. Wan, Jing, Zhilin Zhang, Bhaskar D. Rao, Shiaofen Fang, Jingwen Yan, Andrew J. Saykin, and Li Shen. "Identifying the Neuroanatomical Basis of Cognitive Impairment in Alzheimer's Disease by Correlation- and Nonlinearity-Aware Sparse Bayesian Learning", *IEEE Transactions on Medical Imaging*, 2014.
53. boufounos.com, Internet Source.
54. 3b Jun Won Choi and Byonghyo Shim, "Statistical Recovery Of Simultaneously Sparse Time Varying Signals From MMV", *IEEE trans. on signal processing*, Vol. 63, No.22, pp. 6136 - 6148, 2015.
55. 4b M. Shamaiah and H. Vikalo, "Estimation Of Time Varying Sparse Signal In Sensor Networks.", *IEEE trans. on signal processing*, Vol. 59, No.6, pp. 2961 - 2964, 2011.
56. Shamaiah, Manohar, and Haris Vikalo, "Estimation of Time-Varying Sparse Signals in Sensor Networks", *Signals and Communication Technology*, 2014.
57. D. L. Donoho and M. Elad, "Optimally sparse representation in general (nonorthogonal) dictionaries via l1 minimization," *PNAS*, vol. 100, no. 5, pp. 2197 - 2202, 2003.
58. M. Elad, "Sparse representations are most likely to be the sparsest possible," *EUROSIP Journal on Applied Signal Processing*, vol. 2006, pp. 1-12, 2006.
59. *arxiv.org*, Internet Source.
60. R. Tibshirani, "Regression shrinkage and selection via the lasso," *Journal of the Royal Statistical Society. Series B (Methodological)*, vol. 58, no. 1, pp. 267-288, 1996.
61. Y. Cho and L. K. Saul, "Sparse decomposition of mixed audio signals by basis pursuit with autoregressive models," in *Proc. of the 34th International Conference on Acoustics, Speech, and Signal Processing (ICASSP 2009)*, Taipei, pp. 1705-1708.
62. P. Hansen, "Analysis of discrete ill-posed problems by means of the l - curve," *SIAM review*, vol. 34, no. 4, pp. 561-580, 1992.
63. P. Hansen and D. O Leary, "The use of the l - curve in the regularization of discrete ill-posed problems," *SIAM Journal on Scientific Computing*, vol. 14, no. 6, pp. 1487 - 1503, 1993.
64. C. Stein, "Estimation of the mean of a multivariate normal distribution," *The annals of Statistics*, pp. 1135- 1151, 1981.
65. V. Solo, "A sure - fired way to choose smoothing parameters in ill conditioned inverse problems," in *Image Processing, 1996. Proceedings., International Conference on*, vol. 3, 1996, pp. 89-92.
66. R. Tibshirani, J. Bien, J. Friedman, T. Hastie, N. Simon, J. Taylor, and R. Tibshirani, "Strong rules for discarding predictors in lasso-type problems," *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, vol. 74, no. 2, pp. 245-266, 2012.
67. T. Sun and C.-H. Zhang, "Scaled sparse linear regression," *Biometrika*, vol. 99, no. 4, pp. 879-898, 2012.
68. Jiawei Zhou, Laming Chen and Yuantao Gu, "Dynamic Zero Point Attracting Projection For Time-Varying Sparse Signal Recovery", *National Natural Science Foundation Of China, IEEE*, 2015.
70. B. D. Rao, K. Engan, S. F. Cotter, J. Palmer, and K. Kreutz-Delgado, "Subset selection in noise based on diversity measure minimization," *IEEE Trans. on Signal Processing*, vol. 51, no. 3, pp. 760-770, 2003.
71. Gorodnitsky, J. George, and B. Rao, "Neuromagnetic source imaging with focuss: a recursive weighted minimum norm algorithm," *Electroencephalography and clinical Neurophysiology*, vol. 95, no. 4, pp. 231-251, 1995.
72. H. Mohimani, M. Babaie-Zadeh, and C. Jutten, "A fast approach for overcomplete sparse decomposition based on smoothed l0 norm," *IEEE Trans. on Signal Processing*, vol. 57, no. 1, pp. 289-301, 2009.
73. Seneviratne and V. Solo, "On vector l0 penalized multivariate regression," in *Acoustics, Speech and Signal Processing (ICASSP), 2012 IEEE International Conference on*. IEEE, 2012, pp. 3613-3616.
74. S. Mallat and Z. Zhang, "Matching pursuits with time frequency dictionaries," *Signal Processing, IEEE Transactions on*, vol. 41, no. 12, pp. 3397-3415, 1993.
75. D. Needell and J. A. Tropp, "CoSaMP: Iterative signal recovery from incomplete and inaccurate samples," *Applied and Computational Harmonic Analysis*, vol. 26, no. 3, pp. 301-321, 2009.
76. J. Tropp and A. Gilbert, "Signal recovery from random measurements via orthogonal matching pursuit," *Information Theory, IEEE Transactions on*, vol. 53, no. 12, pp. 4655-4666, 2007.
77. W. Dai and O. Milenkovic, "Subspace pursuit for compressive sensing signal reconstruction," *Information Theory, IEEE Transactions on*, vol. 55, no. 5, pp. 2230-2249, 2009.
78. W. Dai and O. Milenkovic, "Subspace pursuit for compressive sensing signal reconstruction," *Information Theory, IEEE Transactions on*, vol. 55, no. 5, pp. 2230-2249, 2009.
79. J. Vila and P. Schniter, "Expectation-maximization Gaussian-mixture approximate message passing," *arXiv:1207.3107*, 2012.
80. .M. Bayati and A. Montanari, "The dynamics of message passing on dense graphs, with applications to compressed sensing," *Information Theory, IEEE Transactions on*, vol. 57, no. 2, pp. 764-785, 2011.
81. Asif, M. Salman, and Justin Romberg. "Sparse Recovery of Streaming Signals Using l1 Homotopy", *IEEE Transactions on Signal Processing*, 2014.
82. Zhou, Jiawei, Laming Chen, and Yuantao Gu, "Dynamic zero-point attracting projection for time-varying sparse signal recovery", *IEEE International Conference on Acoustics Speech and Signal Processing (ICASSP)*, 2015.
83. Hao, Jinping, Filippo Tosato, and Robert J. Piechocki, "Sequential Compressive Sensing in Wireless Sensor Networks", *2012 IEEE 75th Vehicular Technology Conference (VTC Spring)*, 2012.
84. P. Schniter, L. Potter, and J. Ziniel, "Fast Bayesian matching pursuit," in *Information Theory and Applications Workshop*, 2008, 2008, pp. 326-333.
85. H. Zayyani, M. Babaie-Zadeh, and C. Jutten, "Bayesian pursuit algorithm for sparse representation," in *Acoustics, Speech and Signal Processing, 2009. ICASSP 2009. IEEE International Conference on*, 2009, pp. 1549-1552.
86. C. Herzet and A. Dremeau, "Bayesian Pursuit Algorithms" [Online]. Available: <http://hal.inria.fr/hal-00673801>.
87. M. Tipping, "Sparse Bayesian learning and the relevance vector machine," *The Journal of Machine Learning Research*, vol. 1, pp. 211-244, 2001.
88. D. Wipf and B. Rao, "Sparse Bayesian learning for basis selection," *IEEE Transactions on Signal Processing*, vol. 52, no. 8, pp. 2153-2164, 2004.
89. X. Tan and J. Li, "Computationally efficient sparse Bayesian learning via belief propagation," *IEEE Transactions on Signal Processing*, vol. 58, no. 4, 2010.
90. .K. Qiu and A. Dogandzic, "Variance-component based sparse signal reconstruction and model selection," *IEEE Trans. on Signal Processing*, vol. 58, no. 6, pp. 2935- 2952, 2010.
91. . S. Ji, Y. Xue, and L. Carin, "Bayesian compressive sensing," *IEEE Transactions on Signal Processing*, vol. 56, no. 6, pp. 2346-2356, 2008.
92. M. Figueiredo, "Adaptive sparseness for supervised learning," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 25, no. 9, pp. 1150-1159, 2003.
93. S. Babacan, R. Molina, and A. Katsaggelos, "Bayesian compressive sensing using laplace priors," *Image Processing, IEEE Transactions on*, vol. 19, no. 1, pp. 53-63, 2010.
94. Bajwa, Waheed U., Marco F. Duarte, and Robert Calderbank. "Conditioning of Random Block Subdictionaries With Applications to Block-Sparse Recovery and Regression", *IEEE Transactions on Information Theory*, 2015.
95. *nuit-blanche.blogspot.ca*, Internet Source.
96. Guangwu Xu and Zhiqiang Xu, "Compressed Sensing Matrices From Fourier Matrices", *IEEE Transactions on Information Theory*, vol. 61, no. 1, jan 2015.
97. Z. Zhang, T.-P. Jung, S. Makeig, and B. D. Rao, "Compressed sensing for energy-efficient wireless telemonitoring of non-invasive fetal ECG via block sparse Bayesian learning," *IEEE Trans. on Biomedical Engineering*, accepted.
98. "Compressed sensing of EEG for wireless telemonitoring with low energy consumption and inexpensive hardware," *IEEE Trans. on Biomedical Engineering*, accepted.
99. "Spatiotemporal sparse Bayesian learning with applications to compressed sensing of multichannel ECG for wireless telemonitoring," submitted to *IEEE Trans. on Biomedical Engineering*, 2012.
100. Ranjitha prasad, Chandra R. Murthy and Bhaskar D. Rao, "Joint Channel Estimation and Data Detection in MIMO-ofdm Systems: A Sparse Bayesian Learning Approach" , *Signal Processing, IEEE Transactions on*, vol. 63, no. 20, 2015.

101. Jing Wang. "Low-complexity Subspace Tracking Based Channel Estimation Method for OFDM Systems In Time-Varying Channels", IEEE International Conference on Communications, 06/2006.
102. Huang, M., X. Chen, L. Xiao, S. Zhou, and J. Wang. "Kalman-filter-based channel estimation for orthogonal frequency-division multiplexing systems in time-varying channels", IET Communications, 2007.
103. Jing Wang, "Low-complexity Subspace Tracking Based Channel Estimation Method for OFDM Systems In Time-Varying Channels", 2006 IEEE International Conference on Communications, 06/2006